

Series
NSX

SIZE 1 UNSEALED COAXIAL SOCKET CONTACT
FOR RG214 AND RG393 CABLES
BOEING P/N: BACC47EN-1A AND EN-2A

Issue:
22 APRIL 07

Page
1/1


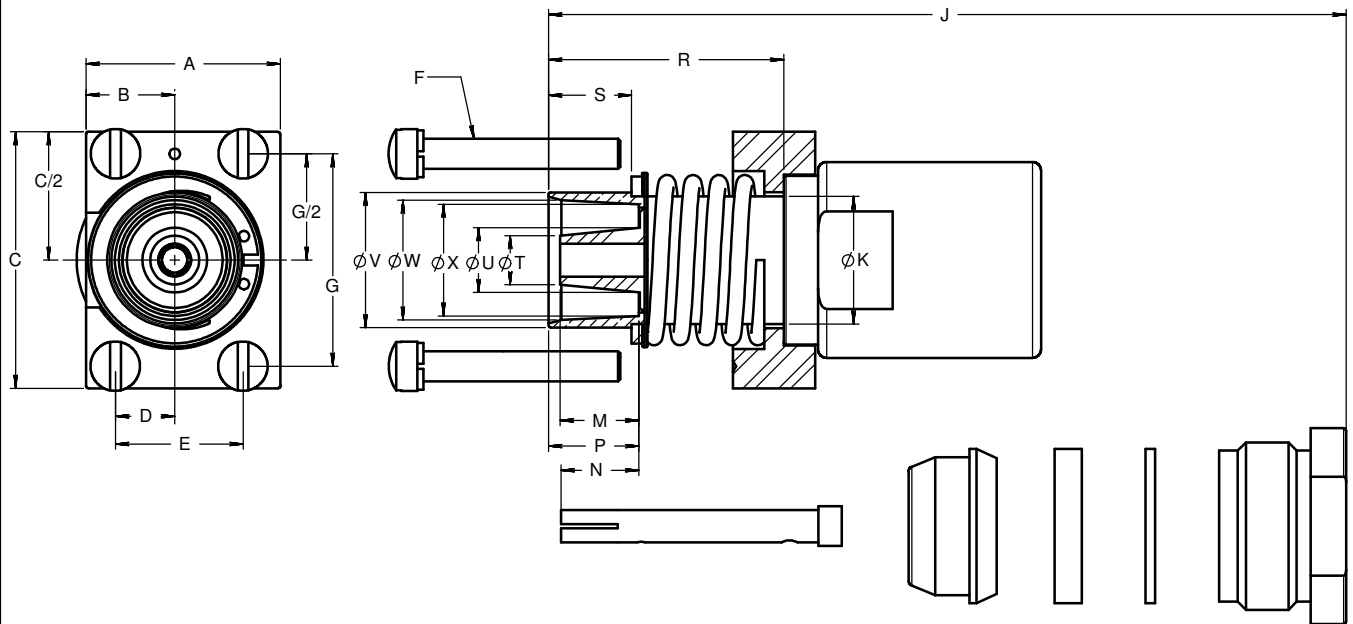


TABLE 1

| A | B | C | D | E | F | G | J | ØK | |
|-------------|------------|-------------|-------------|-------------|------------|-------------|-------------|-------------|-------------|
| 18,36(.723) | 8,36(.329) | 24,21(.953) | 5,64(.222) | 12,12(.477) | 4-40 UNC | 20,12(.792) | 55,88(2,20) | 12,12(.477) | |
| 18,23(.718) | 8,28(.326) | 24,10(.949) | 5,51(.217) | 11,89(.468) | | 19,89(.783) | MAX | 12,00(.472) | |
| M | N | P | R | S | ØT | ØU | ØV | ØW | ØX |
| 7,49(.295) | 7,44(.293) | 8,53(.336) | 22,10(.870) | 7,87(.310) | 4,80(.189) | 6,20(.244) | 12,75(.502) | 11,33(.446) | 10,54(.415) |
| MAX | MAX | 8,43(.332) | DATUM | 7,77(.306) | MAX | MAX | 12,65(.498) | 11,18(.440) | 10,44(.411) |

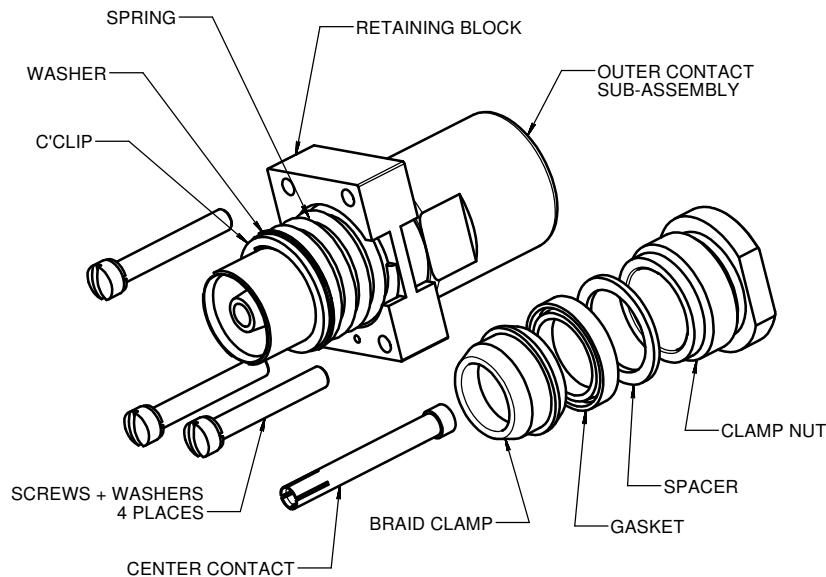


MATERIAL AND FINISH:

- OUTER BODY, BRAID CLAMP, SPACER, AND CLAMP NUT:
BRASS PER ASTM B 16 OR ASTM B 453 OR EN12164
GOLD PLATE PER AMS 2422 OVER NICKEL PER QQ N 290
- CENTER CONTACT:
BERYLLIUM COPPER PER ASTM B 196
GOLD PLATE PER AMS 2422 OVER NICKEL PER QQ N 290
- INSULATOR:
PTFE PER ASTM D 1710 OR EQUIVALENT
- GASKET SEAL:
FLUOROSILICONE PER SAE AMS R 25988
- RETAINING BLOCK:
ALUMINUM ALLOY PER AMS QQ A 591
BLACK ANODIC OXYDATION
- SCREWS, WASHERS, C'CLIP AND SPRING:
STAINLESS STEEL
PASSIVATED

WIRING INSTRUCTIONS: SEE RP7961

DIMENSIONS : mm (inch are given for information only)



CREATION

PEN:

NOM: MACARI

DATE: 22 APRIL 93

APPR.:

| | | | | |
|-----------|-----------|--------|----------|--|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| 23 APR.07 | REDRAWN | MACARI | / | |
| Issue | Revisions | Name | Approved | |

620101001EN

RADIALL PROPRIETARY INFORMATION

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311