


Series  
NSX

SIZE 1 COAXIAL SOCKET CONTACT  
FOR CABLE NGC875BAR-1


Issue:  
Dec. 08, 2015

Page  
1/1

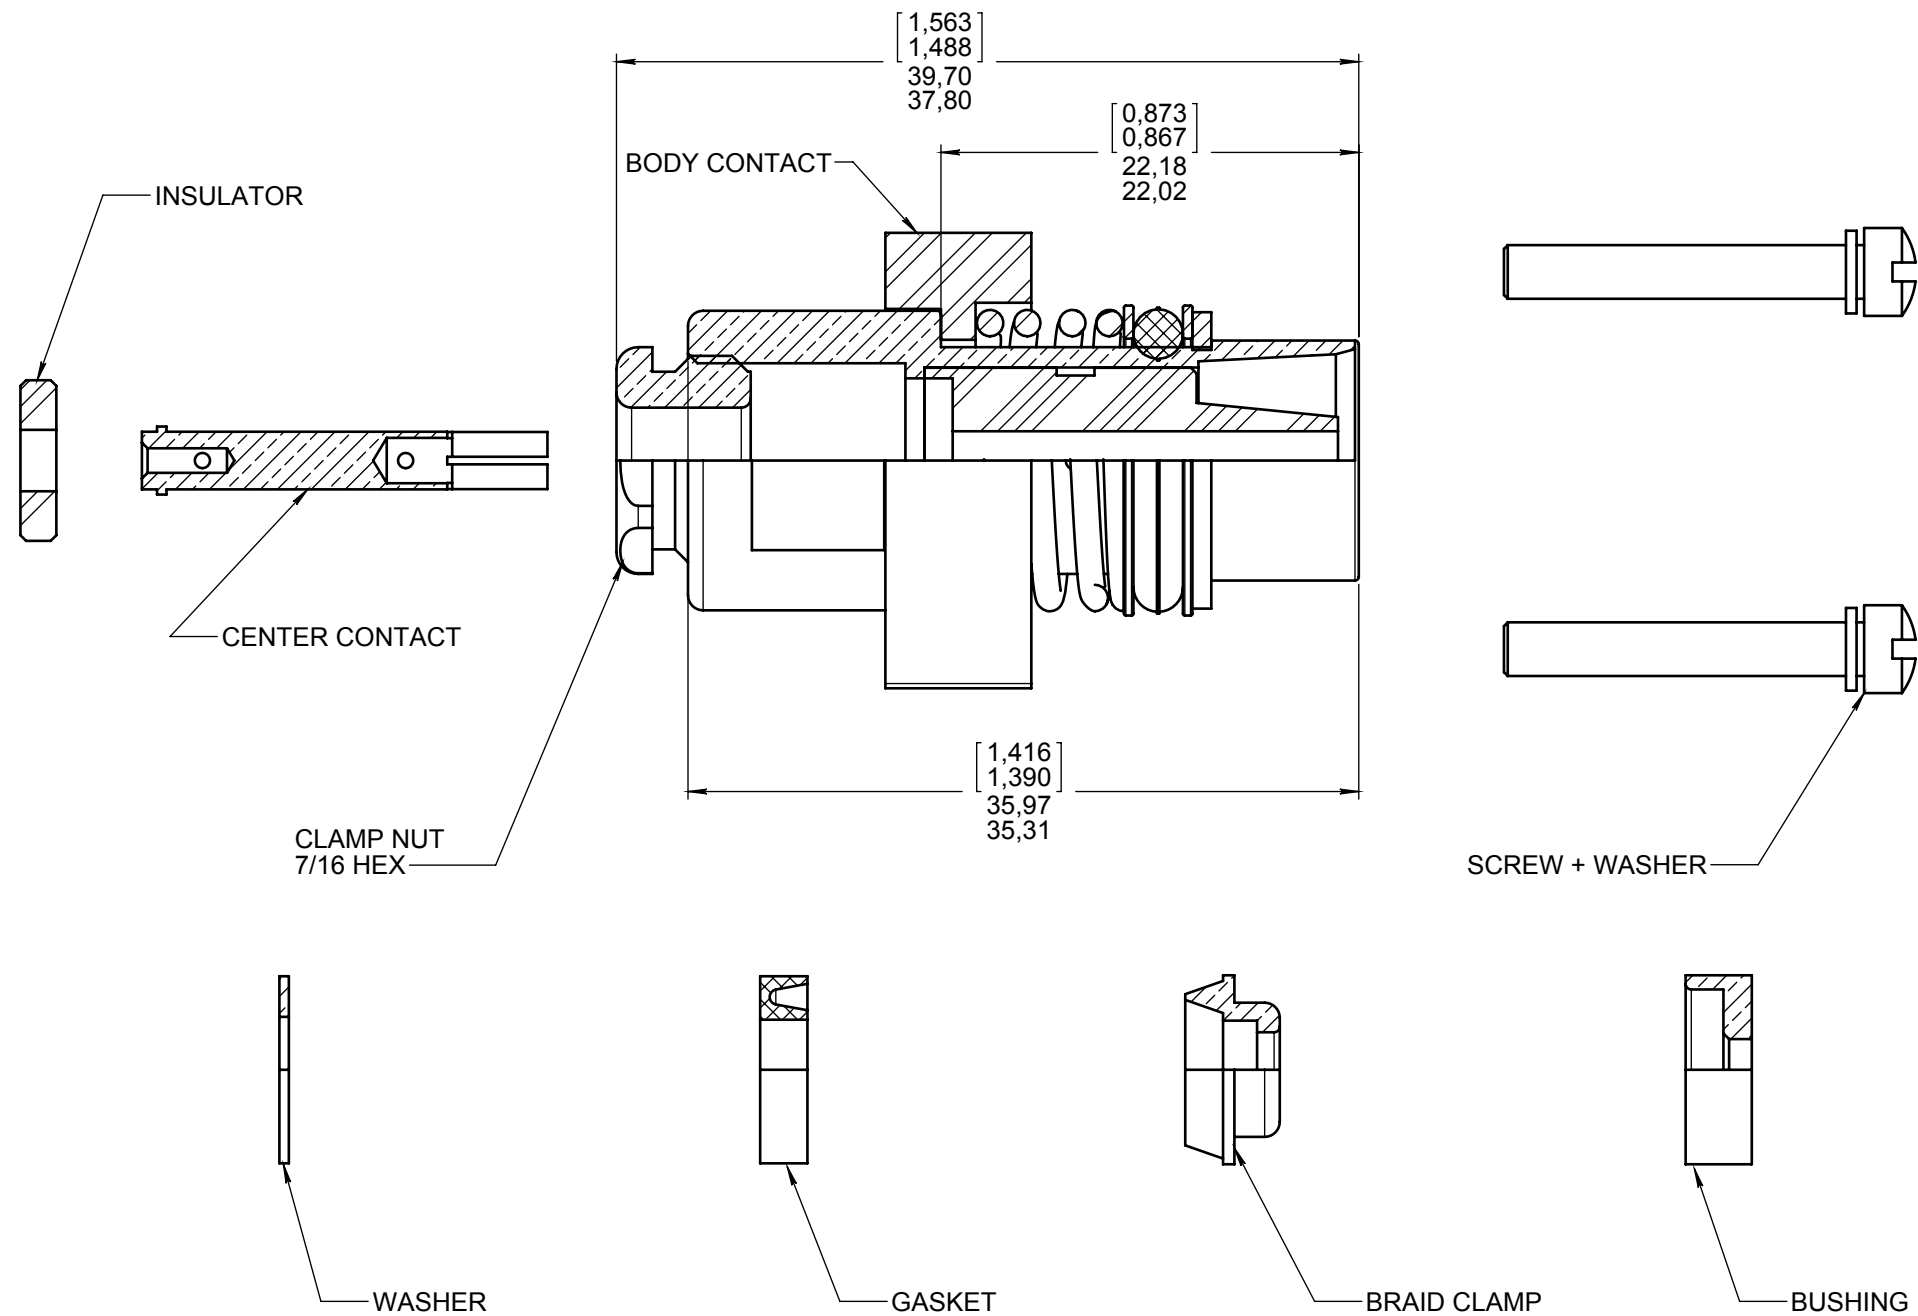

- MATERIAL :
- OUTER CONTACT, CLAMP NUT, WASHER, BUSHING AND BRAID CLAMP : BRASS PER ASTM B 16 OR ASTM B 453 OR EN 12164
  - CENTER CONTACT : BERYLLIUM COPPER PER ASTM B 196
  - INSULATOR : PTFE PER ASTM D 1710 OR EQUIVALENT
  - RETAINING BLOCK : ALUMINUM ALLOY PER SAE AMS-QQ-A-250
  - SPRING, FLAT WASHERS, C'CLIP AND SCREWS : CORROSION RESISTANT MATERIAL
  - O'RING AND GASKET : FLUOROSILICONE PER SAE AMS-R-25988
- FINISH :
- ALL METALIC PARTS : PLATING .00005 INCH OF GOLD PER MIL-DTL-45204 OVER NICKEL PER AMS 2403
  - RETAINING BLOCK : BLACK ANODIZED PER MIL-A-8625
- WIRING INSTRUCTION :
- SEE WIRING INSTRUCTION : MI CT 01 00031

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 42 g

4112_9311	CREATION			
	PEN: 20141287-20A			
	NOM: RAMOS D.			
	DATE: April 25, 2014			
	APPR.: DUPUIS V.			
	Dec. 08, 15	Dimensions added	Zuniga F.	Ramos D.
	Issue	Revisions	Name	Approved