


Series
NSX

T-CAS SIZE 1 COAXIAL SOCKET CONTACT CRIMP TERMINATION FOR
BMS 13-65-OJ CABLE

Issue:
Mar. 13, 2017

Page
1/1

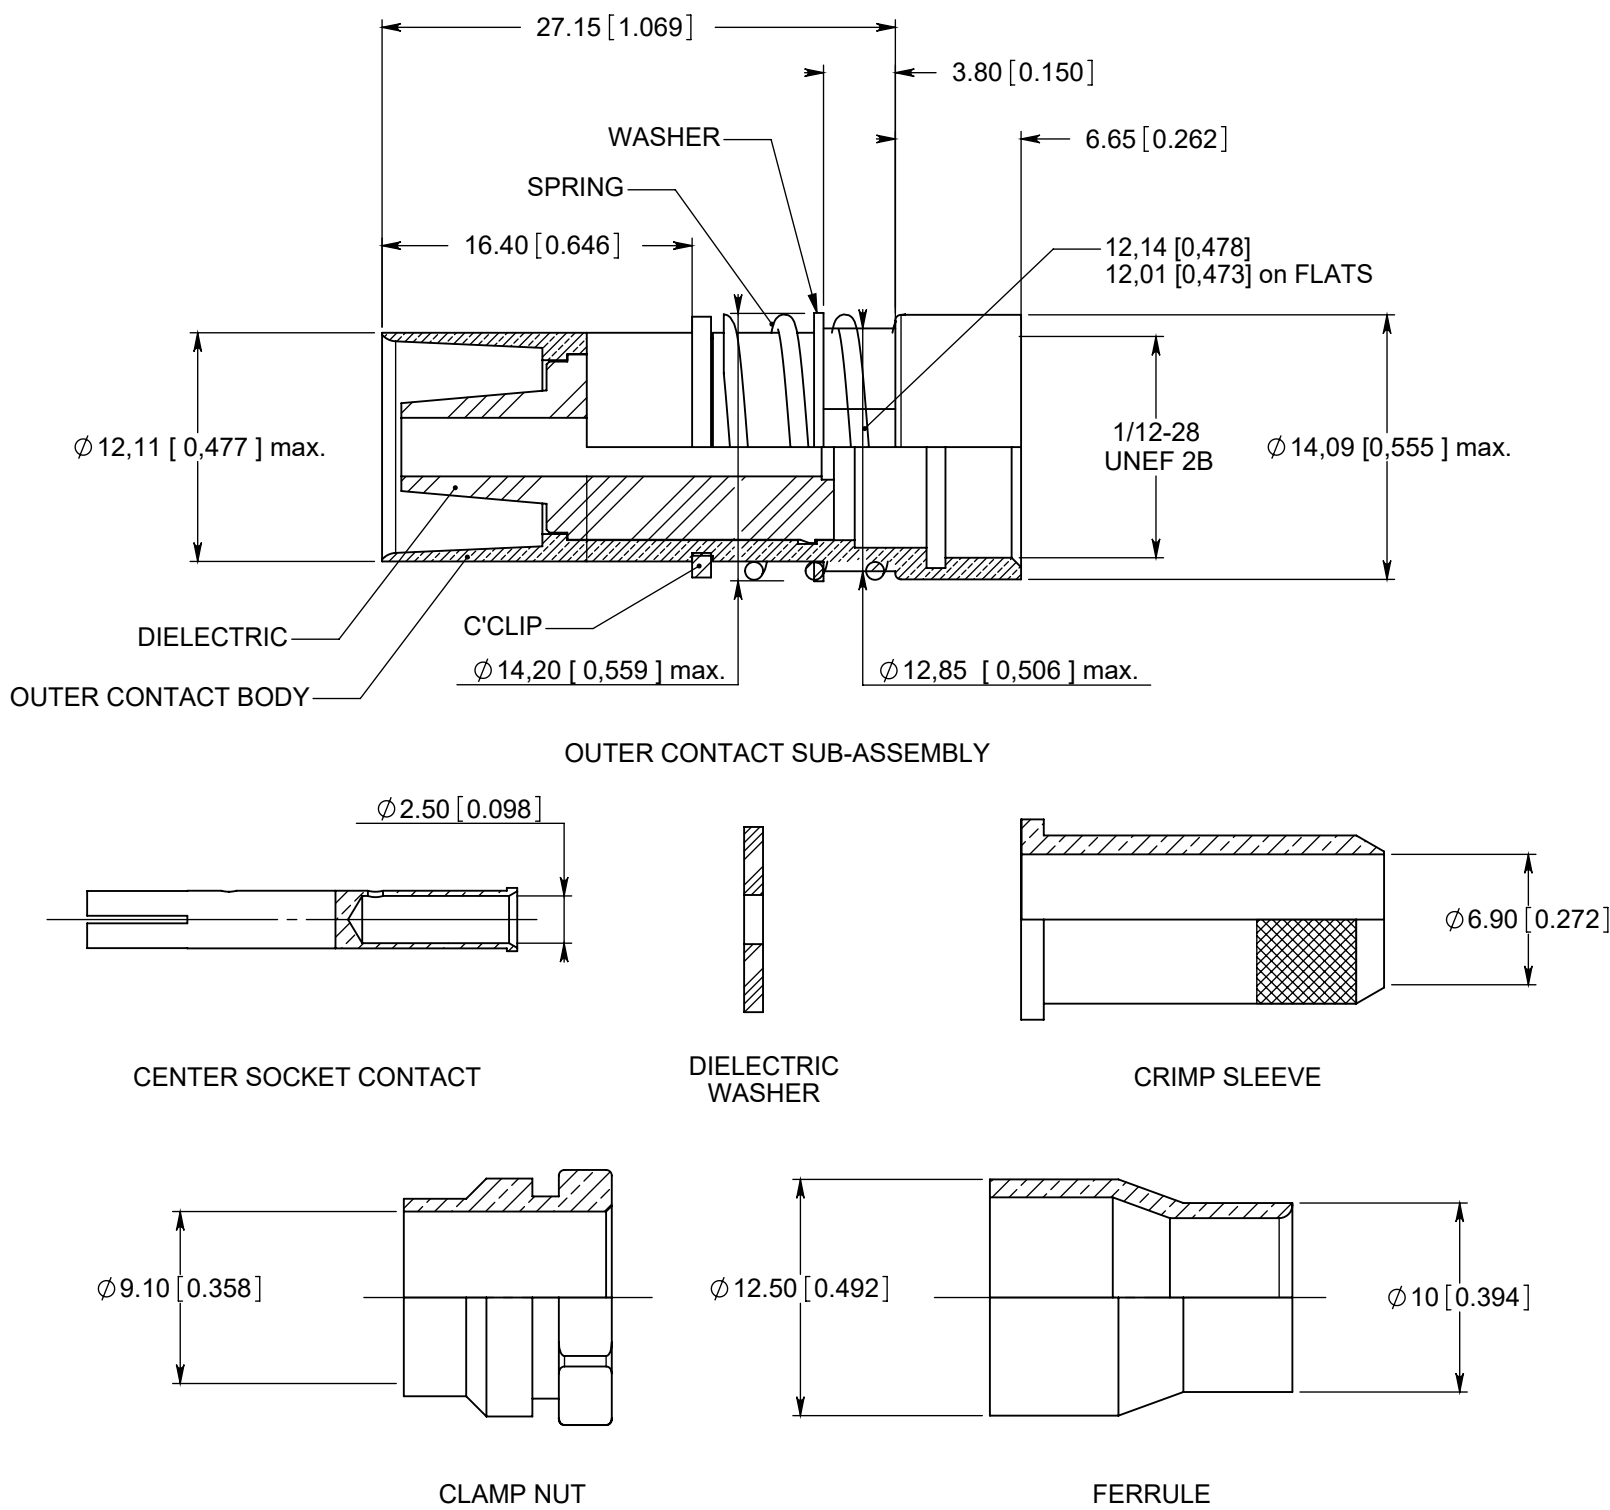

WIRING INSTRUCTIONS: SEA DRAWING RP6176


MATERIAL:

- OUTER CONTACT BODY AND CENTER CONTACT: BERYLLIUM COPPER PER ASTM-B-196
- DIELECTRIC AND DIELECTRIC WASHER: PTFE PER ASTM-D-1710 OR EQUIVALENT
- CRIMP SLEEVE: BRASS PER ASTM-B-16 / B-16M
- FERRULE: BRASS PER ASTM B 453/B453 M
- CLAMP NUT: COPPER ALLOY
- SPRING, C'CLIP AND WASHER: STAINLESS STEEL PER SAE-AMS 5688

FINISH:

- OUTER CONTACT BODY, CRIMP SLEEVE, CENTER CONTACT, CLAMP NUT AND FERRULE: PLATING .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II GRADE C OR D CLASS 1 OVER NICKEL QQ-N-290
- WASHER: PASSIVATED
- C'CLIP: NICKEL PROTECTED

DIMENSIONS : mm (inch are given for information only)



CREATION				
PEN: 2009-08-3826				
NOM: MACARI				
DATE: Sept. 02, 2009	Mar. 13, 2017	Updated flat dimension per ARINC 600	Pécault B.	Legendre T.
APPR.: LEGENDRE	Dec. 18, 2012	Crimp sleeve inner diameter was (.254).	Perrin H.	Dupuis V.
	Issue	Revisions	Name	Approved

620117101EN

RADIAL PROPRIETARY INFORMATION

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.