
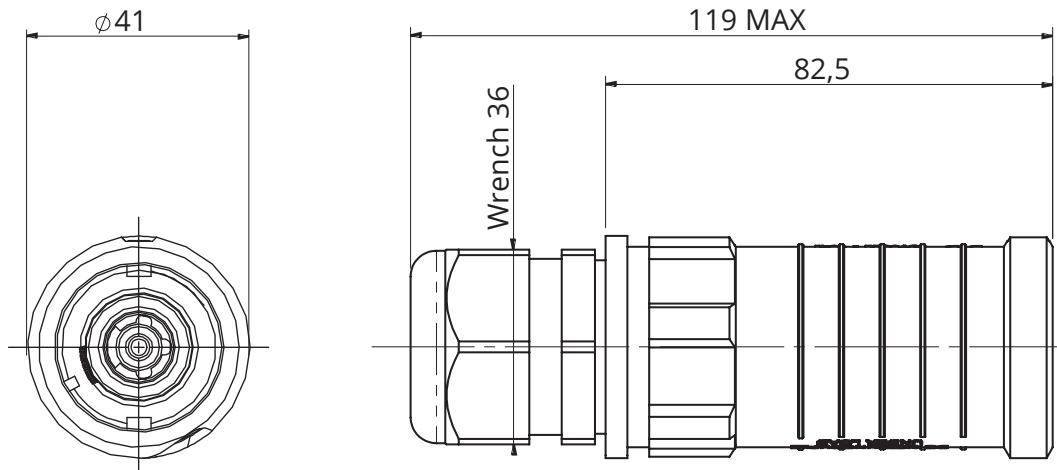


PAGE 1/2

ISSUE 01-07-21B


SERIES SPPC

PART NUMBER SPPC-HK-LS-N-BU-S-70-M

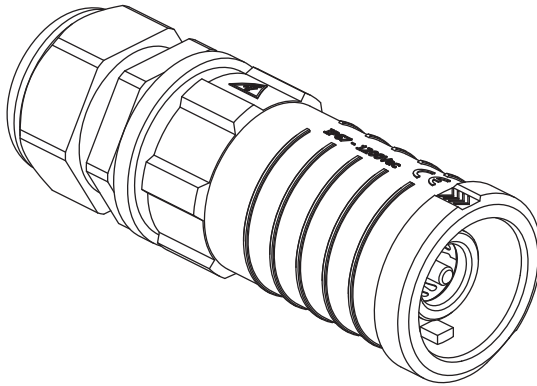

*Dimensions in mm*

#### Code details

Series Code	SPPC-HK	Single Pole Power Connectors
Connector Type	LS	Cable/Line Source
Key Position	N	Neutral
Insulator Color	BU 	Blue
Contact Termination	S-70	Screw terminal – 250A up to 70mm <sup>2</sup>
Cable External diameter	M	11mm – 21mm
Contacts Type	-	Standard contacts
Customization	-	-

**Connector Type:**

Number of contacts: Single Pole  
Cable/line Source connectors  
Blue Color  
Locking: Spring into the Locked Position  
Screw terminal contacts for wire up to 70mm<sup>2</sup>  
Finger Touch protected contacts IP2X

### Reference Documents:

- EN 61984
- EN 60529
- European Directive 2011/65/UE (RoHS)

### General features:

Operating temperatures: -30°C ÷ +120°C  
Protection degree (mated connectors; according to EN 60529): IP67  
Flammability: UL94-V0  
Minimum Mating Cycles: 500

### Electrical specifications:

Nominal Voltage: 1200 Vac / Vdc  
Current Rating: 250A  
Contact Resistance: <0.1 mΩ  
Rated Voltage to Earth: 1750Vac, panel thickness<4mm  
1200Vac, panel thickness>4mm  
Short Circuit Current – 1 second: 11kA  
Short Circuit Current – 3 seconds: 4kA  
Surge Current (DIN VDE 0102/1.90): 45kA – 10 mseconds

**Others characteristics:**

Screws Tightening Torque (in-line connectors): 12Nm  
Contact Retention in Insulator: 400N axial load  
Sleeves included, for cable conductor size - 16 mm<sup>2</sup> - 25 mm<sup>2</sup> - 35 mm<sup>2</sup> - 50 mm<sup>2</sup> - 70 mm<sup>2</sup>

COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
Shells	Thermoplastic	-	P/N	Description	Quantity
Contacts	Copper Alloy	Silver Plated	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-	-	-	-

## PACKAGING

Quantity	Type	Weight
1	Plastic Bags	0.22Kg
-	Carton Box	-