
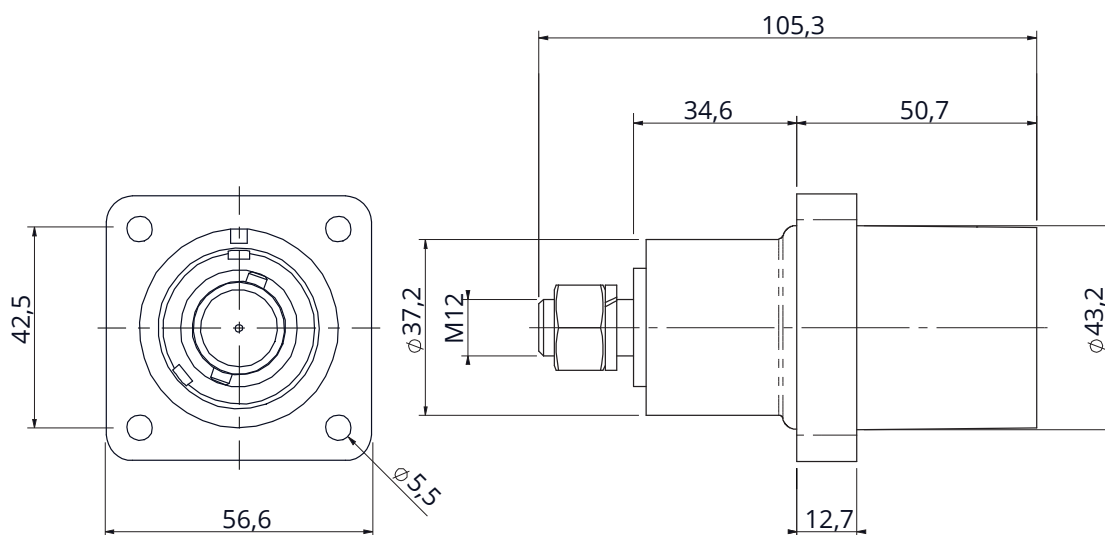


PAGE 1/2

ISSUE 22-07-19A


SERIES SPPC

PART NUMBER **SPPC-PWL-PS-N-BU-M12-T4**

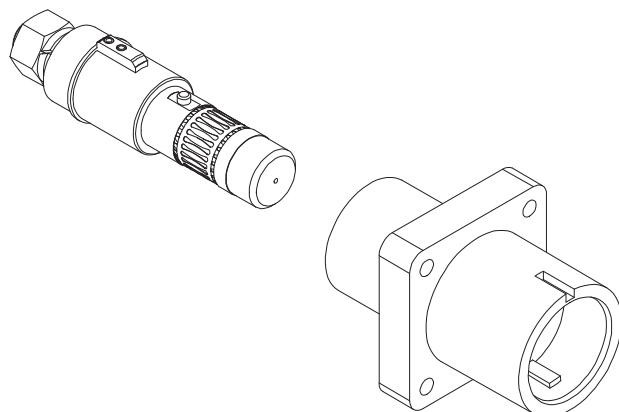

*Dimensions in mm*

### Code details

Series Code	<b>SPPC-PWL</b>	Single Pole Power connectors
Connector Type	<b>PS</b>	Panel Source
Key Position	<b>N</b>	Neutral
Insulator Color	<b>BU</b> 	Blue
Contact Termination	<b>M12-T4</b>	M12 Threaded post - 400A
Cable External diameter	-	-
Contacts Type	-	Standard contacts
Customization	-	-

PAGE 2/2

ISSUE 22-07-19A

SERIES SPPC

PART NUMBER SPPC-PWL-PS-N-BU-M12-T4

#### Connector Type:

Number of contacts: Single Pole  
Panel Source connectors  
Blue Color  
Locking: Bayonet with secondary locking pin  
M12 Threaded post contacts  
Finger Touch protected contacts IP2X

#### Reference Documents:

- EN 61984
- EN 60529
- European Directive 2011/65/UE (RoHS)
- UL94

#### General features:

Operating temperatures: -30°C ÷ +125°C  
Protection degree (mated connectors; according to EN 60529): IP66/67  
Flammability: UL94-V0  
Minimum Mating Cycles: 500

#### Electrical specifications:

Nominal Voltage: 1000 Vac / 1500 Vdc  
Current Rating: 400A  
Minimum Insulation Resistance: 5GΩ @ 500V  
Contact Resistance: <0.1 mΩ  
Rated Voltage to Earth: 2000Vac  
Minimum Flashover (EN60309-1): 6.8kV AC – 1 minute  
Test Voltage (Mated Condition): 5 kV– 1 minute @ 50Hz  
Short Circuit Current – 1 second: 16kA  
Short Circuit Current – 3 seconds: 12kA  
Surge Current (DIN VDE 0102/1.90): 62kA – 10mseconds  
Creepage Distance: >25mm  
Clearance Distance: >25mm

#### Others characteristics:

Panel Contact Tightening Torque: 30Nm max  
Contact Retention in Insulator: 2.5kN Axial Load

UL certified (File n° E483437)



COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
Shells	Thermoplastic	-	P/N	Description	Quantity
Contacts	Copper Alloy	Silver Plated	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-	-	-	-

#### PACKAGING

Quantity	Type	Weight
1	Plastic Bags	-
-	Carton Box	-



Radiall VanSystem S.r.l. | [www.vansystem.eu](http://www.vansystem.eu) - [www.radiall.com](http://www.radiall.com)