
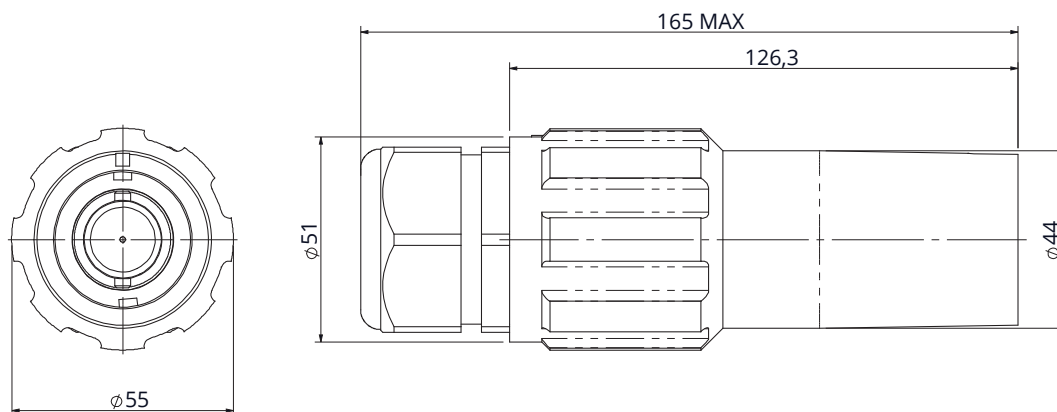


PAGE 1/2

ISSUE 30-07-19A


SERIES SPPC

PART NUMBER SPPC-PWL-LS-L1-BR-S-120-M

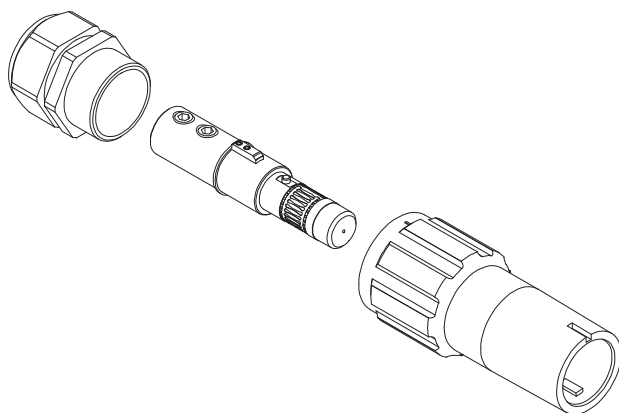

*Dimensions in mm*

#### Code details

<b>Series Code</b>	<b>SPPC-PWL</b>	Single Pole Power connectors
<b>Connector Type</b>	<b>LS</b>	Cable/Line Source
<b>Key Position</b>	<b>L1</b>	Phase 1
<b>Insulator Color</b>	<b>BR</b> 	Brown
<b>Contact Termination</b>	<b>S-120</b>	Screw terminal – 400A up to 120mm <sup>2</sup>
<b>Cable External diameter</b>	<b>M</b>	19mm – 28mm
<b>Contacts Type</b>	-	Standard contacts
<b>Customization</b>	-	-

PAGE 2/2

ISSUE 30-07-19A

SERIES SPPC

PART NUMBER SPPC-PWL-LS-L1-BR-S-120-M

**Connector Type:**

Number of contacts: Single Pole  
 Cable/line Source connectors  
 Brown Color  
 Locking: Bayonet with secondary locking pin  
 Screw terminal contacts for wire up to 120mm<sup>2</sup>  
 Finger Touch protected contacts IP2X

**Reference Documents:**

- EN 61984  
 - EN 60529  
 - European Directive 2011/65/UE (RoHS)  
 - UL94

**General features:**

Operating temperatures: -30°C ÷ +125°C  
 Protection degree (mated connectors; according to EN 60529): IP66/67  
 Flammability: UL94-V0  
 Minimum Mating Cycles: 500

**Electrical specifications:**

Nominal Voltage: 1000 Vac / 1500 Vdc  
 Current Rating: 400A  
 Minimum Insulation Resistance: 5GΩ @ 500V  
 Contact Resistance: <0.1 mΩ  
 Rated Voltage to Earth: 2000Vac  
 Minimum Flashover (EN60309-1): 6.8kV AC – 1 minute  
 Test Voltage (Mated Condition): 5 kV– 1 minute @ 50Hz  
 Short Circuit Current – 1 second: 16kA  
 Short Circuit Current – 3 seconds: 12kA  
 Surge Current (DIN VDE 0102/1.90): 62kA – 10mseconds

**Others characteristics:**

Screws Tightening Torque (in-line connectors): 12Nm  
 Cable Gland Tightening Torque: 13Nm  
 Contact Retention in Insulator: 2.5kN Axial Load  
 Sleeves included, for cable conductor size 35 mm<sup>2</sup> - 50 mm<sup>2</sup> - 70 mm<sup>2</sup> - 95 mm<sup>2</sup> - 120 mm<sup>2</sup>

UL certified (File n° E483437)



COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
Shells	Thermoplastic	-	P/N	Description	Quantity
Contacts	Copper Alloy	Silver Plated	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-	-	-	-

**PACKAGING**

Quantity	Type	Weight
1	Plastic Bags	-
-	Carton Box	-



Radiall VanSystem S.r.l. | www.vansystem.eu - www.radiall.com