


PAGE 1/2

ISSUE 08-06-23A

SERIES SPPC SB

PART NUMBER SPPC-SB-PS-EU-L-M12-T7-PM

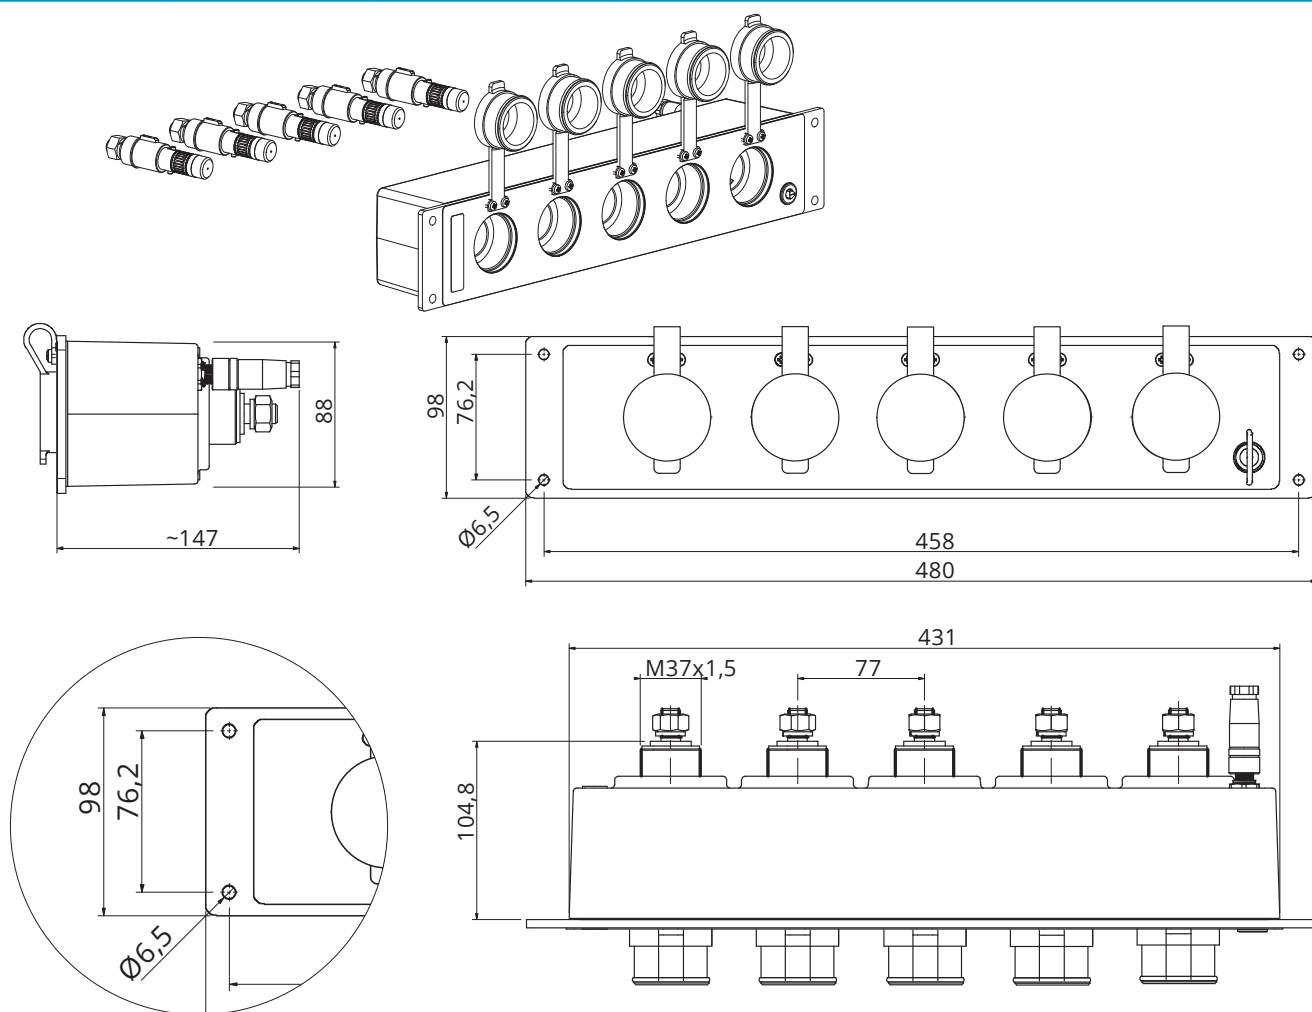

CODE DETAILS

Dimensions in mm

SPPC-SB	Series Code	SPPC-SB	Single Pole Power connectors - Sequential Box
PS	Connector Type	PS	Panel Source
EU	Insulator color	EU	European 5 Connectors (3P+N+E)
L	Caps	L	With rubber caps
M12-T7	Contact Termination	M12-T7	M12 Threaded post – 750A
PM	Mounting Type	PM	Panel mounting

COLOUR CODING

Standard	Earth	Neutral	Phase L1	Phase L2	Phase L3
Europe	Green (GN)	Blue (BU)	Brown (BR)	Black (BK)	Grey (GY)

PAGE 2/2

ISSUE 08-06-23A

SERIES SPPC SB

PART NUMBER SPPC-SB-PS-EU-L-M12-T7-PM

Connector Type:

Sequential Box - Panel Source Connectors - Flanged Version

Number of contacts: Five Poles

European Color Coding

Locking: Bayonet with secondary locking pin

M12 Threaded post Contacts

Finger Touch protected contacts IP2X

Reference Documents:

- EN 61984

- EN 60529

- European Directive 2011/65/UE (RoHS)

- UL94

General features:

Operating temperatures: -30°C ÷ +85°C

Protection degree:

- IP67 (when mated connectors and locked)
- IP65 (when caps are closed)
- IP2X (finger protected)

Minimum Mating Cycles: 500

Electrical specifications:

Nominal Voltage: 1000 V

Current Rating: 750A (can be de-rated according to the type and cross section of the cable)

Contact Resistance: <0.1 mΩ

Short Circuit Current – 1 second: 16kA

Short Circuit Current – 3 seconds: 12kA

Surge Current (DIN VDE 0102/1.90): 62kA – 10mseconds

Microswitch operating voltage: 250Vac / 30Vdc max.

Microswitch current rating: 4A (Resistive Load) / 0,5A (Lamp Load)

M12 - microswitch connections:

Contact position	ON	OFF
1	Common	Common
2	Open	Closed
3	Closed	Open
4	not used	not used

COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
Shells	Aluminum alloy	Anodizing	P/N	Description	Quantity
Contacts	Copper Alloy	Silver Plated 3,5μ min	-	-	-
Gasket	neoprene, nitrile rubber	-	-	-	-
Connectors	Thermoplastic material	-	-	-	-

PACKAGING

Quantity	Type	Weight
1	Carton Box	4.7kg