

PAGE 1/2

ISSUE 22-03-22

SERIE : SPDT

PART NUMBER : R570232010

## RF CHARACTERISTICS

Frequency range : 0 - 3 GHz  
Impedance : 50 Ohms

| Frequency (GHz)    | DC - 1  | 1 - 2   | 2 - 3   |
|--------------------|---------|---------|---------|
| VSWR max           | 1.15    | 1.20    | 1.25    |
| Insertion loss max | 0.15 dB | 0.20 dB | 0.25 dB |
| Isolation min      | 85 dB   | 80 dB   | 75 dB   |
| Average power (*)  | 400 W   | 300 W   | 240 W   |

## ELECTRICAL CHARACTERISTICS

Actuator : LATCHING  
Nominal current \*\* : 320 mA  
Actuator voltage (Vcc) : 12V (10.2 to 13V) / POSITIVE COMMON  
Terminals : solder pins (250°C max. / 30 sec.)

## MECHANICAL CHARACTERISTICS

Connectors : BNC female per MIL-C 39012  
Life : 2.5 million cycles  
Switching Time\*\*\* : < 15 ms  
Construction : Splashproof  
Weight : < 185 g

## ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C  
Storage temperature range : -55°C to +85°C

(\* Average power at 25°C per RF Path)  
(\*\* At 25° C ±10%)  
(\*\*\* Nominal voltage ; 25° C)




PAGE 2/2

ISSUE 22-03-22


SERIE : SPDT

PART NUMBER : R570232010

DRAWING

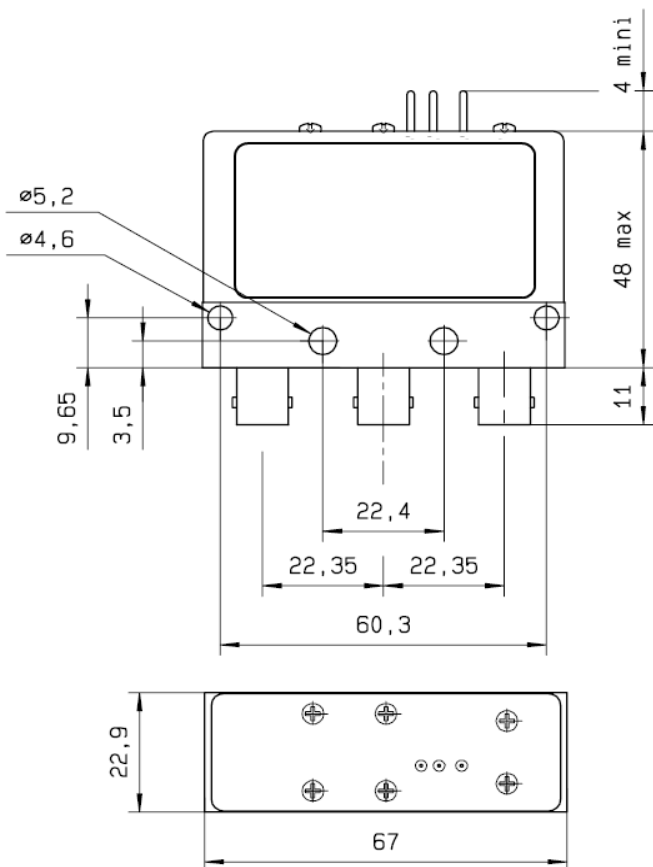


**LABEL**

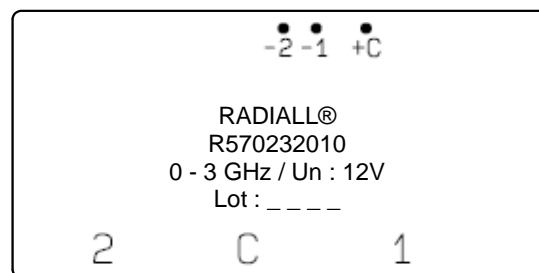

General tolerances :  $\pm 0,5$  mm [0,02 in]

SCHEMATIC DIAGRAM

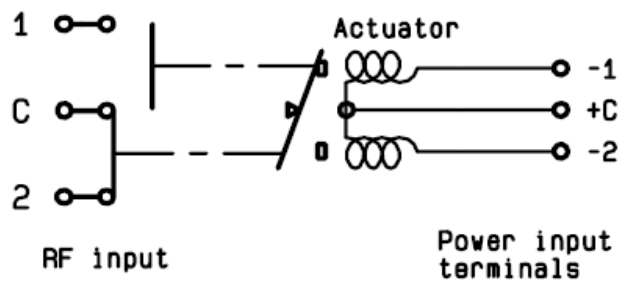

| Voltage | RF Continuity |
|---------|---------------|
| +C -1   | C ↔ 1         |
| +C -2   | C ↔ 2         |