

PAGE 1/2

ISSUE 22-03-22

SERIE : SPDT

PART NUMBER : R570333040

RF CHARACTERISTICS

Frequency range : **0 - 3 GHz**
 Impedance : **50 Ohms**

Frequency (GHz)	DC - 3
VSWR max	1.10
Insertion loss max	0.15 dB
Isolation min	80 dB
Average power (*)	240 W

ELECTRICAL CHARACTERISTICS

Actuator : **LATCHING**
 Nominal current ** : **80 mA**
 Actuator voltage (Vcc) : **28V (24 to 30V) / POSITIVE COMMON**
 Terminals : **solder pins (250°C max. / 30 sec.)**

MECHANICAL CHARACTERISTICS

Connectors : **SMA female per MIL-C 39012**
 Life : **10 million cycles**
 Switching Time*** : **< 10 ms**
 Construction : **Splashproof**
 Weight : **< 45 g**

ENVIRONMENTAL CHARACTERISTICS



Operating temperature range : **-40°C to +85°C**
 Storage temperature range : **-55°C to +85°C**

(* Average power at 25°C per RF Path)
 (** At 25° C ±10%)
 (***) Nominal voltage ; 25° C)




PAGE 2/2	ISSUE 22-03-22	SERIE : SPDT	PART NUMBER : R570333040
-----------------	-----------------------	---------------------	---------------------------------

DRAWING

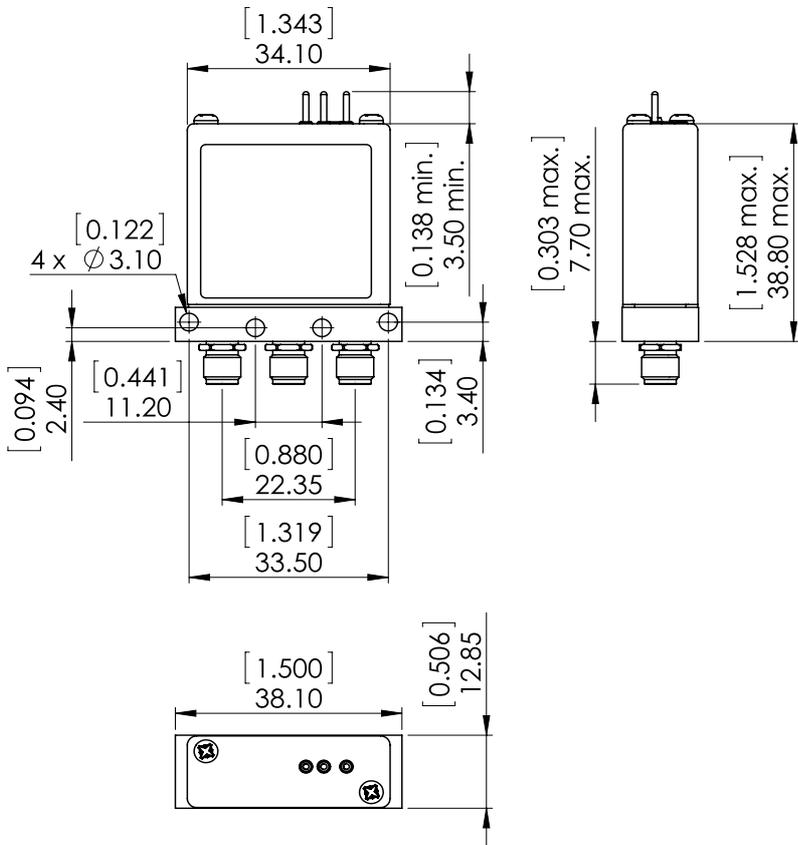

General tolerances : ±0,5 mm [0,02 in]

SCHEMATIC DIAGRAM

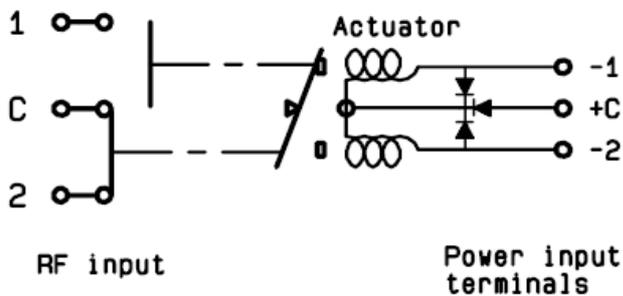

Voltage	RF Continuity
+C -1	C ↔ 1
+C -2	C ↔ 2