

PAGE **1/2**

ISSUE **28-06-16**

SERIE : **SPnT**

PART NUMBER : **R573023200**

## RF CHARACTERISTICS

Number of ways : **12**  
 Frequency range : **0 - 3 GHz**  
 Impedance : **50 Ohms**

Frequency (GHz)	<b>DC - 3</b>
VSWR max	<b>1.35</b>
Insertion loss max	<b>0.50 dB</b>
Isolation min	<b>70 dB</b>
Average power (*)	<b>400 W</b>

## ELECTRICAL CHARACTERISTICS

Actuator : **LATCHING**  
 Nominal current \*\* : **125 mA / RESET : 1500 mA \*\*\*\***  
 Actuator voltage (Vcc) : **28V (24 to 30V) / NEGATIVE COMMON**  
 Terminals : **solder pins (250°C max. / 30 sec.)**

## MECHANICAL CHARACTERISTICS

Connectors : **N female per MIL-C 39012**  
 Life : **2.000.000 cycles per position**  
 Switching Time\*\*\* : **< 15 ms**  
 Construction : **Splashproof**  
 Weight : **< 1100 g**

## ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : **-40°C to +85°C**  
 Storage temperature range : **-55°C to +85°C**

(\* Average power at 25°C per RF Path)

(\*\* At 25° C ±10%)

(\*\*\* Nominal voltage ; 25° C)

(\*\*\*\* Reset : supply voltage time 1sec. max. / duty cycle 10%)




PAGE 2/2

ISSUE 28-06-16

SERIE : SPnT

PART NUMBER : R573023200


DRAWING

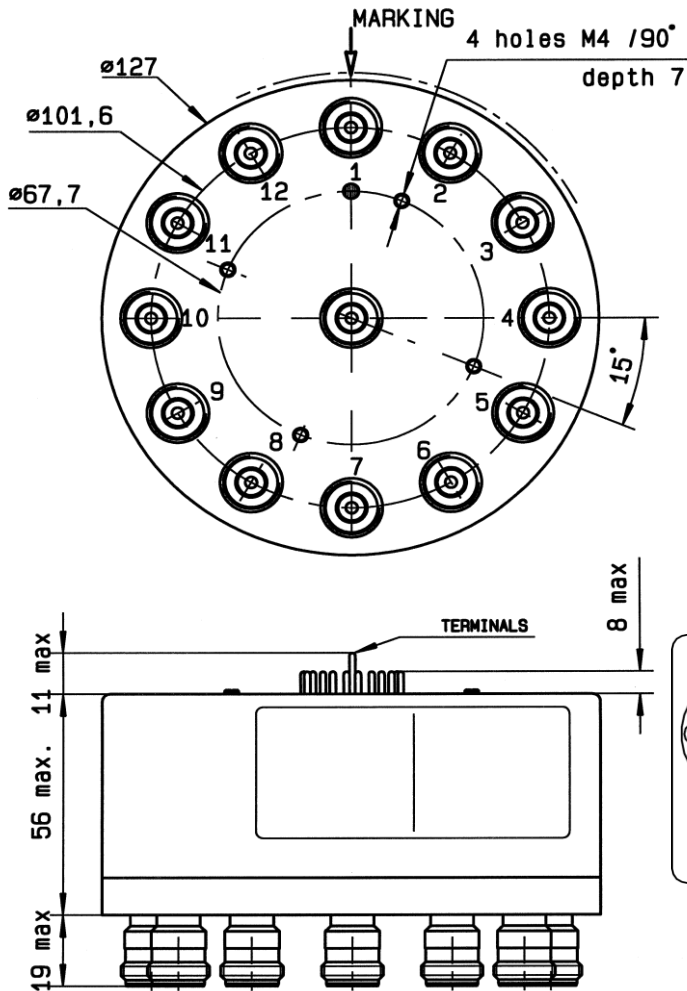

General tolerances :  $\pm 0.5$  mm

Voltage	RF Continuity
-C +RESET	All ports open
-C +1	IN $\leftrightarrow$ 1
-C +2	IN $\leftrightarrow$ 2
-C +3	IN $\leftrightarrow$ 3
-C +4	IN $\leftrightarrow$ 4
-C +5	IN $\leftrightarrow$ 5
-C +6	IN $\leftrightarrow$ 6
-C +7	IN $\leftrightarrow$ 7
-C +8	IN $\leftrightarrow$ 8
-C +9	IN $\leftrightarrow$ 9
-C +10	IN $\leftrightarrow$ 10
-C +11	IN $\leftrightarrow$ 11
-C +12	IN $\leftrightarrow$ 12

LABEL

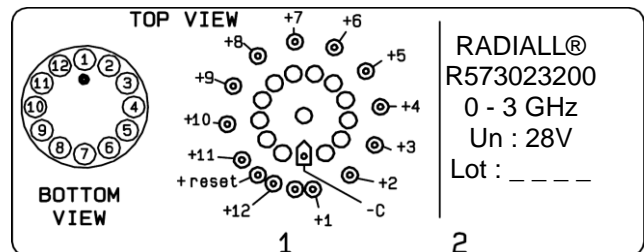

SCHEMATIC DIAGRAM

