

PAGE 1/2

ISSUE 22-03-22

SERIE : SPnT

PART NUMBER : R573032400

## RF CHARACTERISTICS

Number of ways : 4  
Frequency range : 0 - 3 GHz  
Impedance : 50 Ohms

| Frequency (GHz)    | DC - 3  |
|--------------------|---------|
| VSWR max           | 1.20    |
| Insertion loss max | 0.20 dB |
| Isolation min      | 80 dB   |
| Average power (*)  | 400 W   |

## ELECTRICAL CHARACTERISTICS

Actuator : LATCHING  
Nominal current \*\* : 320 mA / RESET : 1280 mA \*\*\*\*  
Actuator voltage (Vcc) : 12V (10.2 to 13V) / NEGATIVE COMMON  
Terminals : solder pins (250°C max. / 30 sec.)  
Indicator rating : 1 W / 30 V / 100 mA

## MECHANICAL CHARACTERISTICS

Connectors : N female per MIL-C 39012  
Life : 2 million cycles per position  
Switching Time\*\*\* : < 15 ms  
Construction : Splashproof  
Weight : < 460 g

## ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C  
Storage temperature range : -55°C to +85°C

- (\* Average power at 25°C per RF Path)  
(\*\* At 25° C ±10%)  
(\*\*\* Nominal voltage ; 25° C)  
(\*\*\*\* Reset : supply voltage time 1sec. max. / duty cycle 10%)




PAGE 2/2

ISSUE 22-03-22

SERIE : SPnT


PART NUMBER : R573032400

DRAWING

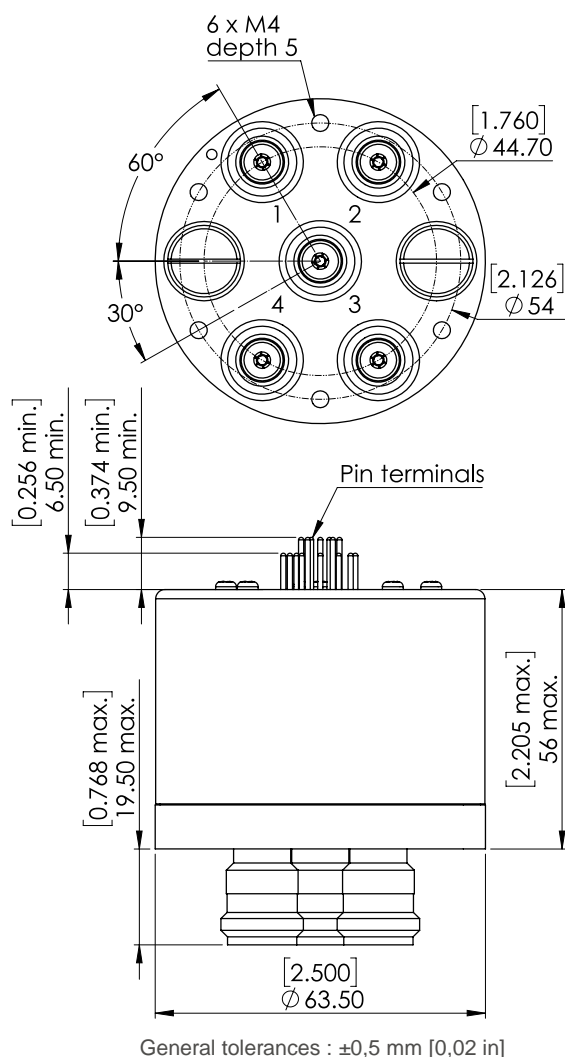

| Voltage   | RF Continuity  | Ind. |
|-----------|----------------|------|
| -C +RESET | All ports open | - -  |
| -C +1     | IN ↔ 1         | D.E  |
| -C +2     | IN ↔ 2         | D.F  |
| -C +3     | IN ↔ 3         | D.G  |
| -C +4     | IN ↔ 4         | D.H  |

**LABEL**

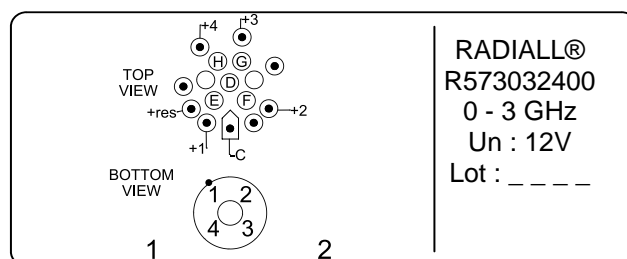

SCHEMATIC DIAGRAM

