

PAGE 1/2

ISSUE 10-07-19

SERIE : SPnT

PART NUMBER : R573102640

## RF CHARACTERISTICS

Number of ways : 6  
Frequency range : 0 - 12.4 GHz  
Impedance : 50 Ohms

| Frequency (GHz)    | DC - 3  | 3 - 8   | 8 - 12.4 |
|--------------------|---------|---------|----------|
| VSWR max           | 1.20    | 1.35    | 1.50     |
| Insertion loss max | 0.20 dB | 0.35 dB | 0.50 dB  |
| Isolation min      | 80 dB   | 70 dB   | 60 dB    |
| Average power (*)  | 400 W   | 250 W   | 200 W    |

## ELECTRICAL CHARACTERISTICS

Actuator : NORMALLY OPEN  
Nominal current \*\* : 250 mA  
Actuator voltage (Vcc) : 12V (10.2 to 13V) / POSITIVE COMMON  
Terminals : solder pins (250°C max. / 30 sec.)

## MECHANICAL CHARACTERISTICS

Connectors : N female per MIL-C 39012  
Life : 2 million cycles per position  
Switching Time\*\*\* : < 15 ms  
Construction : Splashproof  
Weight : < 460 g

## ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C  
Storage temperature range : -55°C to +85°C

(\* Average power at 25°C per RF Path)

(\*\* At 25° C ±10%)

(\*\*\* Nominal voltage ; 25° C)




PAGE 2/2

ISSUE 10-07-19

SERIE : SPnT


PART NUMBER : R573102640

# DRAWING

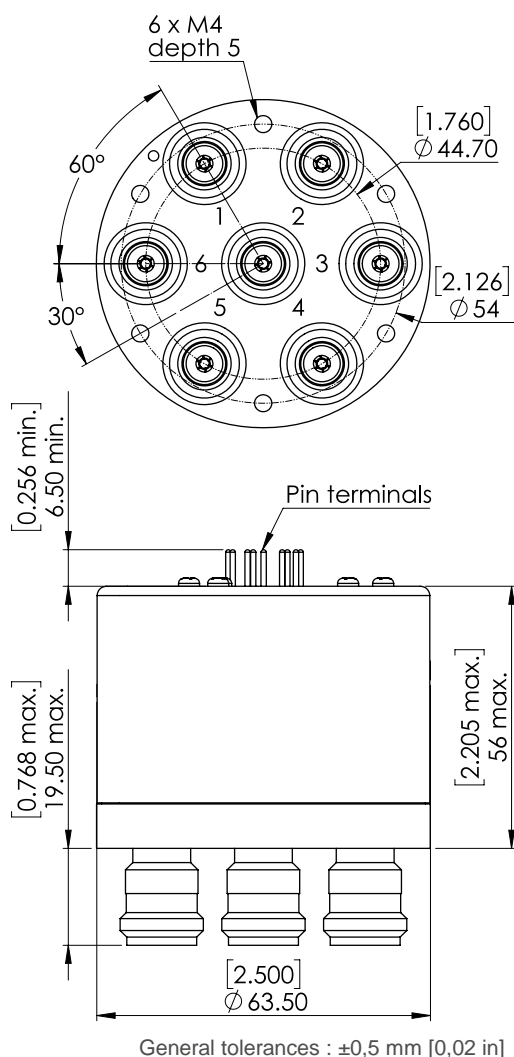

| Voltage | RF Continuity |
|---------|---------------|
| +C -1   | IN ↔ 1        |
| +C -2   | IN ↔ 2        |
| +C -3   | IN ↔ 3        |
| +C -4   | IN ↔ 4        |
| +C -5   | IN ↔ 5        |
| +C -6   | IN ↔ 6        |

# LABEL

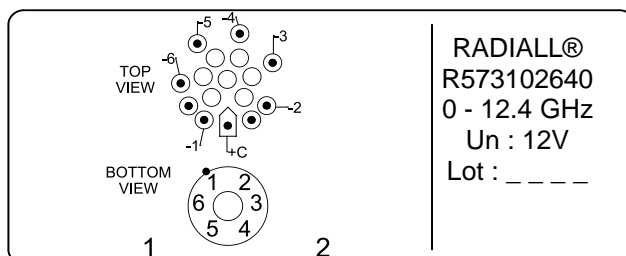

# SCHEMATIC DIAGRAM

