

PAGE 1/2

ISSUE 22-03-22

SERIE : SPnT

PART NUMBER : R573302485

RF CHARACTERISTICS

Number of ways : 4
Frequency range : 0 - 3 GHz
Impedance : 50 Ohms

| Frequency (GHz) | DC - 3 |
|--------------------|---------|
| VSWR max | 1.20 |
| Insertion loss max | 0.20 dB |
| Isolation min | 80 dB |
| Average power (*) | 240 W |

ELECTRICAL CHARACTERISTICS

Actuator : NORMALLY OPEN
Nominal current ** : 250 mA
Actuator voltage (Vcc) : 12V (10.2 to 13V)
Terminals : 25 pins D-SUB male connector
BCD inputs (E) - High level : 3.5 to 5.5 V / 800µA at 5.5 V
- Low level : 0 to 1.5 V / 20µA at 0.8 V

MECHANICAL CHARACTERISTICS

Connectors : SMA female per MIL-C 39012
Life : 5 million cycles per position
Switching Time*** : < 15 ms
Construction : Splashproof
Weight : < 220 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C
Storage temperature range : -55°C to +85°C

(* Average power at 25°C per RF Path)

(** At 25° C ±10%)

(*** Nominal voltage ; 25° C)




PAGE 2/2

ISSUE 22-03-22

SERIE : SPnT


PART NUMBER : R573302485

DRAWING

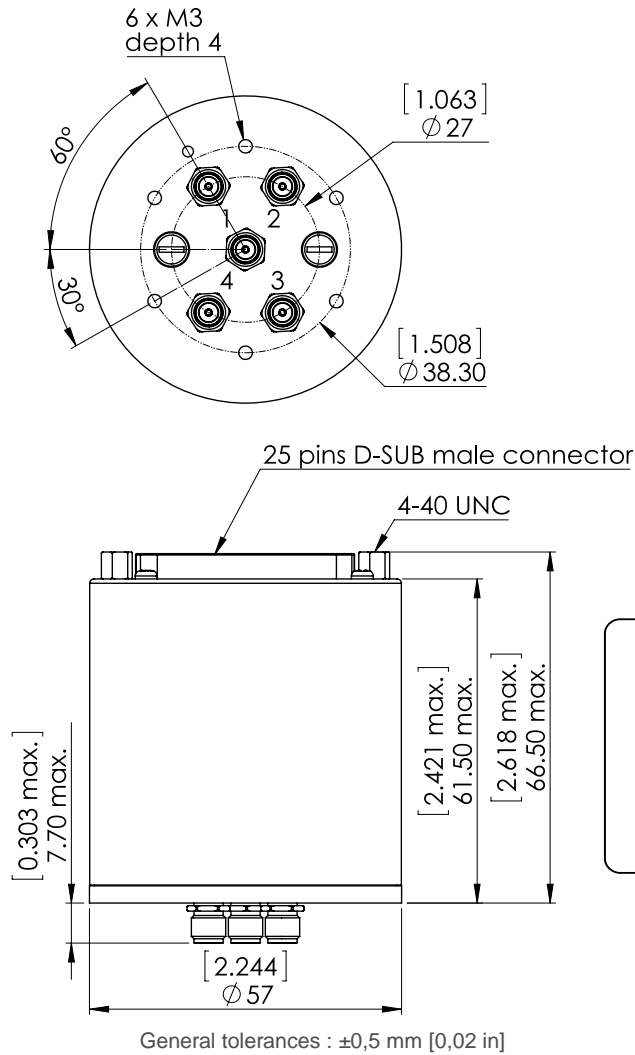

| BCD TRUTH TABLE | | | |
|-----------------|----|----|----------------|
| E3 | E2 | E1 | RF continuity |
| 0 | 0 | 0 | Last Position |
| 1 | 1 | 1 | All ports open |
| 0 | 0 | 1 | IN ↔ 1 |
| 0 | 1 | 0 | IN ↔ 2 |
| 0 | 1 | 1 | IN ↔ 3 |
| 1 | 0 | 0 | IN ↔ 4 |

LABEL

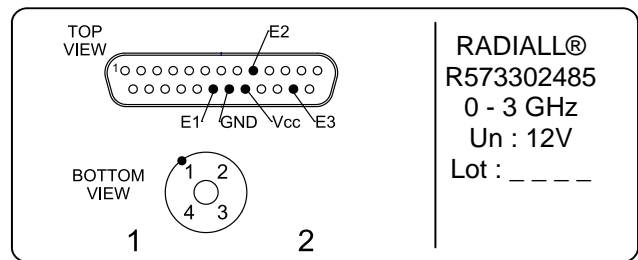

SCHEMATIC DIAGRAM

