

PAGE 1/2

ISSUE 22-03-22

SERIE : SPnT

PART NUMBER : R573303805

## RF CHARACTERISTICS

Number of ways : 8  
Frequency range : 0 - 3 GHz  
Impedance : 50 Ohms

| Frequency (GHz)    | DC - 3  |
|--------------------|---------|
| VSWR max           | 1.20    |
| Insertion loss max | 0.20 dB |
| Isolation min      | 80 dB   |
| Average power (*)  | 240 W   |

## ELECTRICAL CHARACTERISTICS

Actuator : NORMALLY OPEN  
Nominal current \*\* : 102 mA  
Actuator voltage (Vcc) : 28V (24 to 30V) / NEGATIVE COMMON  
Terminals : 25 pins D-SUB male connector

## MECHANICAL CHARACTERISTICS

Connectors : SMA female per MIL-C 39012  
Life : 2 million cycles per position  
Switching Time\*\*\* : < 15 ms  
Construction : Splashproof  
Weight : < 280 g

## ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C  
Storage temperature range : -55°C to +85°C

(\* Average power at 25°C per RF Path)

(\*\* At 25° C ±10%)

(\*\*\* Nominal voltage ; 25° C)




PAGE 2/2

ISSUE 22-03-22

SERIE : SPnT


PART NUMBER : R573303805

DRAWING

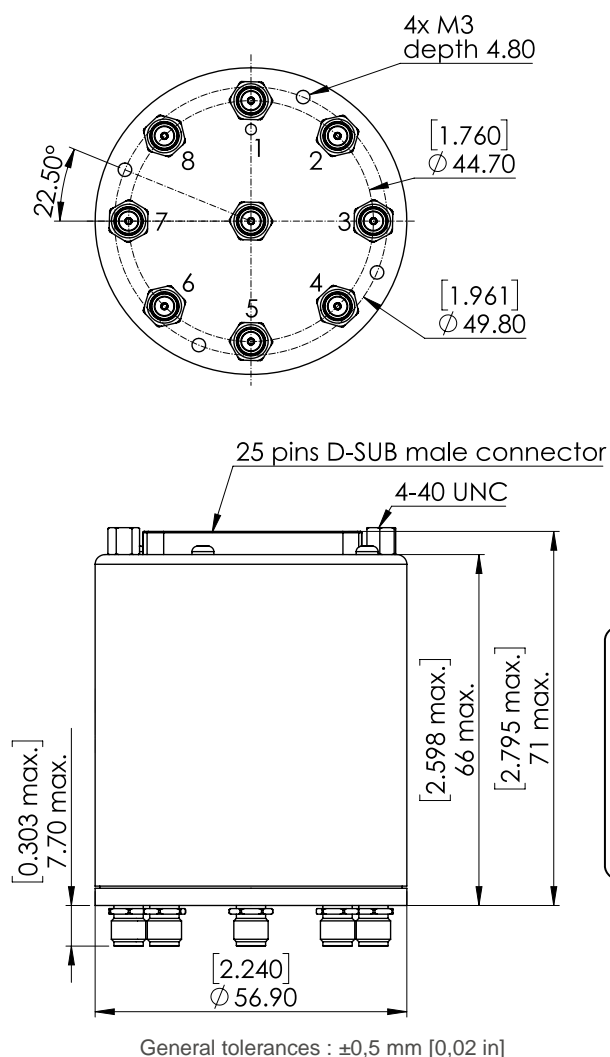

| Voltage | RF Continuity |
|---------|---------------|
| -C +1   | IN ↔ 1        |
| -C +2   | IN ↔ 2        |
| -C +3   | IN ↔ 3        |
| -C +4   | IN ↔ 4        |
| -C +5   | IN ↔ 5        |
| -C +6   | IN ↔ 6        |
| -C +7   | IN ↔ 7        |
| -C +8   | IN ↔ 8        |

**LABEL**

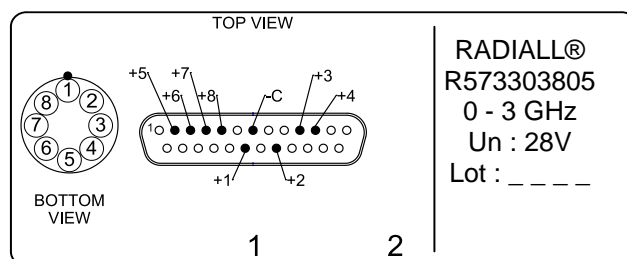

SCHEMATIC DIAGRAM

