

PAGE 1/2

ISSUE 22-03-22

SERIE : SPnT

PART NUMBER : R573393680

RF CHARACTERISTICS

Number of ways : 6
Frequency range : 0 - 3 GHz
Impedance : 50 Ohms

| Frequency (GHz) | DC - 3 |
|--------------------|---------|
| VSWR max | 1.20 |
| Insertion loss max | 0.20 dB |
| Isolation min | 80 dB |
| Average power (*) | 240 W |

ELECTRICAL CHARACTERISTICS

Actuator : LATCHING
Nominal current ** : 375 mA
Actuator voltage (Vcc) : 28V (24 to 30V)
Terminals : solder pins (250°C max. / 30 sec.)
Indicator rating : 1 W / 30 V / 100 mA
Self cut-off time : 40 ms < CT < 120 ms
BCD inputs (E) - High level : 3.5 to 5.5 V / 800µA at 5.5 V
- Low level : 0 to 1.5 V / 20µA at 0.8 V

MECHANICAL CHARACTERISTICS

Connectors : SMA female per MIL-C 39012
Life : 5 million cycles per position
Switching Time*** : < 40 ms
Construction : Splashproof
Weight : < 220 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C
Storage temperature range : -55°C to +85°C

(* Average power at 25°C per RF Path)

(** At 25° C ±10%)

(*** Nominal voltage ; 25° C)




PAGE 2/2

ISSUE 22-03-22

SERIE : SPnT


PART NUMBER : R573393680

DRAWING

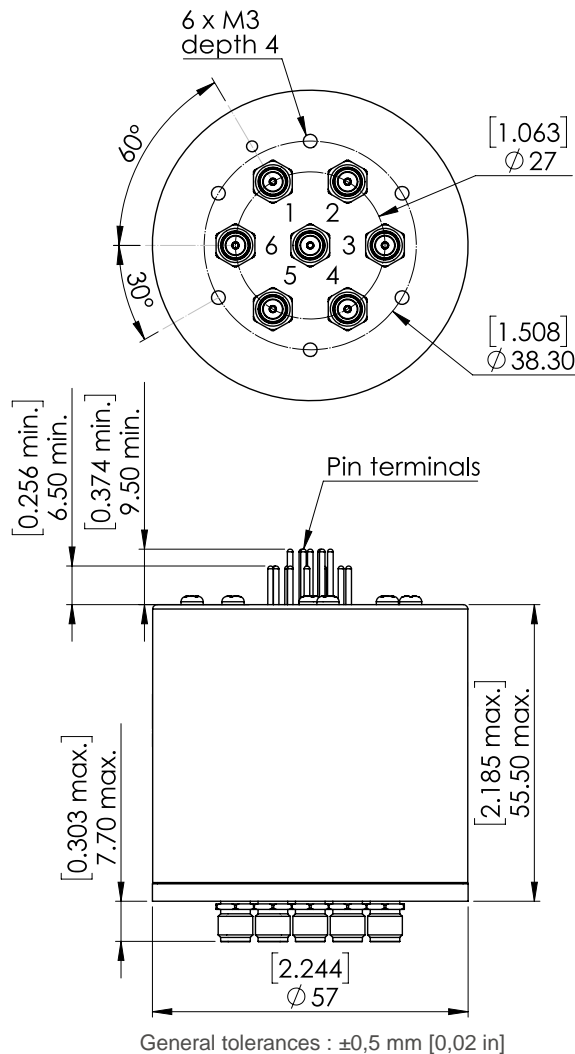

| BCD TRUTH TABLE | | | | |
|-----------------|----|----|-------------------------------|------|
| E3 | E2 | E1 | RF continuity | Ind. |
| 0 | 0 | 0 | All ports open (Forced Reset) | -- |
| 0 | 0 | 1 | IN \leftrightarrow 1 | D.E |
| 0 | 1 | 0 | IN \leftrightarrow 2 | D.F |
| 0 | 1 | 1 | IN \leftrightarrow 3 | D.G |
| 1 | 0 | 0 | IN \leftrightarrow 4 | D.H |
| 1 | 0 | 1 | IN \leftrightarrow 5 | D.I |
| 1 | 1 | 0 | IN \leftrightarrow 6 | D.J |

LABEL

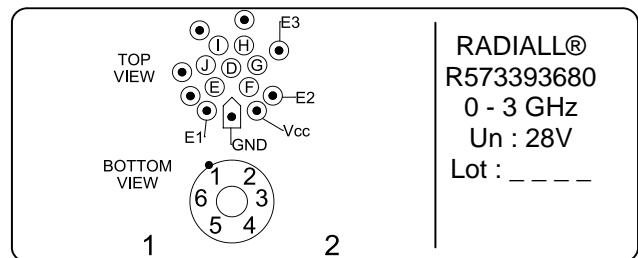

SCHEMATIC DIAGRAM

