


PAGE 1/2

ISSUE 2029A

SERIES SMA-X

PART NUMBER R125462001X

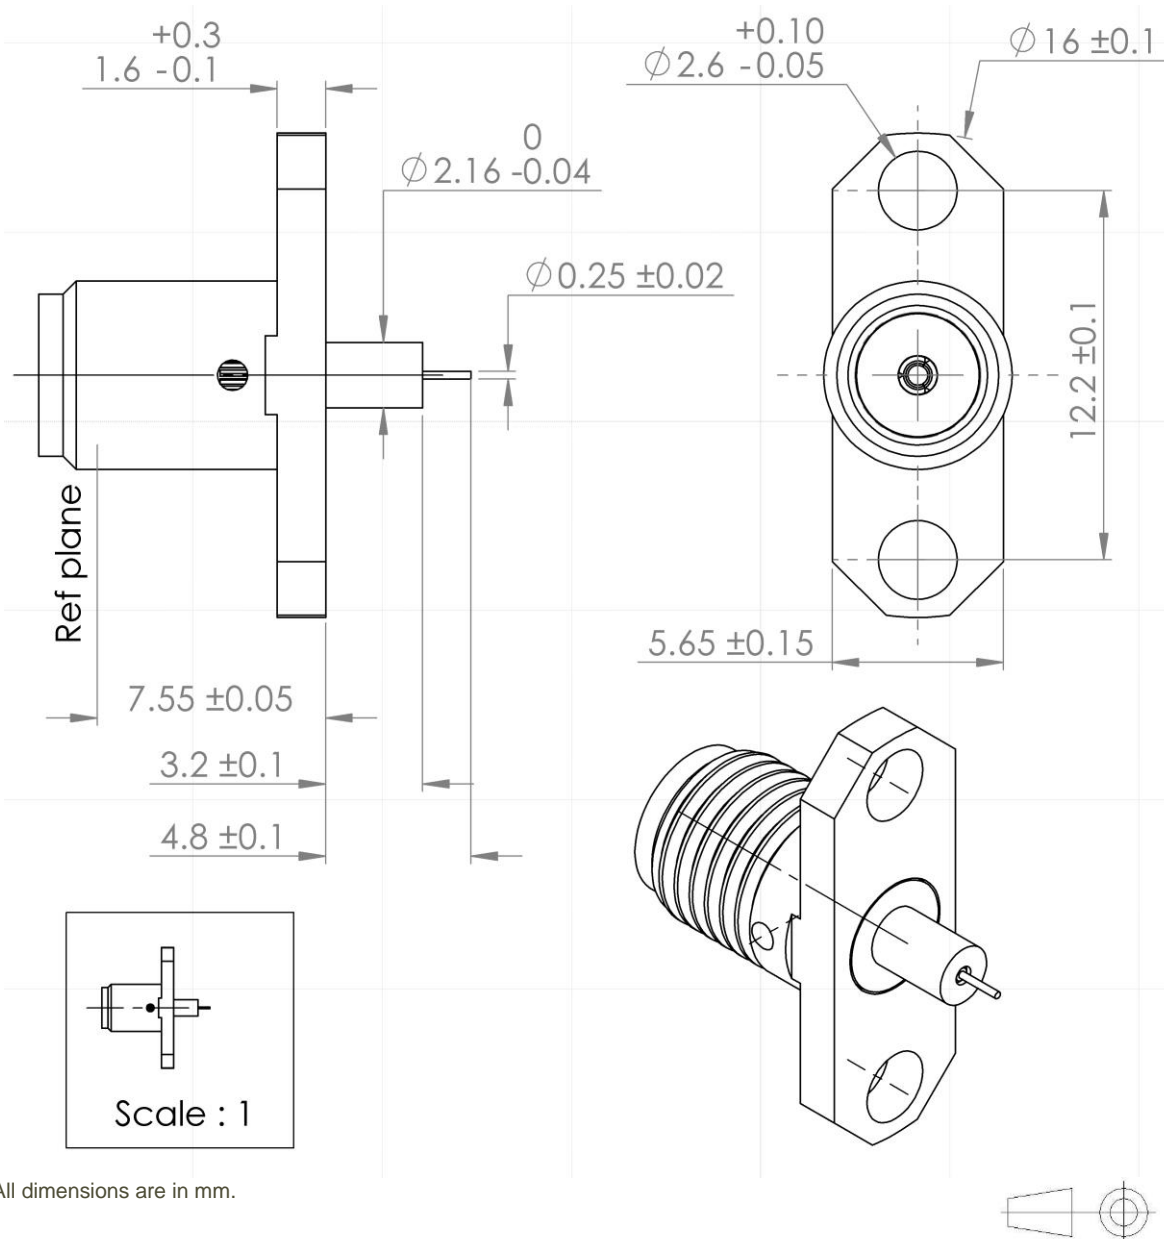

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING (μm)
Body	X8CrNiS18-9 - S30300	PASSIVATED.
Center contact	CuBe2Pb H - C17300	GOLD 1.3 OVER NICKEL2
Outer contact		
Insulator	PTFE	
Gasket		
Others parts		
-	-	-
-	-	-

PAGE 2/2

ISSUE **2029A**

SERIES **SMA-X**

PART NUMBER **R125462001X**

PACKAGING

Standard	Unit	Other
1	-	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-18	GHz
VSWR	1.06 + 0,0020	x F(GHz) Maxi
Insertion loss	0.02+0.07	\sqrt{F} (GHz) dB Maxi
RF leakage	- (95	- F(GHz)) dB Maxi
Voltage rating	500	Vrms Maxi
Dielectric withstanding voltage	1000	Vrms mini
Insulation resistance	5000	M Ω mini

ENVIRONMENTAL

Operating temperature	-65/+105	°C
Hermetic seal		Atm.cm3/s
Panel leakage		

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating End	27	N mini
Axial force – Opposite end	27	N mini
Torque	NA	N.cm mini
Recommended torque		
Mating	80-120	N.cm
Panel nut		N.cm
Mating life	500	Cycles Maxi
Weight	2,3000	g Maxi

SPECIFICATION

RAD-GEN-CONN 001
RAD-DET-CONN 003

OTHER CHARACTERISTICS

Assembly instruction:

Others: