

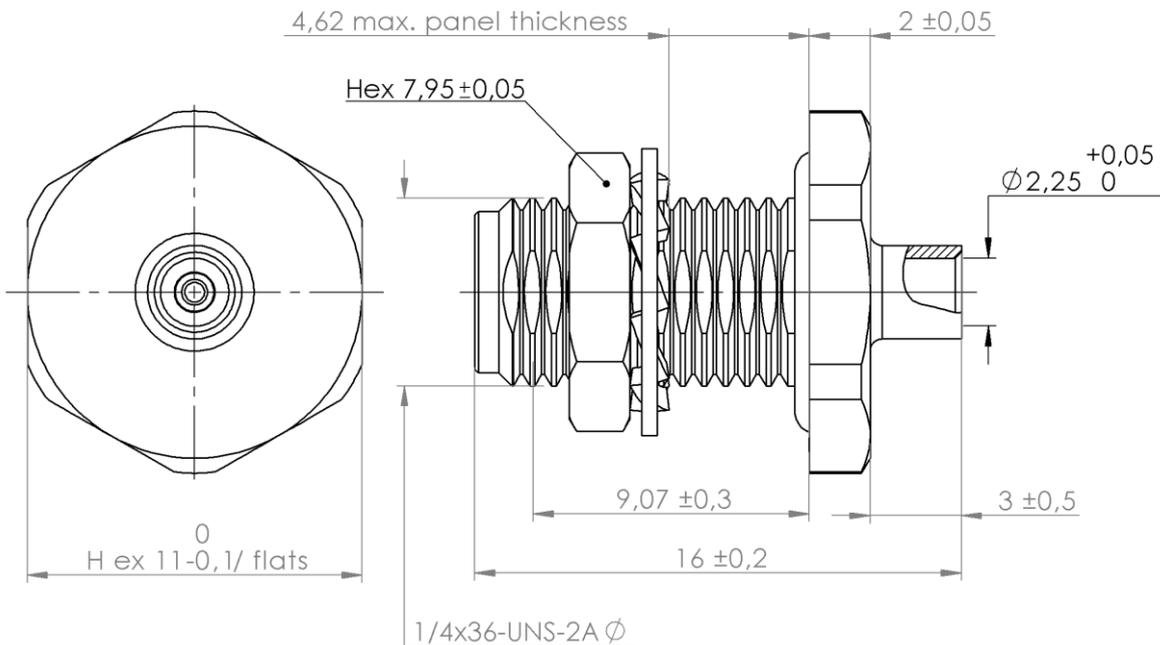



PAGE 1/2	ISSUE 2028A	SERIES SMA-X	PART NUMBER R125326000X
----------	-------------	--------------	-------------------------



Panel cut out



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
Body	X8CrNiS18-9 - S30300	GOLD 0.5 OVER NICKEL 2
Center contact	CuBe2Pb H - C17300	GOLD 1.3 OVER NICKEL2
Outer contact		
Insulator	PTFE	
Gasket	SILICONE 60 SHORE A, RED	
Others parts	BRASS.	GOLD 0.2 OVER NICKEL 2
-	-	-
-	-	-

PAGE 2/2	ISSUE 2028A	SERIES SMA-X	PART NUMBER R125326000X
----------	-------------	--------------	-------------------------

PACKAGING

Standard	Unit	Other
1	-	Contact us

ELECTRICAL CHARACTERISTICS

Impedance		50	Ω
Frequency		0-18	GHz
VSWR	1.07	+	0,0080 x F(GHz) Maxi
Insertion loss		0.02+0.03	√F(GHz) dB Maxi
RF leakage	- (90	- F(GHz)) dB Maxi
Voltage rating		335	Vrms Maxi
Dielectric withstanding voltage		750	Vrms mini
Insulation resistance		5000	MΩ mini

ENVIRONMENTAL

Operating temperature	-65/+165	°C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

Center contact retention			
Axial force – Mating End		NA	N mini
Axial force – Opposite end		NA	N mini
Torque		NA	N.cm mini
Recommended torque			
Mating		NA	N.cm
Panel nut		150	N.cm
Mating life		500	Cycles Maxi
Weight		4,1000	g Maxi

SPECIFICATION

RAD-GEN-CONN 001
RAD-DET-CONN 003

OTHER CHARACTERISTICS

Assembly instruction:

Others: