


PAGE 1/2


ISSUE 2032A

SERIES SMA-S

PART NUMBER R126416061

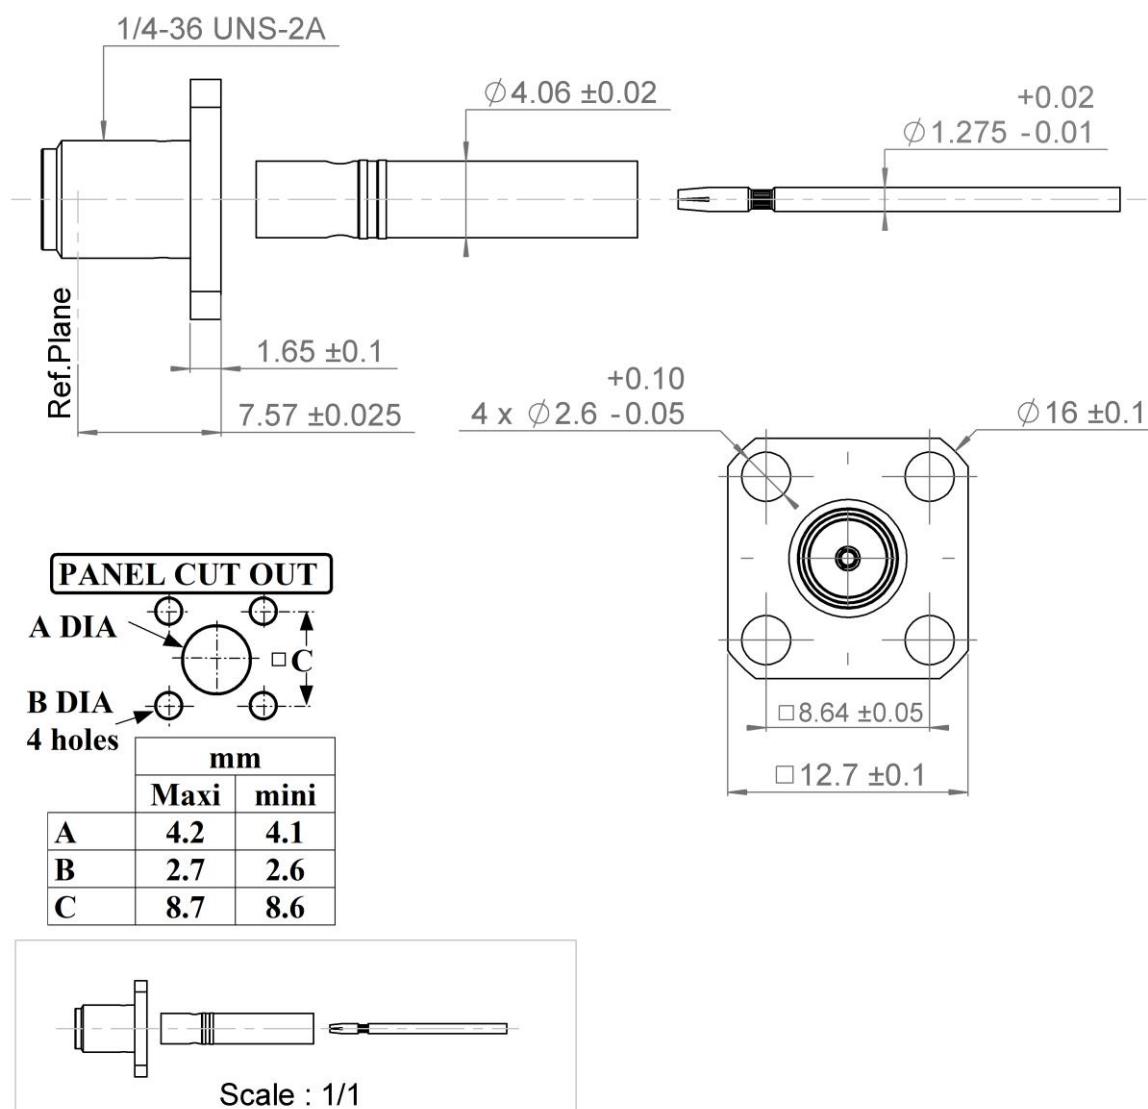

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
Body	STAINLESS STEEL	PASSIVATED.
Center contact	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL2
Outer contact		
Insulator	PTFE	
Gasket		
Others parts		
-	-	-
-	-	-

PAGE 2/2

ISSUE **2032A**

SERIES **SMA-S**

PART NUMBER **R126416061**

PACKAGING

Standard	Unit	Other
1	-	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-18	GHz
VSWR	1.1 + 0,0100	x F(GHz) Maxi
Insertion loss	0.02+0.05	\sqrt{F} (GHz) dB Maxi
RF leakage	- (110	- F(GHz)) dB Maxi
Voltage rating	335	Vrms Maxi
Dielectric withstanding voltage	1000	Vrms mini
Insulation resistance	5000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention	NA	N mini
Axial force – Mating End	NA	N mini
Axial force – Opposite end	NA	N.mini
Torque	NA	N.cm mini
Recommended torque		
Mating	NA	N.cm
Panel nut	NA	N.cm
Mating life	500	Cycles Maxi
Weight	3,6000	g Maxi

ENVIRONMENTAL

Operating temperature	-65/+105	°C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

SPECIFICATION

According to ESCC 3402
According to ESCC 3402 002

OTHER CHARACTERISTICS

Assembly instruction:**NA**

Others: