


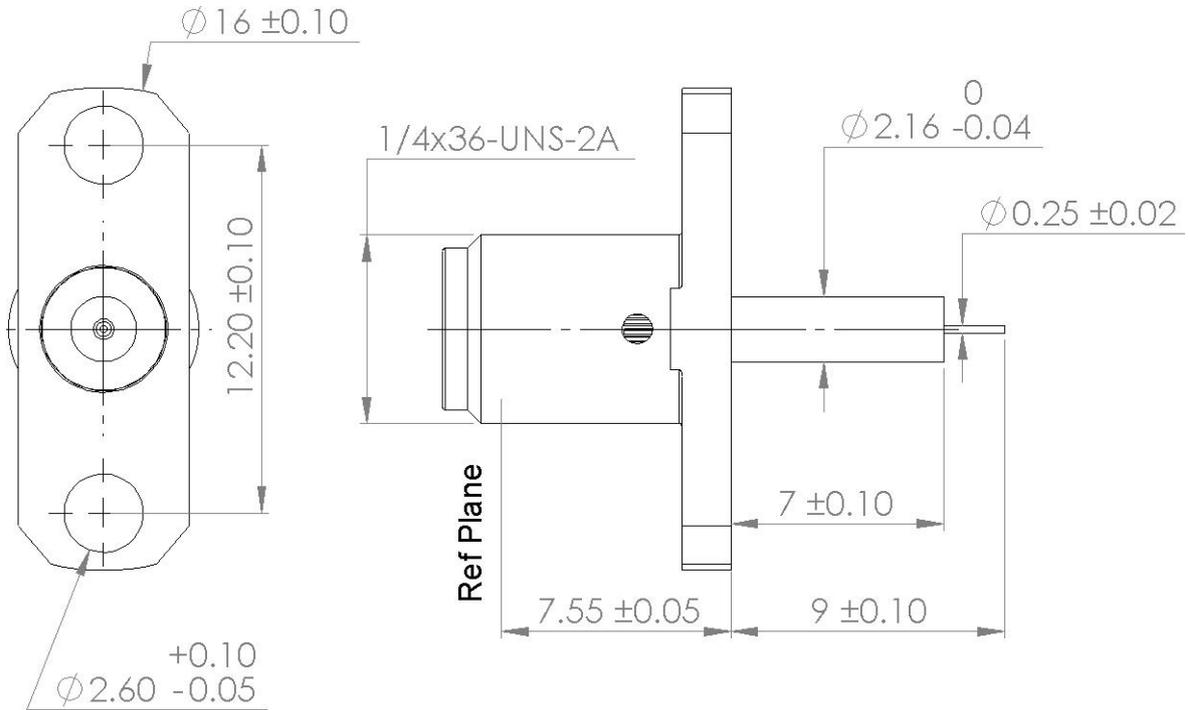


PAGE 1/2	ISSUE 2013A	SERIES SMA-S	PART NUMBER R126462060
----------	-------------	--------------	------------------------



All dimensions are in mm.

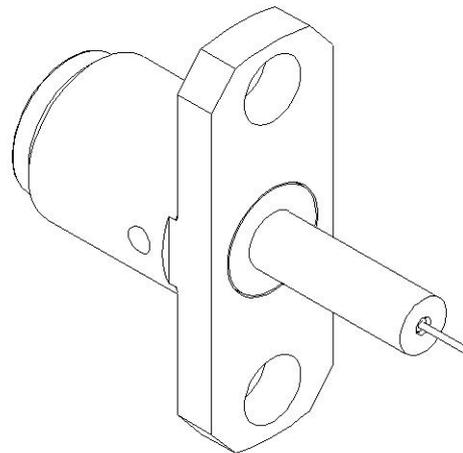

COMPONENTS	MATERIALS	PLATING (μm)
Body	BERYLLIUM COPPER	GOLD 2.5 OVER COPPER 2.5
Center contact	BERYLLIUM COPPER	GOLD 2.5 OVER COPPER 2.5
Outer contact		
Insulator	PTFE	
Gasket		
Others parts		
-	-	-
-	-	-

PAGE 2/2	ISSUE 2013A	SERIES SMA-S	PART NUMBER R126462060
----------	-------------	--------------	-------------------------------

PACKAGING

Standard	Unit	Other
1	-	Contact us

ELECTRICAL CHARACTERISTICS

Impedance		50	Ω	
Frequency		0-12.4	GHz	
VSWR	1.04	+	0,0180	x F(GHz) Maxi
Insertion loss		0.02	+0.03	√F(GHz) dB Maxi
RF leakage	-	(95	- F(GHz)) dB Maxi
Voltage rating			335	Vrms Maxi
Dielectric withstanding voltage			1000	Vrms mini
Insulation resistance			5000	MΩ mini

ENVIRONMENTAL

Operating temperature	-65/ +105	°C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

Center contact retention			
Axial force – Mating End		27	N mini
Axial force – Opposite end		NA	N mini
Torque		NA	N.cm mini
Recommended torque			
Mating		80-120	N.cm
Panel nut		NA	N.cm
Mating life		500	Cycles Maxi
Weight		2.4	g Maxi

SPECIFICATION

According to ESCC3402
According to ESCC3402/002

OTHER CHARACTERISTICS

Assembly instruction:

Others: