



PAGE 1/2	ISSUE 2033A	SERIES SMA 2.9	PART NUMBER R127882001X
----------	-------------	----------------	-------------------------

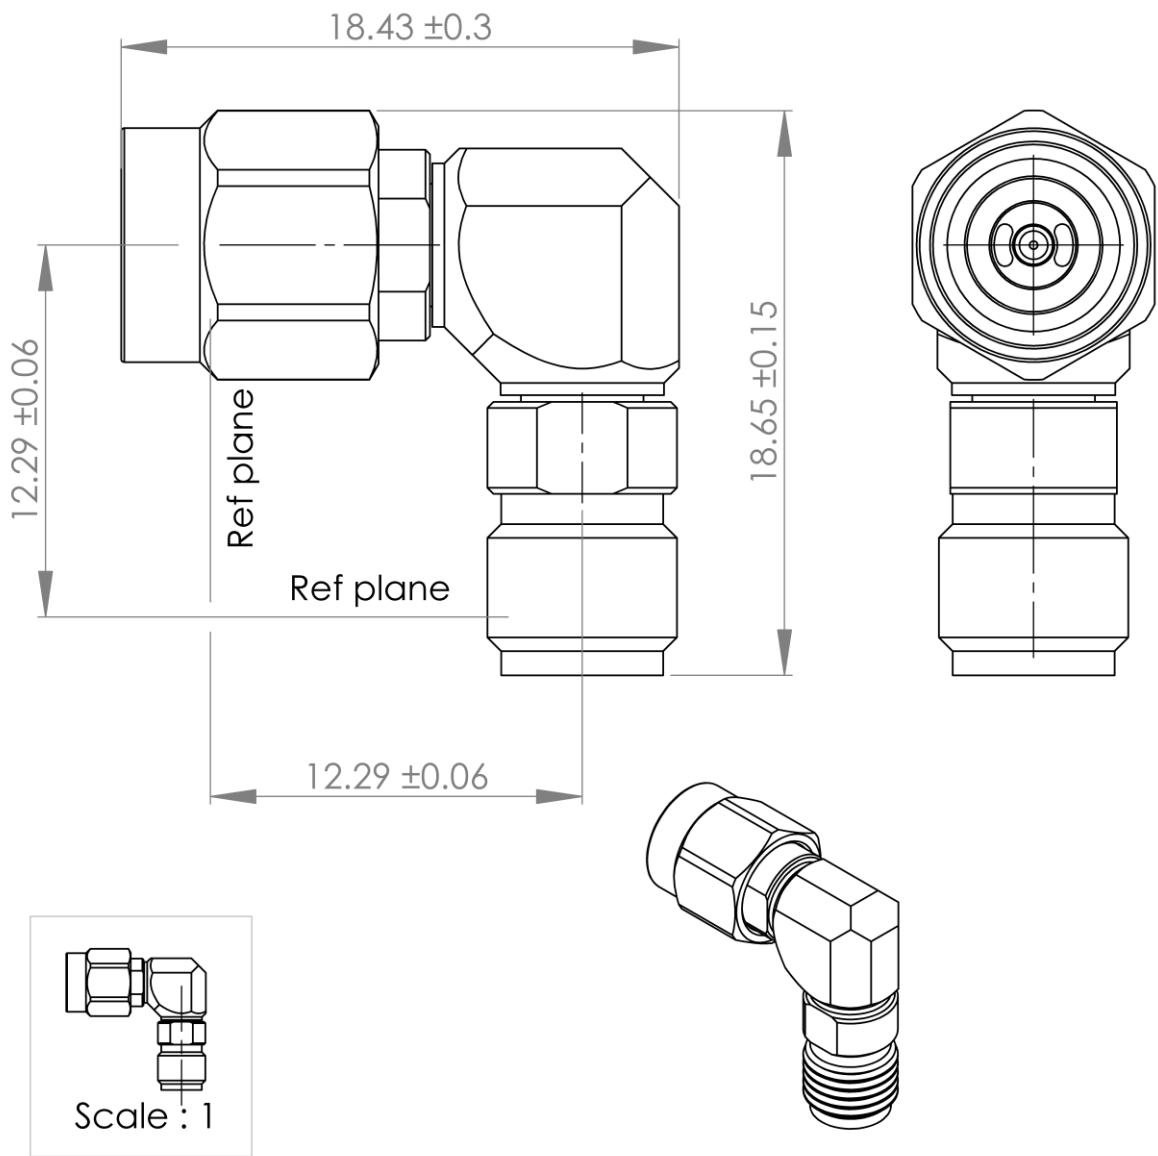

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
Body	STAINLESS STEEL	PASSIVATED.
Center contact	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL2
Outer contact	BRASS	GOLD 1.3 OVER NICKEL2
Insulator	ULTEM1000	
Gasket	SILICONE 60 SHORE A, RED	
Others parts	STAINLESS STEEL	PASSIVATED.
-	-	-
-	-	-

PAGE 2/2

ISSUE 2033A

SERIES SMA 2.9

PART NUMBER R127882001X

PACKAGING

Standard	Unit	Other
1	-	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	DC-40	GHz
VSWR	1.20 + 0,0000	x F(GHz) Maxi
Insertion loss	0.02+0.07	√F(GHz) dB Maxi
RF leakage	- (120	- F(GHz)) dB Maxi
Voltage rating	350	Vrms Maxi
Dielectric withstanding voltage	750	Vrms mini
Insulation resistance	5000	MΩ mini

ENVIRONMENTAL

Operating temperature	-65/ +165	°C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating End	27	N mini
Axial force – Opposite end	27	N mini
Torque	NA	N.cm mini
Recommended torque		
Mating	80-115	N.cm
Panel nut	NA	N.cm
Mating life	500	Cycles Maxi
Weight	6,8000	g Maxi

SPECIFICATION

RAD-GEN-CONN 001
RAD-DET-CONN 007

OTHER CHARACTERISTICS

Assembly instruction:

Others:

Insertion loss, VSWR shall be measured at 100% during production test (Go/ Nogo)
Use tool R282.333.101