




PAGE 1/2	ISSUE 1442D	SERIES N	PART NUMBER R161585200
----------	-------------	----------	------------------------

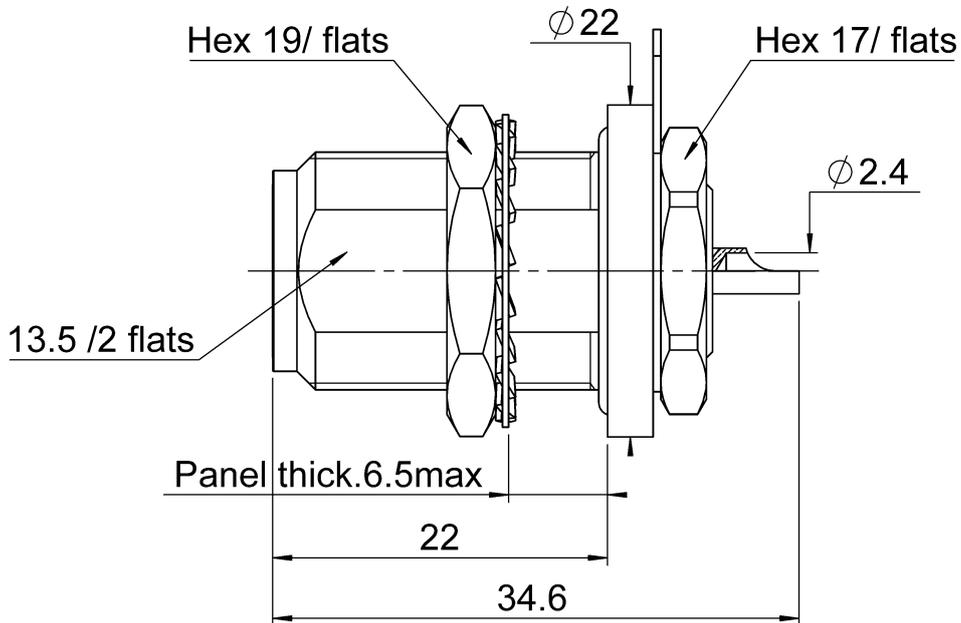


PANEL CUT OUT

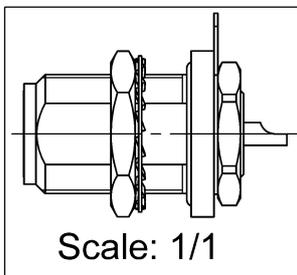

	mm	
	Maxi	mini
A	16.1	16
B	13.7	13.6

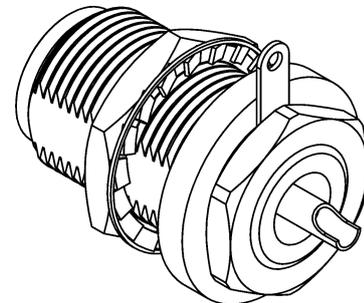

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
Body	BRASS	BBR
Center contact	BERYLLIUM COPPER	GOLD OVER NICKEL
Outer contact	BRASS	BBR
Insulator	PTFE	
Gasket	SILICONE RUBBER	
Others parts	BRASS	BBR
-	-	-
-	-	-

PAGE 2/2	ISSUE 1442D	SERIES N	PART NUMBER R161585200
----------	-------------	----------	------------------------

PACKAGING

Standard	Unit	Other
50	Contact us	Contact us

ELECTRICAL CHARACTERISTICS

Impedance		50	Ω
Frequency		0-11	GHz
VSWR	1.04	+	0.0040 x F(GHz) Maxi
Insertion loss		.015*	√F(GHz) dB Maxi
RF leakage	- (101	- F(GHz)) dB Maxi
Voltage rating		1400	Veff Maxi
Dielectric withstanding voltage		2500	Veff mini
Insulation resistance		5000	MΩ mini

MECHANICAL CHARACTERISTICS

Center contact retention			
Axial force – Mating End		27	N mini
Axial force – Opposite end		27	N mini
Torque		NA	N.cm mini
Recommended torque			
Mating		NA	N.cm
Panel nut		500	N.cm
Mating life		500	Cycles mini
Weight		35.2470	g

ENVIRONMENTAL

Operating temperature	-55/+155	°C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	IP 67	

SPECIFICATION

OTHER CHARACTERISTICS

Assembly instruction:

Others:

*** Coaxial Transmission Line Only**