


Series
NSX

Front Release / Front Removable Pin Quadrax # 8 Cavity Reducer
for ML or MT LuxCis Optical Contact

Issue:
Oct. 25, 2018

Page
1/1

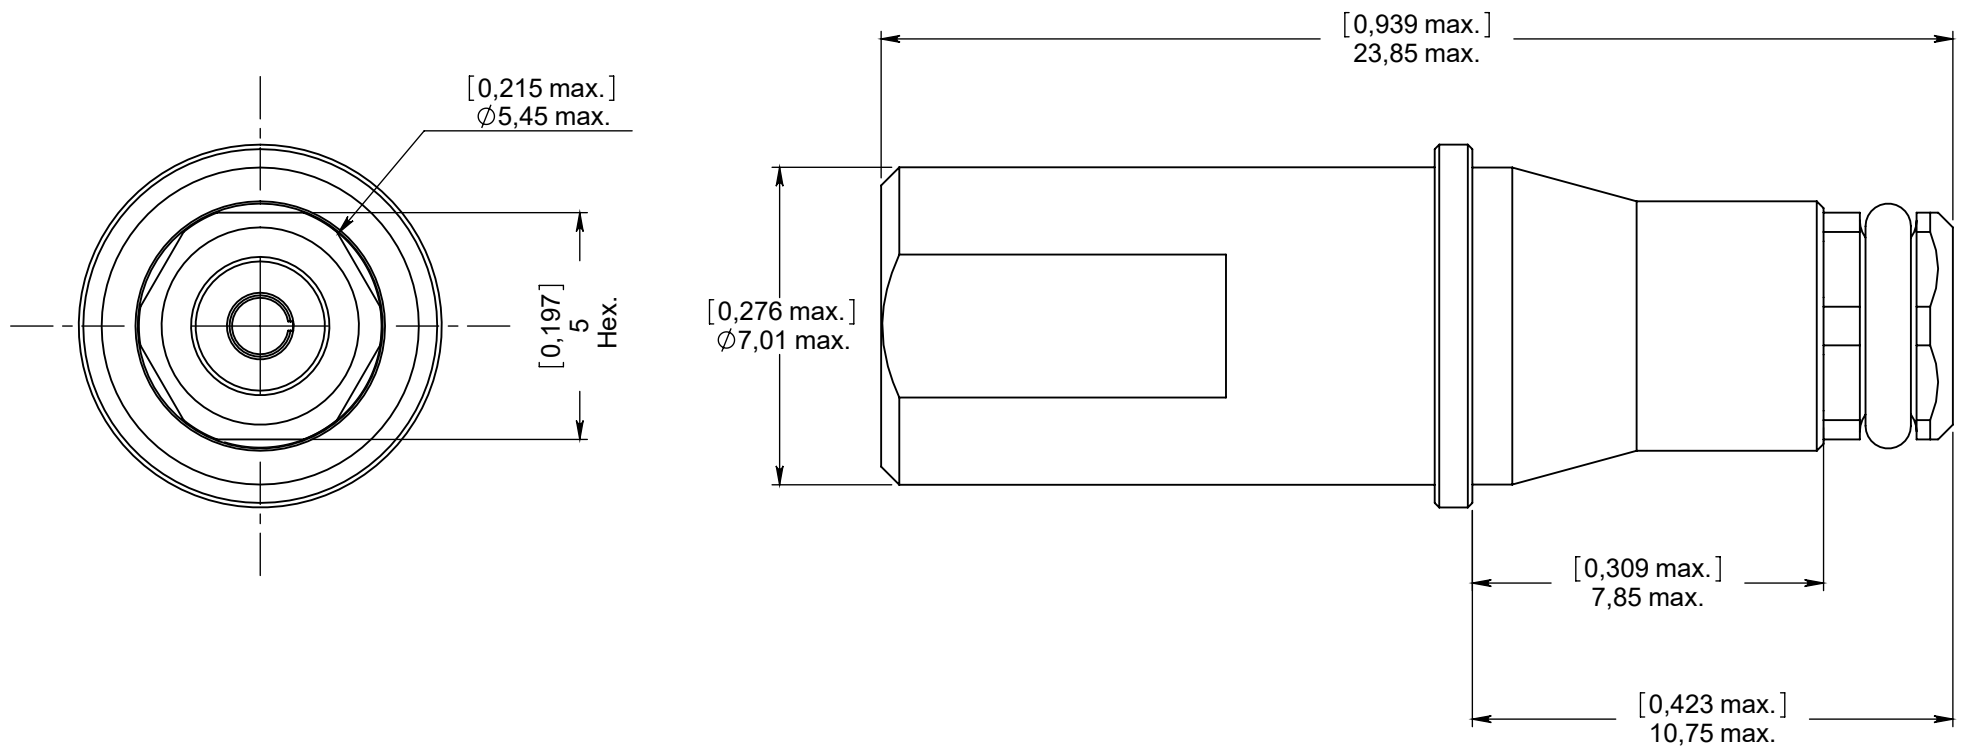

MATERIALS :

- Body : Brass per SAE-C 38500.
- Retention clip : Beryllium copper per ASTM B194 or B196.
- Sleeve holder : Brass per SAE-C 38500.
- Alignment sleeve : Phosphor bronze per ASTM B139/b139 M-01.
- "O" ring : Fluorosilicone elastomer.

FINISHES :


- Body : Electrodeposited nickel per SAE-AMS-QQ-N-290

EXTRACTION TOOL :


P/N : 282549009

Notes :

- Sleeve holder can be remove with a tubular hexagon box spanner across flats of 5 [0,197].
- Coupling torque: $0.25 \text{ N.m} \pm 5\%$ [2.215 lbf.in 5%].
- Can be ordered separately : P/N 620 946 004.

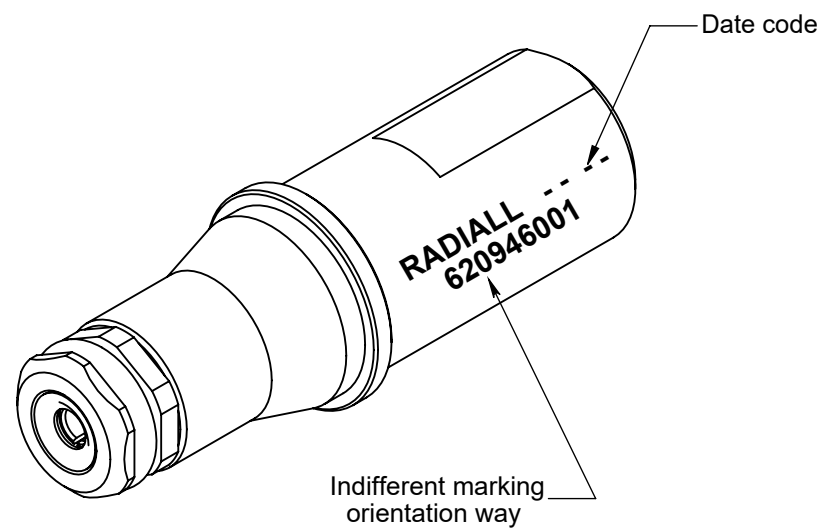

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 5 g

CREATION				
PEN: M010400065A EPF0203-3 NOM: HUGER D. DATE: Dec. 13, 2004 APPR.: PERRIN H.				
	Oct. 25, 18	Added Extraction tool P/N.	Legendre T.	Branjonneau
	Jan. 30, 12	Suppressed HL and HT compatibility in title	Legendre T.	Dupuis V.
	July 02 08	$0.25 \text{ N.m} \pm 5\%$ [2.215 lbf.in 5%] was $0.25 \text{ to } 0.30 \text{ N.m}$ [2.21 to 2.66 lbf.in]	VALGRESY	BROCHET
	March 31 06	Adding coupling torque.	Perrin H.	MVDM
Issue	Revisions	Name	Approved	

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIALL. This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112_9311