


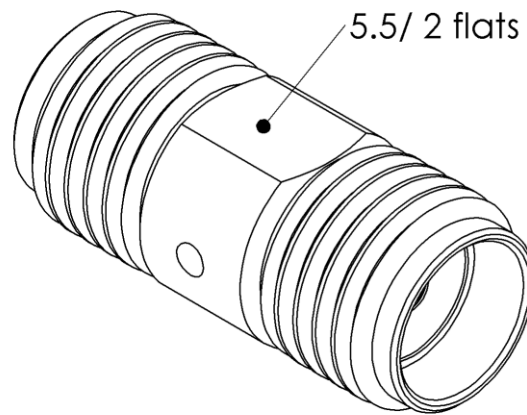


PAGE 1/2	ISSUE 2032A	SERIES SMA-X	PART NUMBER R125705001X
----------	-------------	--------------	-------------------------

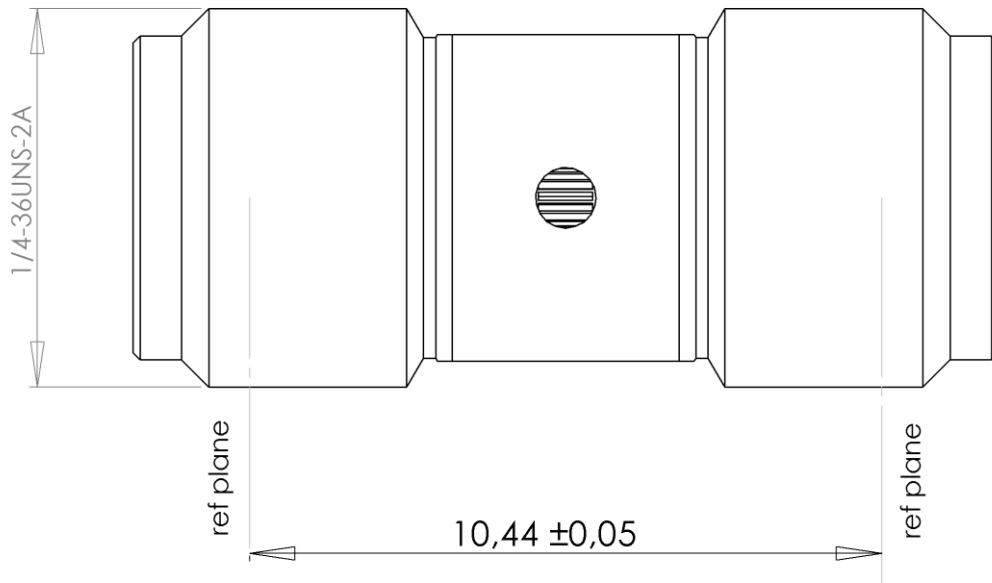

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
Body	STAINLESS STEEL	PASSIVATED.
Center contact	BERYLLIUM COPPER	GOLD 1.3 OVER NICKEL2
Outer contact		
Insulator	PTFE	
Gasket		
Others parts		
-	-	-
-	-	-

PAGE 2/2	ISSUE 2032A	SERIES SMA-X	PART NUMBER R125705001X
----------	-------------	--------------	-------------------------

PACKAGING

Standard	Unit	Other
1	-	Contact us

ELECTRICAL CHARACTERISTICS

Impedance		50	Ω
Frequency		1-18	GHz
VSWR	1.08	+	0,0100 x F(GHz) Maxi
Insertion loss		0.02+0.05	√F(GHz) dB Maxi
RF leakage	- (100	- F(GHz)) dB Maxi
Voltage rating		500	Vrms Maxi
Dielectric withstanding voltage		500	Vrms mini
Insulation resistance		1000	MΩ mini

ENVIRONMENTAL

Operating temperature	-65 +165	°C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

MECHANICAL CHARACTERISTICS

Center contact retention			
Axial force – Mating End		27	N mini
Axial force – Opposite end		27	N mini
Torque		NA	N.cm mini
Recommended torque			
Mating		80-120	N.cm
Panel nut		NA	N.cm
Mating life		500	Cycles Maxi
Weight		0,5500	g Maxi

SPECIFICATION

RAD-GEN-CONN 001
RAD-DET-CONN 004

OTHER CHARACTERISTICS

Assembly instruction:

Others: