


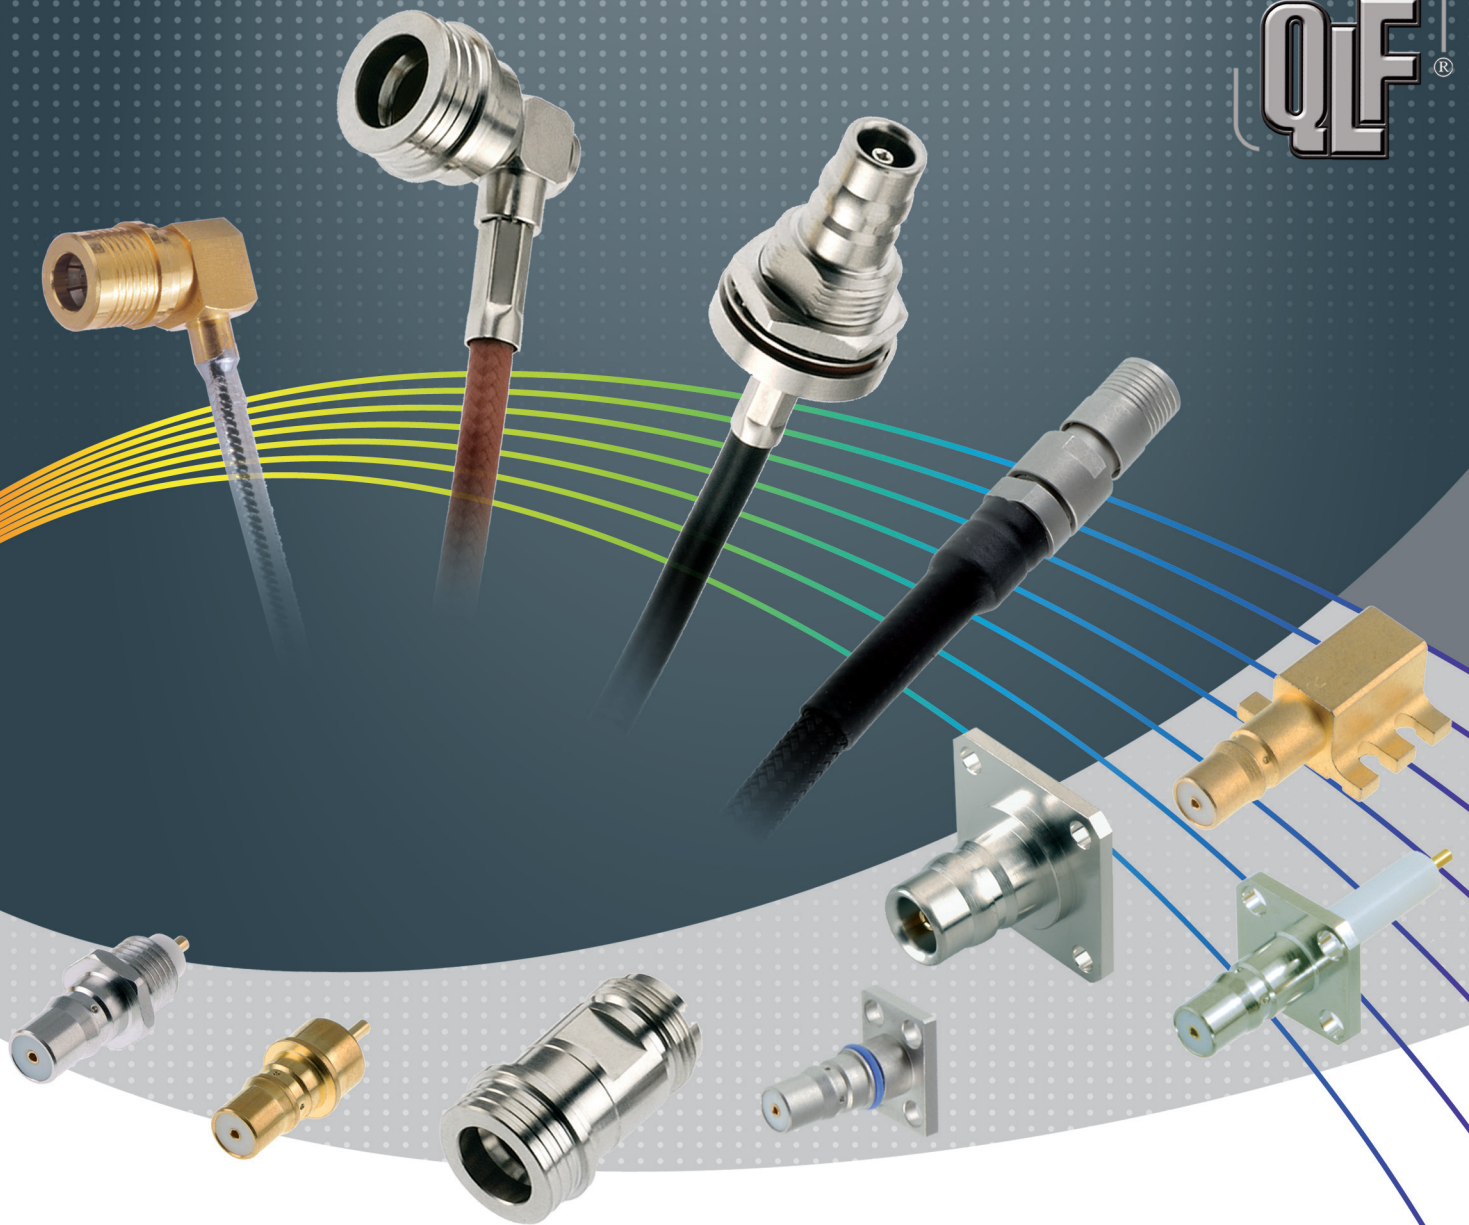

QMA / WQMA / QN / QRE series

R123 / R164 / R324

Pages

QMA and WQMA

Introduction	9-4 to 9-5
Characteristics	9-6 to 9-7
QMA plugs and jacks	9-7 to 9-8
QMA receptacles	9-9 to 9-10
QMA accessories and adapters	9-11 to 9-12
QMA panel drilling and assembly instructions	9-12 to 9-13
WQMA plugs and receptacles	9-14

QN

Introduction	9-4 to 9-5
Characteristics	9-15 to 9-16
Plugs and jacks	9-16 to 9-18
Receptacles	9-18 to 9-19
Accessories and adapters	9-19 to 9-20
Panel drilling and assembly instructions	9-20 to 9-21

QRE


Introduction	9-22
Characteristics	9-22
Plugs, jacks and receptacles	9-23
Accessories and adapters	9-24

INTRODUCTION

The "Quick Lock Formula®": your cost saving solution

Radiall's patented QMA and QN connectors are now the standard for the RF telecommunications industry. The "QLF" registered trademark, **Quick Lock Formula®**, standard applies to the QMA and QN series and guarantees the full intermateability between suppliers using this trademark. Using QLF certified connectors also guarantees the highest RF transmission performance.

QMA (Quick Lock SMA) and **QN** connectors (Quick Lock N) enable fast, secured and easy matings with minimum space requirements. The **QMA** and **QN** series are the perfect alternative to SMA and N connectors in new generation telecommunication systems as well as in many other RF applications.

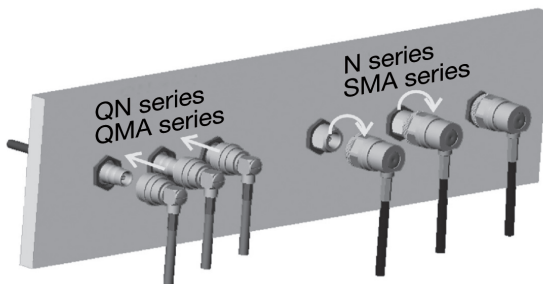

Saving installation time: ten times faster

QMA and QN connectors are **ten times faster** to connect compared to N or SMA connectors reducing the cost of ownership. With their snap-on interface, it takes only two seconds to connect **QN** and SMA connectors in field conditions.

Secure connection: Click!

The snap-on connection is insured by a chamfer. In addition, a positive locking system insures an excellent and secure connection. The disengagement force is lower than the panel tear-off force, preventing any panel damage. **QN** and **QMA** connectors have been successfully tested against vibration.




Flexibility: 360° rotation

The cabled plug can freely rotate around the jack, which allows for more flexibility during the mounting process and eases the installation within the equipment. In addition, it prevents from any added stress on the cable and return loss reduction due to cable bending. As no torque wrench is required, the risk in damaging or scratching the panel is eliminated.

Space saving

QN and QMA connectors have a lower space requirement since space for the use of a torque wrench is not necessary. Therefore the distance between connectors is optimized on the panel.

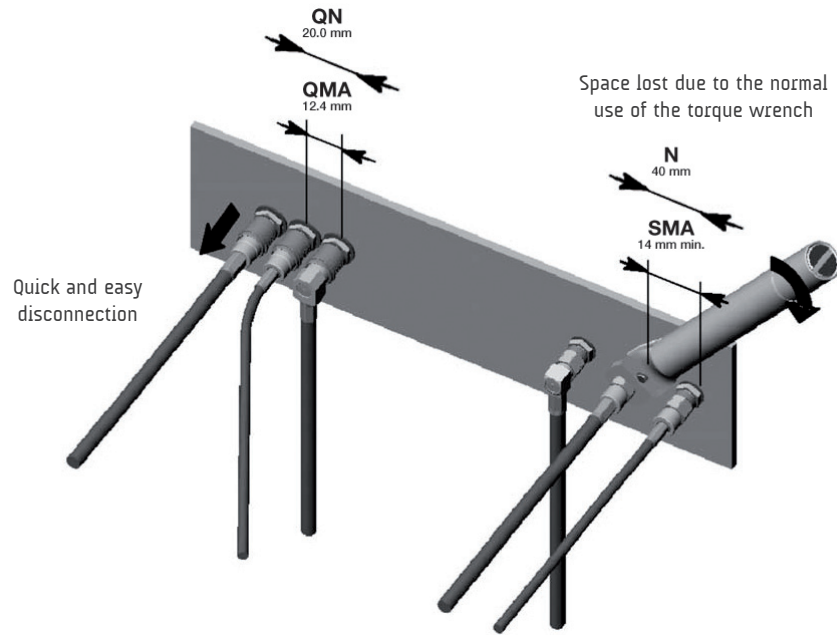

QMA Series

The QMA series with Quick Lock Formula®, is the innovative patented snap-on generation of brass SMA connectors. With the same interface dimensions, QMA connectors have the identical high electrical performances as the SMA series with an easier and faster mounting design. The QMA series is a cost effective solution for the new generation of base stations. The QMA series is designed for DC to 18 GHz. This series features 100 matings and total reliability as the standard commercial SMA connectors. They are fast and easy to connect and disconnect. The new QMA series offers a large range of connectors: straight and right angle plugs, bulkhead jacks, flange receptacles, PCB receptacles, adapters and more. Models are either full crimp, crimp or solder type for flexible, semi-rigid or conformable cables.

WATERPROOF QMA Series

Radiall expands its QMA product line with new high density RF coaxial Waterproof QMA (WQMA) connector solutions with fast and easy snap-on Quick Lock technology. WQMA connectors offer outstanding electrical performance and have environmental characteristics that provide for long lasting durability needed for the most demanding harsh outdoor applications, thus eliminating the need for costly and bulky watertight enclosures or cable entries. Waterproof QMA Connectors are fully intermateable and backward compatible with any QLF® certified standard QMA connectors and they provide for excellent ingress protection.

- IP 68 rating when mated
- 100 matings minimum for durability
- Wide temperature range -40° C / +105° C
- Power rating 200W @ 1 GHz, 75° C

QN Series

Offering the same operating frequency range between DC and 11 GHz as the N series, the new QN series performance has been optimized from DC to 6 GHz for 50Ω applications.

The new QN interface typically features a VSWR of 1.05 from DC to 3 GHz and 1.12 from 3 to 6 GHz. The corresponding return loss is 32 dB from DC to 3 GHz and 25 dB from 3 to 6 GHz.

The high screening effectiveness enables a level of RF leakage as low as -90 dB from DC to 3 GHz and -80 dB from 3 to 6 GHz.

Designed for indoor and outdoor applications such as BTS, antenna systems or test and measurement devices, QN connectors offer an outstanding intermodulation level (-155 dBC / -112 dBm) and IP rating (water and dust protection). The power rating is 300 W at 2.5 GHz and features 100 matings.

CHARACTERISTICS QMA

Test/characteristics	Values/remarks
----------------------	----------------

ELECTRICAL CHARACTERISTICS

Impedance	50Ω
Frequency range	DC - 6 GHz (optimized) DC - 18 GHz (working range)
Typical V.S.W.R.	
• DC - 3 GHz	1.06
• 3 GHz - 6 GHz	1.12
Max insertion loss	0.25 dB
Insulation resistance	5000 MΩ
Voltage rating	≤ 500 V RMS 50 Hz, sea level
Dielectric withstanding voltage	1500 V RMS 50 Hz, sea level
Contact resistance	
• Center contact	< 3 mΩ
• Outer contact	< 2.5 mΩ
Admissible power @ 2.5 GHz (continuous power)	125 W @ T = 40°C (150 W @ T = 23°C)
Passive Intermodulation	-120 dBc @ 1.8 GHz (2x20W) (static)
RF leakage	
• DC - 3 GHz	-80 dB min
• 3 - 6 GHz	-70 dB min

MECHANICAL CHARACTERISTICS

Mechanical endurance	100 matings
Engagement and disengagement force	
• Engagement	25 N
• Disengagement	20 N
Retention force for interface	> 60 N
Cable retention force	
2.6 / 50 S	90 N
2.6 / 50 D	110 N
5 / 50 S	180 N
5 / 50 D	200 N
5.7 / 50 D	220 N
Distance between connectors: c. to c.	12.4 mm min.
Vibration	40 m.s ⁻² at 500 Hz

ENVIRONMENTAL CHARACTERISTICS

Temperature range	-40 °C, +105 °C
-------------------	-----------------

MATERIALS


Connector bodies	Brass
Male center contact	Brass
Female center contact	Beryllium copper
Outer contact	Bronze
Other metallic parts	Brass
Insulators	PTFE

PLATING

Bodies	BBR
Solder bodies	BBR
SMT Bodies	NPGR
Outer contacts	BBR
Center contacts	NPGR

All dimensions are given in mm

POWER RANGE

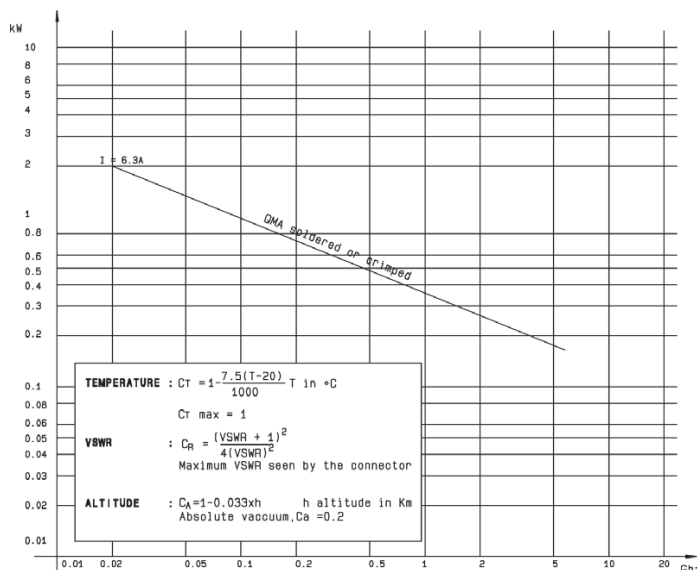

CHARACTERISTICS WQMA

Test/characteristics	Values/remarks
Impedance	50Ω
Frequency	DC - 6 GHz
V.S.W.R.	1.02 + 0.0200*F (GHz) Max
Center contact captivation	Yes
Working temperature range	- 40°C / + 105°C
Mating cycles	100

MATERIALS AND PLATING

	Materials	Platings
Connector body	Brass	BBR / NPGR / Gold over Copper
Male center contact	Brass	NPGR
Female center contact	Beryllium copper	NPGR / Gold over Copper
Outer contact and other metallic parts	Brass	BBR
Gasket	Silicone	
Insulator	PTFE	

STRAIGHT PLUGS

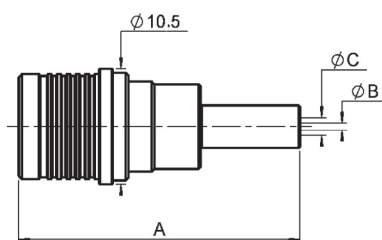


Fig. 1

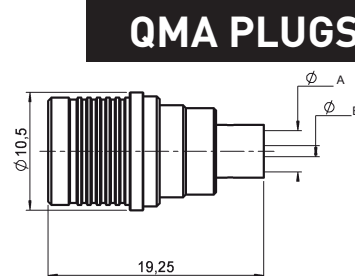


Fig. 2

Cable group	Cable group dia.	Part number	Fig	Dimensions (mm)			Captive center contact	Finish	Packaging	Note
				A	B	C				
RG174/RG316	2.6/50/S	R123 071 000	1	25.5	0.6	1.61	yes	BBR	100 pieces	Crimp type
RD316	2.6/50/D	R123 072 000		25.5	0.6	1.61				
RG58/RG141	5/50/S	R123 075 000		28.5	1.05	3.11				
RG142/RG223/RG400	5/50/D	R123 076 000		28.5	1.05	3.11				
RG405	.085"	R123 054 000	2	2.275	0.6		yes	BBR	100 pieces	Solder type
RG402	.141"	R123 055 000		3.675	1					

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.

Bold part numbers represent products typically in stock & available for immediate shipment.

See page 8 and 9 for packaging information.

PLUGS AND JACKS

RIGHT ANGLE PLUGS




Fig. 1




Fig. 2

A right angle plug for 5.7 mm dia. cable is also available, please consulte us.

Cable group	Cable group dia.	Part number	Fig	Dimensions (mm)		Captive center contact	Finish	Packaging	Note
				A	B				
RG174/RG316	2.6/50/S	R123 172 000	1	19.7	0.6	yes	BBR	100 pieces	Crimp type
RD316	2.6/50/D	R123 174 000		19.7	0.6				
RG58/RG141	5/50/S	R123 175 000		22.7	3.1				
RG142/RG223/RG400	5/50/D	R123 176 000		22.7	3.1				
	5.7/50/D	R123 176 220		22.7	3.85				
RG405	.085"	R123 153 000	2	2.25		yes	BBR	100 pieces	Solder type
		R123 153 003		2.25			Gold		
		R123 153 007		2.25			NPGR		
RG402	.141"	R123 154 000		3.7			BBR		
		R123 154 003		3.7			Gold		

STRAIGHT BULKHEAD JACKS

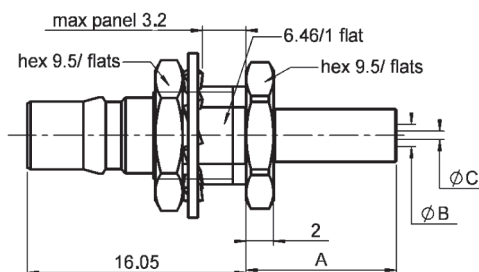


Fig. 1

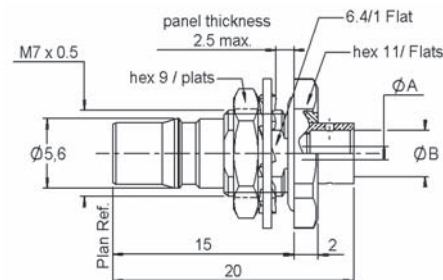


Fig. 2

Cable group	Cable group dia.	Part number	Fig	Dimensions (mm)			Captive center contact	Panel drilling	Finish	Packaging	Note
				A	B	C					
RG174/RG316	2.6/50/S	R123 312 000	1	11	0.6	1.61	yes	P02	BBR	100 pieces	Full crimp type
RD316	2.6/50/D	R123 313 000		11	0.6	1.61					
RG58/RG141	5/50/S	R123 314 000		14	1.05	3.11					
RG142/RG223/RG400	5/50/D	R123 315 000		14	1.05	3.11					
RG405	.085"	R123 326 003		0.6	2.25						
RG402	.141"	R123 305 023	2	1	3.7			P02	Gold	100 pieces	Solder type panel seal

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

STRAIGHT FLANGE FEMALE RECEPTACLES

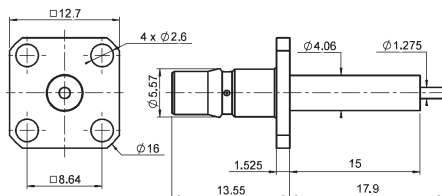


Fig. 1

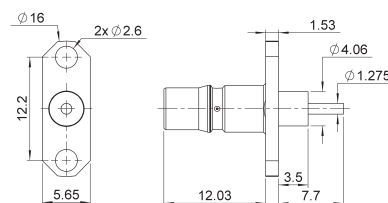


Fig. 2

Part number	Fig	Captive center contact	Dimensions (mm)		Panel drilling	Finish	Note
			A	B			
R123 415 000	1	yes	15	17.9	P01	BBR	Straight flange
R123 425 100			10	13			Straight flange Panel seal
R123 464 110	2				P04		Straight flange

RECEPTACLES




Fig. 1




Fig. 2




Fig. 3




Fig. 4

Part number	Fig	Captive center contact	Panel drilling	Finish	Note
R123 553 000	1	yes	P02	BBR	Bulkhead receptacle
R123 555 020	2		P06	BBR	Screw on front mount
R123 555 112	3		P06	NPGR	Screw on front mount
R123 590 027	4		P05	NPGR	Press mount

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

RECEPTACLES

STRAIGHT PCB RECEPTACLES



Fig. 1


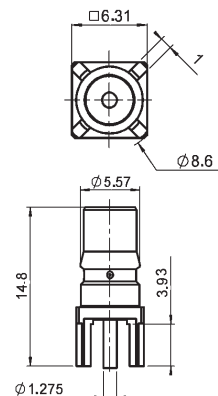


Fig. 2



Part number	Fig	Captive center contact	Finish	Assembly instructions	Panel drilling	Packaging	Note
R123 426 003	1	yes	NPGR		P03	100/bulk	SMT
R123 427 803	2			M01		100/reel	

PCB RECEPTACLES



Fig. 1





Fig. 2







Fig. 3

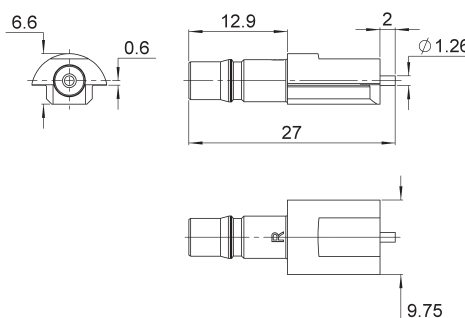

Part number	Fig	Captive center contact	Finish	Assembly instructions	Panel drilling	Packaging	Note
R123 680 003	1	yes	NPGR		P03	100/bulk	SMT
R123 682 827	2			M01		100/reel	
R123 682 837	2					250/reel	
R123 682 867	2					250/reel	Right angle SMT
R123 444 827	3					300/reel	Female edge card

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

MALE CAPS WITH CORD

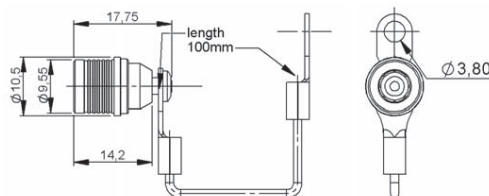

Part number	Finish	Packaging
R123 805 000	BBR	100

IN SERIES ADAPTERS




Fig. 1




Fig. 2




Fig. 3

Part number	Fig	Captive center contact	Finish	Note	Packaging
R123 703 000	1	yes	BBR	QMA MALE - QMA MALE	100 pieces
R123 704 000	2			QMA FEMALE - QMA MALE	
R123 705 000	3			QMA FEMALE - QMA FEMALE	

BETWEEN SERIES ADAPTERS QMA/SMA




Fig. 1




Fig. 2




Fig. 3








Fig. 4

Part number	Fig	Captive center contact	Finish	Note	Packaging
R191 910 000	1	yes	BBR	QMA MALE - SMA MALE	1
R191 911 000	2			QMA MALE - SMA FEMALE	
R191 912 000	3			QMA FEMALE - SMA MALE	
R191 913 000	4			QMA FEMALE - SMA FEMALE	

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

ADAPTERS


BETWEEN SERIES ADAPTERS QMA / N




Part number	Fig	Finish	Note	Packaging
R191 762 000	1	BBR	QMA FEMALE - N MALE	1
R191 763 000	2		QMA MALE - N FEMALE	
R191 764 000	3		QMA FEMALE - N FEMALE	
R191 765 000	4		QMA MALE - N MALE	

PANEL DRILLING


P01




P02




P03




P04



P05



P06



To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

PLUGS, JACKS AND RECEPTACLES

STRAIGHT PLUGS

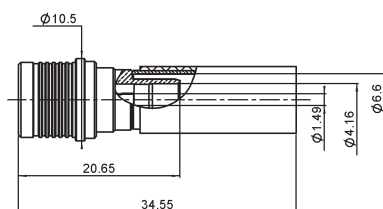


Fig. 1

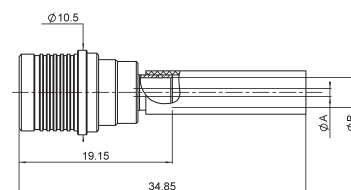


Fig. 2

Cable group	Cable group dia.	Part number	Fig.	Dimensions		Finish	Ingress protection	Note	Packaging
				A	B				
ECO 230	6/50/D	R123W 096 100	1	–	–	BBR	IP68	Crimp type	100 pieces
hand formable / RG405	.085"	R123W 054 000	2	0.6	2.275			Solder type	
hand formable / RG402	.141"	R123W 055 000	2	1.0	3.70				

RIGHT ANGLE PLUGS

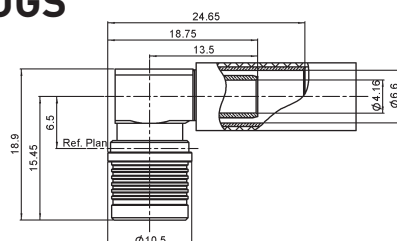



Fig. 1


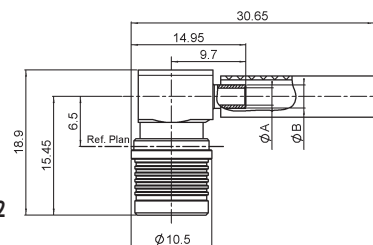


Fig. 2

For assembling, tool **R282 761 000** is recommended

Cable group	Cable group dia.	Part number	Fig.	Dimensions		Finish	Ingress protection	Note	Packaging
				A	B				
ECO 230	6/50/D	R123W 176 000	1	–	–	BBR	IP68	Crimp type	100 pieces
hand formable / RG405	.085"	R123W 153 000	2	2.275	3.05			Solder type	
hand formable / RG402	.141"	R123W 154 000	2	3.70	4.40				

STRAIGHT BULKHEAD JACKS SOLDER TYPE (Panel seal)



Cable group	Cable group dia.	Part number	Dimensions			Finish	Ingress protection	Packaging
			A	B	C			
hand formable / RG405	.085"	R123 326 003	0.60	2.275	3.05	Gold	IP67	100 pieces
hand formable / RG402	.141"	R123 305 023	1.00	3.70	4.80			

RECEPTACLES (Panel seal)

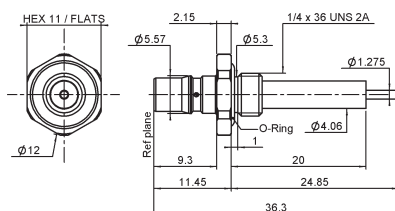



Fig. 1




Fig. 2




Fig. 3

Part number	Fig	Finish	Ingress protection	Note	Packaging
R123 555 080	1	BBR	IP67	Front mount-Screw on	100 pieces
R123 425 100	2			Square flange	
R123 426 067	3	NPGR	IP66	PCB receptacle	

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

Test/characteristics	Values/remarks
----------------------	----------------

ELECTRICAL CHARACTERISTICS

Impedance	50Ω
Frequency range	DC - 6 GHz (optimized) DC - 11 GHz (working range)
Return loss typical - DC - 3 GHz 3 GHz - 6 GHz	≥ 32 dB / 1.05 ≥ 25 dB / 1.12
Intermodulation	Better - 155 dBc (2 x 43 dBm)
RF Leakage	100 MHz to 3 GHz better than - 90 dB 3 to 6 GHz better than - 80 dB
Dielectric withstanding voltage in VRMS (interface) at sea level, 50 Hz	2500
Working voltage in VRMS (interface) at sea level, 50 Hz	≤ 1000
Insulation resistance	≤ 5.10 ³ MΩ
Contact resistance - initial - after test	Center contact ≤ 1 mΩ ≤ 1.5 mΩ Outer contact ≤ 0.25 mΩ ≤ 1 mΩ

MECHANICAL CHARACTERISTICS

Durability matings	≥ 100
Force to engage and disengage typical	40 N
Retention force for interface	≥ 450 N (101.25 Lbs)
Bending moment admissible interface	≤ 10 Nm
Contact captivation - cable connectors - receptacles	≥ 28 N ≥ 18 N

ENVIRONMENTAL CHARACTERISTICS

Temperature range	- 55°C + 125°C
Climatic category	40 / 125 / 21 (IEC 60169 1 16.2)
Shock	MIL STD 202F, method 213, condition I
Rapid change of temperature	IEC 60169-1 16.4 (-40°C + 125°C)
Corrosion salt spray	Test acc. to MIL STD 202F, method 101D, condition B
Vibration	IEC 1169-1 paragraph 9.3.3 (10-500 Hz; 5g)
Moisture resistance	MIL STD 202 F, method 106F
Water resistance	IP 68


MATERIALS AND PLATING

	Materials	Platings
Body	Brass	BBR over Silver
Center contact	Brass / Beryllium copper	Silver passivated over copper
Outer contact	Beryllium copper	BBR over Silver
Insulator	PTFE	
Others parts	Brass	BBR

All dimensions are given in mm

CHARACTERISTICS

POWER RANGE

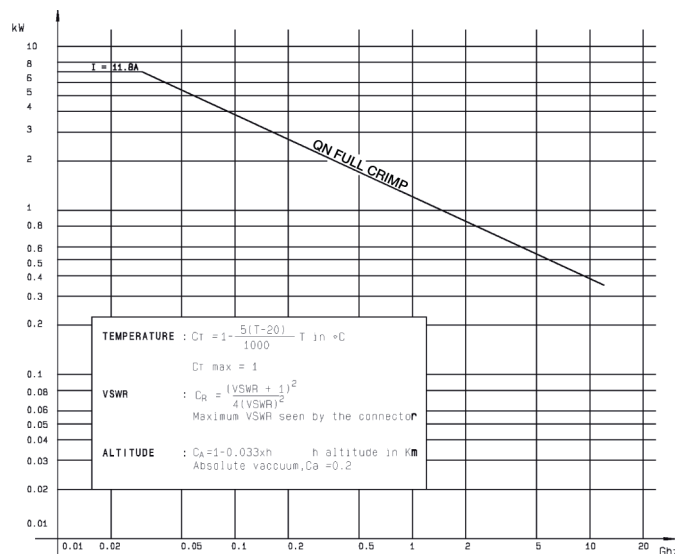

PLUGS

STRAIGHT PLUGS, FULL CRIMP TYPE, FOR FLEXIBLE CABLES




Fig. 1


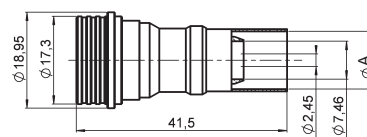


Fig. 2

Cable group	Cable group dia.	Part number	Fig	Dimensions (mm)	Captive center contact	Packaging
				A		
RG58/RG141	5/50/S	R164 075 000	1	5.41	no	50 pieces
RG142/RG223/RG400	5/50/D	R164 076 000	1	5.8		
RG213	10/50/S	R164 080 000	2	11.05		

STRAIGHT PLUGS, SOLDER TYPE, FOR SEMI-RIGID CABLES

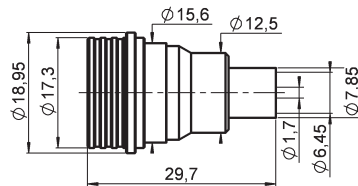

Cable group	Cable group dia.	Part number	Captive center contact	Packaging
RG401	.250"	R164 054 002	no	50 pieces

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
See page 8 and 9 for packaging information.

RIGHT ANGLE PLUGS




Fig. 1




Fig. 2




Fig. 3

Cable group	Cable group dia.	Part number	Fig	Dimensions (mm)			Captive center contact	Packaging	Note
				A	C	D			
RG58/RG141	5/50/S	R164 175 000	1	5.41	-	-	yes	50 pieces	Crimp type
RG142/RG223/RG400	5/50/D	R164 176 000	1	5.8	-	-			
RG213	10/50/S	R164 184 000	2	11.05	27	36.5			
RG402	.141"	R164 152 000	3				yes	50 pieces	Solder type

STRAIGHT JACKS




Fig. 1

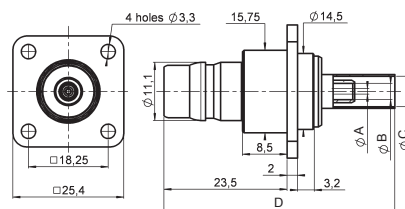


Fig. 2

Cable group	Cable group dia.	Part number	Fig	Dimensions (mm)				Captive center contact	Packaging	Note
				A	B	C	D			
RG402	.141"	R164 336 000	1	0.97	3.68	5.18	26.6	yes	50 pieces	Solder type
RG58/RG141	5/50/S	R164 282 000	2	1.05	3.11	5.41	44.1	no	50 pieces	25.4 mm square flange crimp type
RG142/RG223/RG400	5/50/D	R164 283 000	2			5.8				
RG213	10/50/S	R164 286 000	2	2.45	7.46	11.05	46.1			

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

BULKHEAD STRAIGHT JACKS (Panel seal)

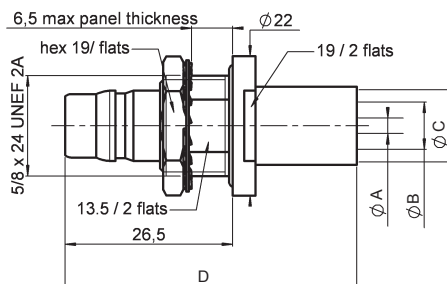
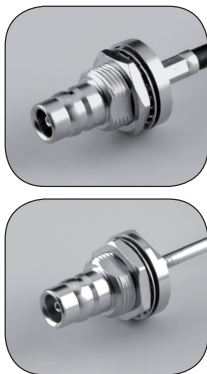


Fig. 1

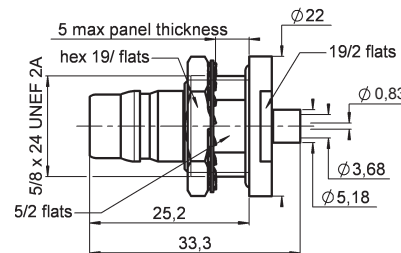


Fig. 2

Cable group	Cable group dia.	Part number	Fig	Dimensions (mm)				Captive center contact	Panel drilling	Packaging	Note	
				A	B	C	D					
RG58/RG141	5/50/S	R164 329 000	1	1.05	3.11	5.41	44.1	no	P03	50 pieces	Rear mount Full crimp type	
RG142/RG223/RG400	5/50/D	R164 329 200				5.8						
RG213	10/50/S	R164 331 000		2.45	7.46	11.05						46.1
RG402	.141"	R164 635 002	2					yes	P03	50 pieces	Rear mount Solder type	

SQUARE FLANGE, STRAIGHT FEMALE RECEPTACLE

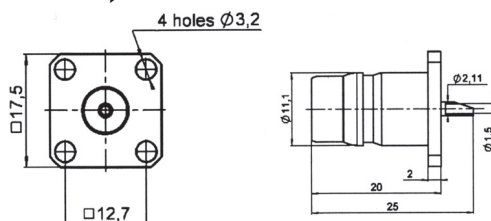


Fig. 1

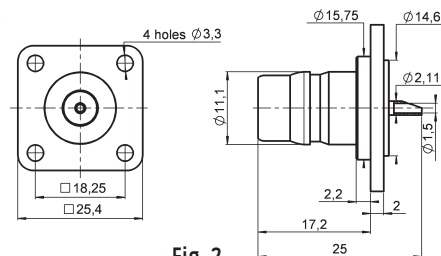


Fig. 2

Part number	Fig	Captive center contact	Panel drilling	Packaging	Note
R164 418 000	1	yes	P01	50 pieces	Solder pot 17.5 square flange
R164 404 000	2	yes	P04	50 pieces	Solder pot 25.4 square flange

RECEPTACLES

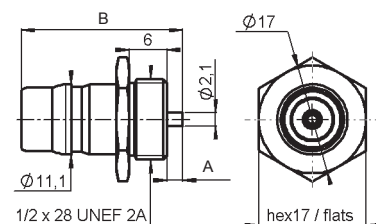
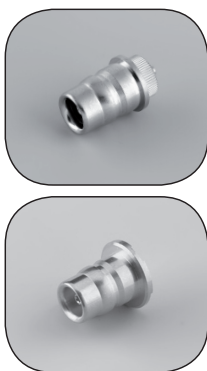


Fig. 1




Fig. 2




Fig. 3

Part number	Fig	Dimensions (mm)		Captive center contact	Assembly instructions	Panel drilling	Packaging	Note
		A	B					
R164 571 027	1	2.5	25.5	yes			50 pieces	Screw-on front mounting
R164 540 027	2			yes		P02	50 pieces	Press-in
R164 501 023	3			yes	M01			Circle flange SMT

WATERPROOF RECEPTACLES




Fig. 1




Fig. 2





Fig. 3

Part number	Fig	Captive center contact	Panel drilling	Packaging	Note
R164 606 000	1	yes	P03	50 pieces	IP68
R164 606 020	2				
R164 606 100	3				

RIGHT ANGLE SMT RECEPTACLE

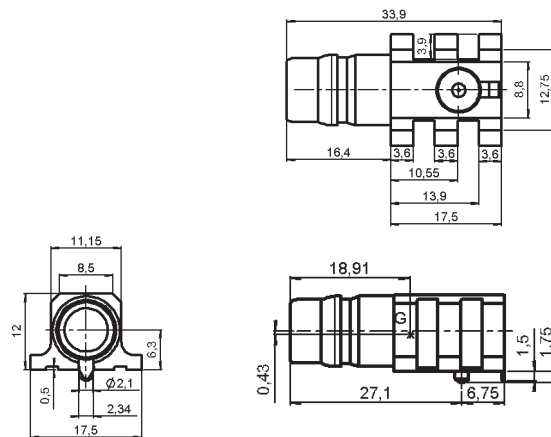

Part number	Captive center contact	Assembly instructions	Packaging
R164 682 803	yes	M01	100 pieces

IN SERIES ADAPTERS




Fig. 1




Fig. 2

Part number	Fig	Captive center contact	Packaging	Note
R164 705 000	1	yes	50 pieces	QN female - QN female
R164 708 000	2			QN male - QN female

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

ADAPTERS AND PROTECTIVE CAP

BETWEEN SERIES ADAPTERS QN/N




Fig. 1




Fig. 2




Fig. 3





Fig. 4

Part number	Fig	Captive center contact	Packaging	Note
R191 757 000	1	yes	unit	QN male - N male
R191 758 000	2	yes	unit	QN female - N male
R191 759 000	3	yes	unit	QN male - N female
R191 760 000	4	yes	unit	QN female - N female


PROTECTIVE CAP

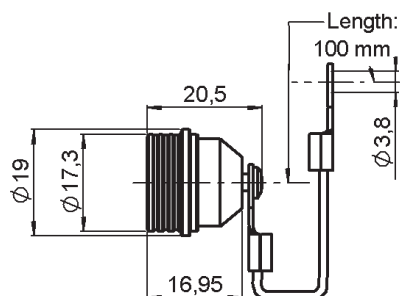


Part number	Designation
R164 804 000	male

PANEL DRILLING


P01




P02




P03



P04




P05




M01

Receptacle soldering pattern:


Part number
R164 501 023

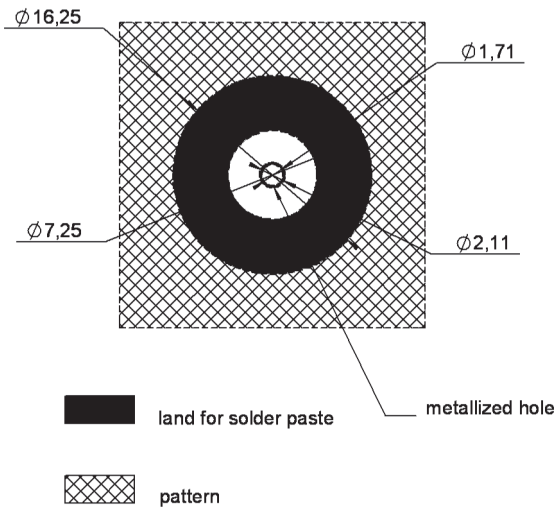


Micro strip line. Signal is on the opposite side.
Thickness of PCB: .063 (1.6 mm).
The material of PCB is the epoxy resin (FR4) (Er = 4.8).
The solder resist should be printed except for the land pattern on the PCB.

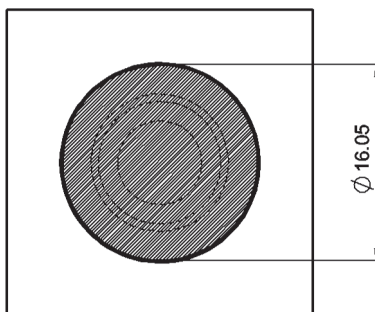

Part number
R164 682 803

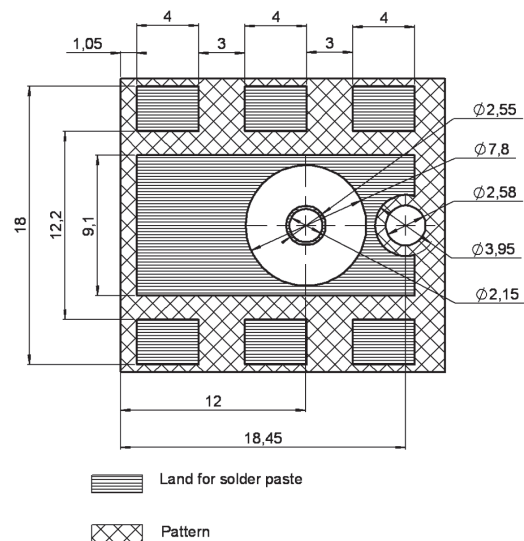

Coplanar line: pattern and signal are on the same side.
Thickness of PCB: .063 (1.6 mm).
The material of PCB is the epoxy resin of glass fabrics backs (Er = 4.8).
The solder resist should be printed except for the land pattern on the PCB.

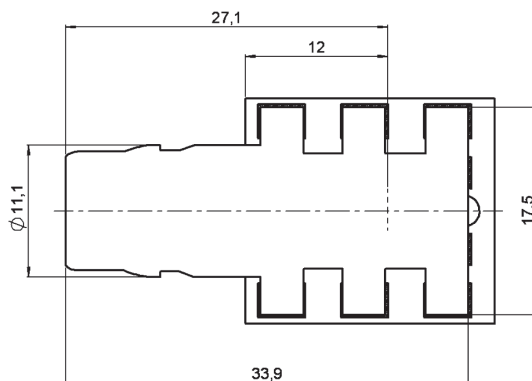

INTRODUCTION

QRE is a Quick lock Ruggedized connector. QRE was developed to provide the same advantages QMA has over SMA and more for aerospace and defense applications.

QRE is made of high grade stainless steel 316L, with Teflon coated fluorosilicone sealing o-rings which make the QRE interface waterproof and ultra resistant to chemical aggression and corrosion. The outer slotted spring contact inspired from the QMA design was reinforced to provide reliable electrical contact during vibration and shock conditions. All QRE material were chosen and optimized to operate within the extended temperature range typical in Mil-Aerospace applications. Its superior latching mechanism provides the advantage of a snap-on connector while ensuring a very robust and secure connection. The retention force of the interface is 3 times higher than the QMA.

With similar dimensions, QRE offers high density integration capabilities like QMA. In addition, a specific tool has been designed to easily disconnect QRE plugs on high density applications such as active array radar modules or panels. A limited range of straight and right angle connectors and receptacles is available for semi-rigid and SHF high frequency flexible cable. New connectors can be quickly developed to fit your own ruggedized coaxial cable. QRE cable assemblies can be delivered using our SHF airframe, lightweight or outdoor cables, with or without antiabrasion jacket. Adapters are available for test and measurement in QRE to SMA and QRE to SMA 3.5 configurations.

CHARACTERISTICS

Test/characteristics	Values/remarks
ELECTRICAL CHARACTERISTICS	
Impedance	50Ω
Frequency range	DC - 12.4 GHz
V.S.W.R. typical	
• DC - 3 GHz	1.06
• 3 GHz - 6 GHz	1.11
• 6 GHz - 12.4 GHz	1.17
Max insertion loss	0.25
Insulation resistance	5000 MΩ min
Voltage rating	335 Veff max
Dielectric withstanding voltage	1000 Veff min
Admissible power (CW)	450 W @ 1 GHz - 100 W @ 18 GHz
RF leakage	-95 dB min @ 3 GHz -80 dB min @ 12.4 GHz

MECHANICAL CHARACTERISTICS

Durability	100 matings
Engagement and disengagement forces	65 N typ
Retention force for interface	150 N min
Minimum connector pitch	12.4 mm (distance between center conductors)
Vibration	MIL STD 202 method 204 condition D
Shock	MIL STD 202 method 213 condition I

ENVIRONMENTAL CHARACTERISTICS

Temperature range	-55/+165°C
IP rating	IP 68
Hermeticity (when mated)	10 ⁻⁶ atm.cm ³ /s (CEI 68-2-17 Method Qk)

MATERIALS AND PLATING

	Materials	Platings
Connector bodies	Stainless steel 316L	Passivated
Center contacts	Beryllium copper	Gold over Nickel
Outer contact	Beryllium copper	NPGR
Insulators	PTFE	
O-rings	Fluorosilicone	

All dimensions are given in mm

STRAIGHT AND RIGHT ANGLE PLUGS, SOLDER TYPE





Fig. 1



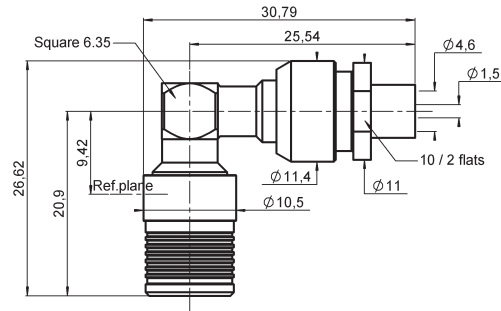


Fig. 2


Cable group	Cable group dia.	Part number	Fig	Captive center contact	Finish
RG 405	.085"	R324 054 L01	1	no	Passivated
SHF5MAF	Special	R324 195 L02	2	no	Passivated

Note: for other semi-rigid or flexible cables, please contact us.

STRAIGHT FLANGE JACK SOLDER TYPE FOR SEMI-RIGID CABLE






mount gasket
after screwing connector
on panel 570.30.158

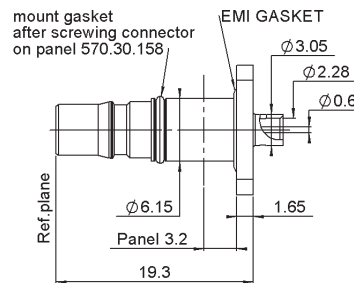

Cable group	Cable group dia.	Part number	Captive center contact	Panel drilling	Finish
RG 405	.085"	R324 256 L01	yes	P01	Passivated

STRAIGHT FLANGE FEMALE RECEPTACLE WITH EMI GASKET



Part number	Captive center contact	Panel drilling	Finish
R324 434 L01	yes	P02	Passivated

Note: replacement O-rings and EMI gaskets available to order, please contact us.

To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.

ADAPTERS AND EXTRACTION TOOL

BETWEEN SERIES ADAPTERS QRE/SMA

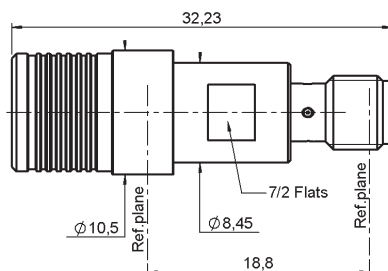


Fig. 1


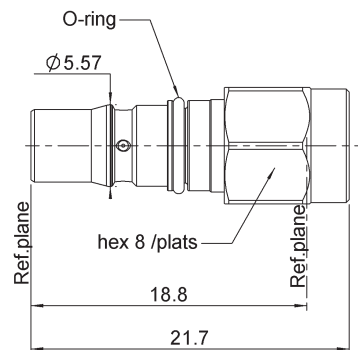


Fig. 2

Part number	Fig	Captive center contact	Finish	Note
R191 926 L01	1	yes	Passivated	QRE MALE – SMA FEMALE
R191 927 L01	2	yes	Passivated	QRE FEMALE – SMA MALE

Note: for QRE to SMA 3.5 adapters, please contact us.

QRE EXTRACTION TOOL

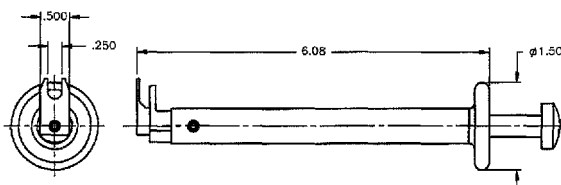


Part number

TA-0457


This tool can be used with either straight or right angle connectors.

PANEL DRILLING

P01



P02



To download data sheets and assembly instructions, visit www.radiall.com & enter the part number in the Search box.
Bold part numbers represent products typically in stock & available for immediate shipment.
 See page 8 and 9 for packaging information.



AEROSPACE



AUTOMOTIVE



DEFENSE



INDUSTRIAL



INSTRUMENTATION



MEDICAL



SPACE



TELECOM

EUROPE

France - RADIALL S.A.

101, Rue Ph. Hoffmann
93116 ROSNY sous BOIS (Paris)
Tel.: +33 1 49 35 35 35 - Fax: +33 1 48 54 63 63
E-Mail: info@radiall.com

Finland - RADIALL SF

P.O. Box 202 - 90101 OULU
Tel.: +358 407 522 412
E-Mail: infofi@radiall.com

Germany - RADIALL GmbH

Carl-Zeiss Str. 10 Postfach 200143
D63307 - RÖDERMARK (Frankfurt)
Tel.: +49 60 74 91 07 0 - Fax: +49 60 74 91 07 70
E-Mail: infode@radiall.com

Italy - RADIALL Elettronica S.R.L.

Via Concordia, 5 - 20090 ASSAGO MILANO
Tel.: +39 02 48 85 121 - Fax: +39 02 48 84 30 18
E-Mail: infoit@radiall.com
Regional office: Roma

Netherlands - RADIALL B.V.

Hogebrinkerweg 15b - 3871 KM HOEVELAKEN
Tel.: +31 33 253 40 09 - Fax: +31 33 253 45 12
E-Mail: infofl@radiall.com

Sweden - RADIALL A.B.

Sjöängsvägen 2 - SE-192 72 SOLLENTUNA (Stockholm)
Tel.: +46 844 434 10 - Fax: +46 875 449 16
E-Mail: infose@radiall.com

U.K. - RADIALL Ltd.

Ground Floor, 6 The Grand Union Office Park,
Packet Boat Lane
UXBRIDGE Middlesex UB8 2GH (London)
Tel.: +44 1895 425 000 - Fax: +44 1895 425 010
E-Mail: infouk@radiall.com

NORTH AMERICA

USA - RADIALL USA, Inc.

6825 West Galveston Street
CHANDLER, Arizona 85226
Tel.: +1 480 682 9400 - Fax: +1 480 682 9403
E-Mail: infousa@radiall.com

ALSO REPRESENTED IN

Australia	Hungary	Poland
Austria	Indonesia	Russia
Belgium	Israel	Singapore
Brazil	Korea	Spain
Czech Republic	Latvia	Switzerland
Denmark	Lithuania	Taiwan
Estonia	Malaysia	Thailand
Greece	Norway	Vietnam
	Philippines	South Africa

For the above countries, please contact the local agent or RADIALL at info@radiall.com

ASIA

China - SHANGHAI RADIALL Electronic Co., Ltd.

N° 390 Yong He Road 200072 - SHANGHAI
Tel.: +86 21 66 52 37 88 - Fax: +86 21 66 52 11 77
E-Mail: infozh@radiall.com

Japan - NIHON RADIALL

Shibuya-ku Ebisu 1-5-2, Kougetsu Bldg 405
TOKYO 150-0013
Tel.: +81 3 3440 6241 - Fax: +81 3 3440 6242
E-Mail: infojp@radiall.com

Hong Kong - RADIALL Electronics Ltd.

Flat D, 6/F, Ford Glory Plaza,
37-39 Wing Hong Street
Cheung Sha Wan
KOWLOON HONG KONG
Tel: +852-2959-3833 - Fax: +852-2959-2636
E-Mail: infohk@radiall.com

India - RADIALL India Pvt. Ltd.

25 D, II Phase, Peenya Industrial Area
BANGALORE 560058
Tel.: +91 80 83 95 271 - Fax: +91 80 83 97 228
E-Mail: infoin@radiall.com

