

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 1/ 19

Titre / Title
HIGH RELIABILITY RF COAXIAL CONNECTORS SMA TYPE, 50 OHMS (MALE CONTACT)

Rédigé par / Written by	Responsabilité / Responsibility	Date	Signature
S. POIZAT	Space Project Manager	27/04/07	
Vérifié par / Verified by			
V EUDELIN	Space B. U. Manager	27/04/07	
Approuvée par / Approved by			
A. BLANCHARD	Space Quality Manager	27/04/07	

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 2 / 19

DOCUMENTATION CHANGE NOTICE

REVISION OR ISSUE	DATE	CHANGE
1 -	28/02/03	Creation – Replacement of specification RAD-C-2612/001 issue 3
1 A	02/07/03	Minor modifications of presentation
1 B	15/11/04	§ 4.4.2 silicone —→ silicone rubber
1C	15/12/04	Table 7- R125053900X, change solder by crimp.
1 D	25/04/05	Added four new references in table 7
1 E	18/05/05	Added the reference R125055702X in Table 7
1 F	24/07/06	Added the reference R125444001X in Table 7
1 G	25/09/06	Added the reference R125852000X in Table 7
2 -	27/04/07	Table 7 replaced by the detail specification RAD-LIS-CONN-001

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 3/ 19

TABLE OF CONTENTS

1. GENERAL	5
1.1 SCOPE	5
1.2 TYPE VARIANTS	5
1.3 MAXIMUM RATINGS	5
1.4 POWER DERATING INFORMATION (FIGURE 1)	5
1.5 PHYSICAL DIMENSIONS	5
1.6 STANDARD TEST CONNECTOR INTERFACE	5
2. APPLICABLE DOCUMENTS	11
3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS	11
4. REQUIREMENTS	11
4.1 GENERAL	11
4.2 DEVIATIONS FROM GENERIC SPECIFICATION	11
4.2.1 Deviations from Special In-Process Controls	11
4.2.2 Deviations from Final production Tests (Chart II)	11
4.2.3 Deviations from Qualification Tests (Chart IV)	11
4.2.4 Deviations from Lot Acceptance Tests (Chart V)	11
4.3 MECHANICAL REQUIREMENTS	11
4.3.1 Dimension Check	11
4.3.2 Weight	12
4.3.3 Coupling Proof Torque	12
4.3.4 Cable Retention Force	12
4.3.5 Mating and Unmating Forces	12
4.3.6 Endurance	12
4.3.7 Residual Magnetism	12
4.3.8 Contact Engagement and Separation Forces	12
4.3.9 Contact Retention	13
4.4 MATERIALS AND FINISHES	13
4.4.1 Gold-plated Versions	13
4.4.2 Passivated Stainless Steel Versions (Not applicable for solder version)	14
4.5 MARKING	15
4.5.1 General	15
4.5.2 The RADIAL Component Number	15
4.5.3 Traceability Information	15
4.5.4 Marking of Small Components	15
4.6 ELECTRICAL MEASUREMENTS	16
4.6.1 Electrical Measurements at Room Temperature	16
4.6.2 Electrical Measurements at High and Low Temperatures (Table 3)	16
4.6.3 Circuits for Electrical Measurements	16
4.7 BURN-IN TEST (TABLES 4 AND 5)	16
4.8 ENVIRONMENTAL AND ENDURANCE TESTS	16
4.8.1 Measurements and Inspections on Completion of Environmental Tests	16
4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests	16
4.8.3 Measurements and Inspections on Completion of Endurance Tests	16
4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)	16
4.8.5 Electrical Circuits for Operating Life Tests	16
4.8.6 Conditions for High Temperature Storage Test (Part of Endurance Testing)	16

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 4/ 19

LIST OF TABLES

<u>Table 1 (a) – TYPE VARIANTS</u>	6
<u>Table 1 (b)- MAXIMUM RATINGS</u>	6
<u>Table 2 – ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE</u>	16
<u>Table 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES</u> (Not applicable)...	16
<u>Tables 4 and 5 – BURN-IN TEST</u> (Not applicable).....	16
<u>Table 6 – MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTS</u>	17
<u>Table 7 - LIST OF PART NUMBERS WITH APPLICABLE POWER HANDLING CATEGORY</u>	19

LIST OF FIGURES

FIGURE 1 – POWER DERATING INFORMATION	7
Figure 1 (a) – Power Versus Frequency	7
Figure 1 (b) – Power Versus Temperature	7
FIGURE 2 – PHYSICAL DIMENSIONS	8
Figure 2 (a) – Connector Interface – Male contact	8
FIGURE 3 – STANDARD TEST CONNECTOR INTERFACE – Female Contact	10
FIGURE 4 – TEST PIN CONFIGURATION	13

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 5/ 19

1. GENERAL

1.1 SCOPE

This specification details the ratings, physical and electrical characteristics, test and inspection data for RF Coaxial connectors, Type SMA, 50 Ohms (Male contact). It shall be read in conjunction with RADIALL Generic Specification RAD-GEN-CONN-001, the requirements of which are supplemented herein.

1.2 TYPE VARIANTS

For each type variant, the full electrical and physical characteristics are given in individual technical data sheet.

1.3 MAXIMUM RATINGS

The maximum ratings, which shall not be exceeded at any time during use or storage, applicable to the connectors specified herein, are as scheduled in Table 1(b).

1.4 POWER DERATING INFORMATION (FIGURE 1)

The power derating information applicable to the connectors specified herein is shown in Figure 1.

1.5 PHYSICAL DIMENSIONS

The physical dimensions of the connectors specified herein are shown in Figure 2(a) and technical data sheet.

1.6 STANDARD TEST CONNECTOR INTERFACE

Whenever gauges are required for mating with the connectors under test, their physical dimensions shall be in accordance with those specified in Figure 3.

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 6 / 19

Table 1 (a) – TYPE VARIANTS

(See RADIAL technical data sheets)

Table 1 (b)- MAXIMUM RATINGS

N°	CHARACTERISTICS	SYMBOL	MAXIMUM RATINGS	UNIT	REMARKS
1	Power	P	See figures 1 (a) and 1 (b)	W	For information
2	Nominal impedance	Z	50	Ω	-
3	Frequency Range	f	See technical data sheet	GHz	-
4	Dielectric Withstanding Voltage at ambient pressure	V _{dw}	See technical data sheet	V _{rms}	At sea level
5	Dielectric Withstanding Voltage at low pressure	V _{lp}	10% of V _{dw}	V _{rms}	At 44 mb
6	Rated Operating Voltage	V _{op}	50% of V _{dw}	V _{rms}	
7	Corona Level	V _{co}	8,5% of V _{dw}	V _{rms}	-
8	Operating Temperature Range	T _{op}	See technical data sheet	°C	-
9	Storage Temperature Range	T _{stg}	As per Operating Temperature Range	°C	-

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 7 / 19

FIGURE 1 - POWER DERATING INFORMATION

FIGURE 1(a) POWER VERSUS FREQUENCY

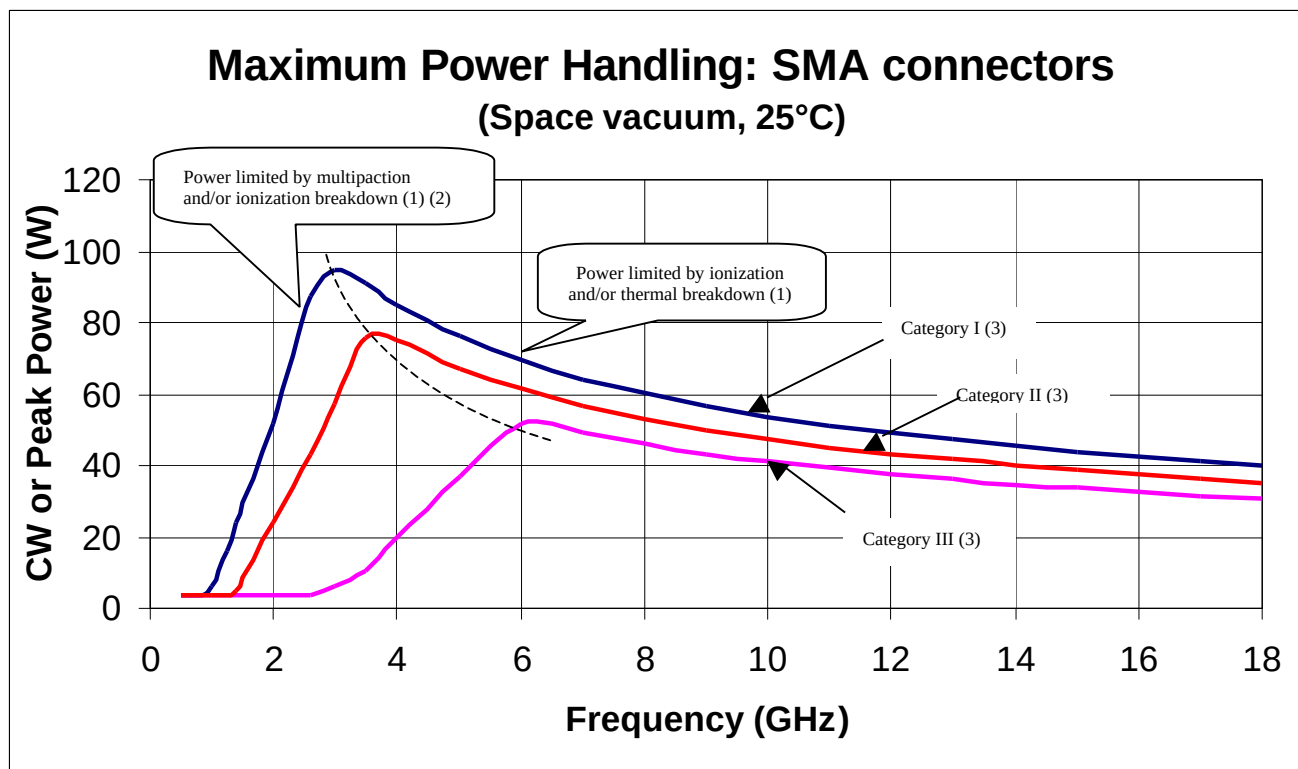


FIGURE 1(b) POWER VERSUS TEMPERATURE


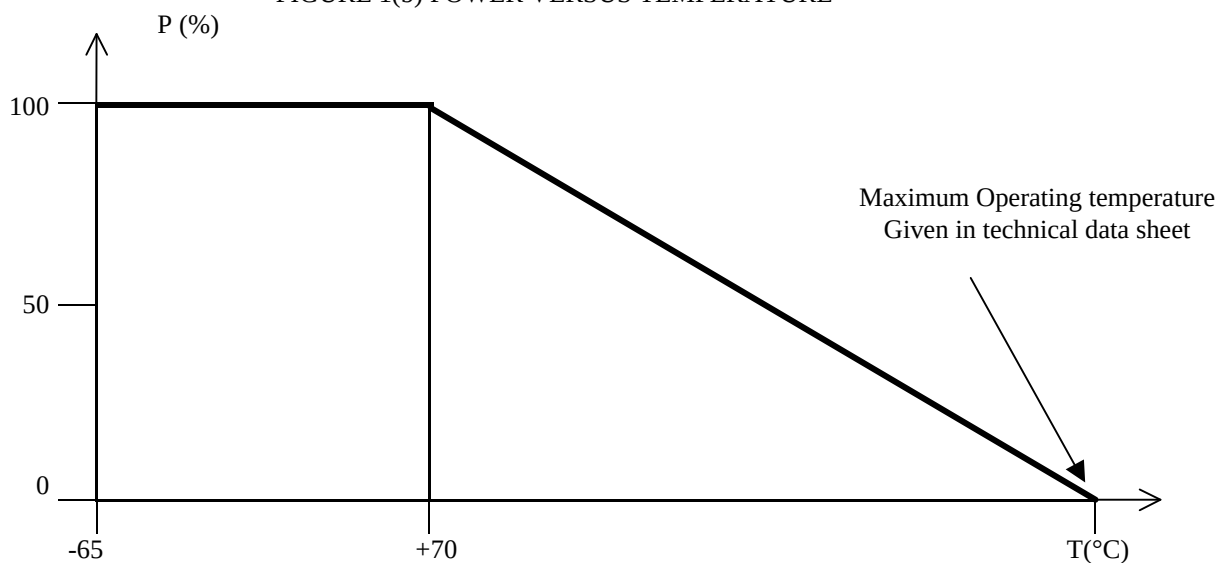


FIGURE 2 - PHYSICAL DIMENSIONS

FIGURE 2(a) CONNECTOR INTERFACE MALE CONTACT

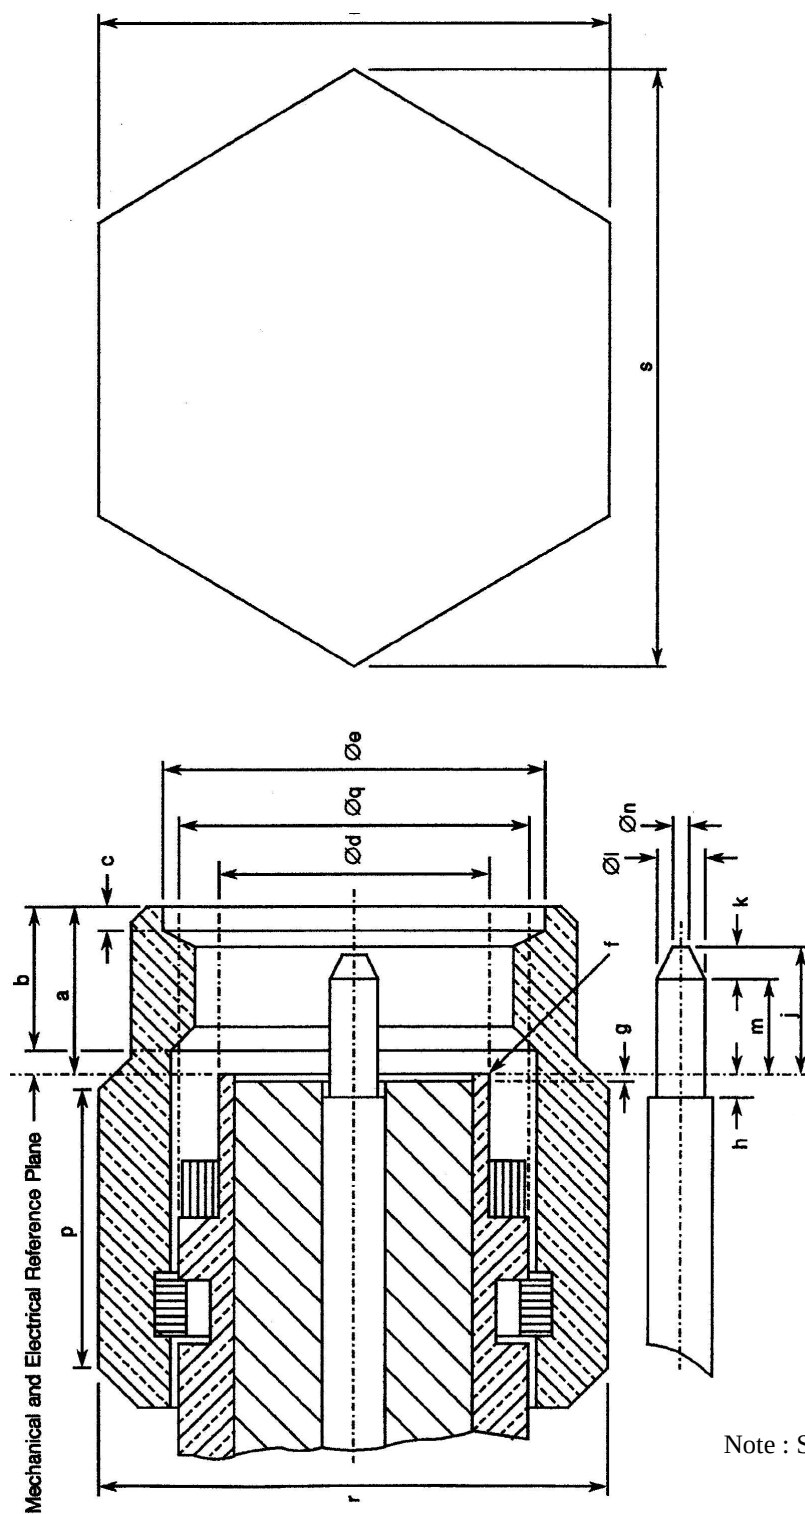

Note : See page 9 for dimension


	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 9/ 19

FIGURE 2 – PHYSICAL DIMENSIONS (CONTINUED)


FIGURE 2(a) – CONNECTOR INTERFACE, MALE CONTACT (CONTINUED)

SYMBOL	MILLIMETRES		NOTES
	MIN.	MAX.	
a	-	3.43	Radius or 45° chamfer
b	2.54	-	
c	0.38	1.14	
Φd	-	4.592	
Φe	6.35	-	
f	-	0.08	
g	0.00	0.20	
h	0.00	0.25	
j	-	2.54	
k	0.38	-	
Φl	0.90	0.94	
m	1.27	-	
Φn	-	0.38	
p	3.17	-	
Φq	¼ 36 UNS 2 B		Hexagonal on flat
r	7.84	8.00	
s	-	9.20	

FIGURE 3 – STANDARD TEST CONNECTOR INTERFACE – FEMALE CONTACT

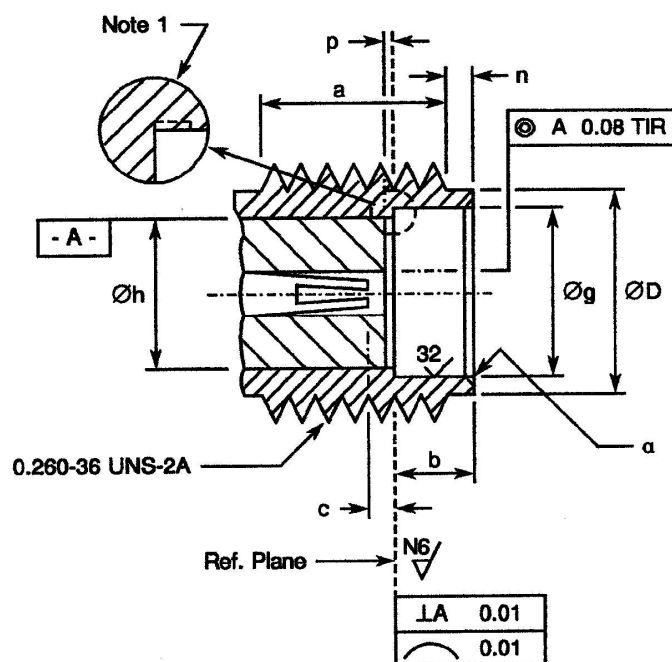

DETAIL OF INNER CONTACT

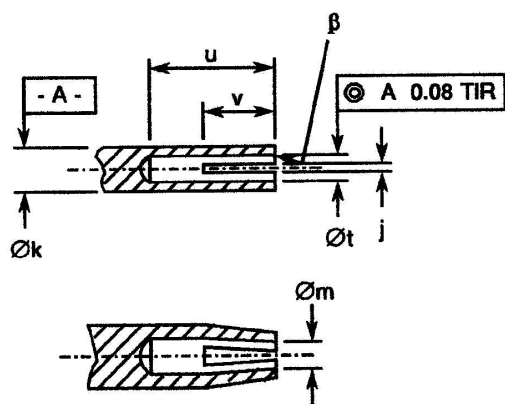

NOTES

1. No fillet permitted. Radiall undercut 0.20 (max.) deep x 0.89 (max.) long permitted

SYMBOL	MILLIMETERS		NOTES
	MIN.	MAX.	
a	3.81	-	Contact recess
b	1.88	1.98	
c	0.00	0.08	
ΦD	5.28	5.49	
Φg	4.60	4.67	2 or more slots
Φh	4.10	4.13	
j	0.13	0.23	
Φk	1.27	1.29	
Φm	0.72	0.84	After closing
n	0.38	1.14	Insert recess
p	0.00	0.05	
u	2.54	-	
Φt	0.94	0.99	
v	1.91	2.41	45° Chamfer
α	-	0.25	
β	0.99	1.19	45° Chamfer

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 11/ 19

2. APPLICABLE DOCUMENTS

The following documents form part of this specification and shall be read in conjunction with it :

- (a) RADIALL Generic Specification RAD-GEN-CONN-001 for RF Coaxial Connectors.
- (b) MIL G.45204 Gold plating Electrodeposited.
- (c) MIL PRF. 39012 Connectors Coaxial RF General Specification for.

3. TERMS, DEFINITIONS, ABBREVIATIONS, SYMBOLS AND UNITS

For the purpose of this specification, the terms, definitions, abbreviations, symbols and units specified in ESA/SCC Basic specification N° 21300 shall apply.

In addition the following shall apply:

V_{dw}	Dielectric Withstanding Voltage at ambient pressure (sea level)
V_{lp}	Dielectric Withstanding Voltage at low pressure (44 mb)
V_{co}	Corona Level Voltage
R_i	Insulation Resistance
I_L	Leakage Current

4. REQUIREMENTS

4.1 GENERAL

The complete requirement for procurement of the connectors specified herein are stated in this specification and RADIALL Generic Specification RAD-GEN-CONN-001 Deviations from the Generic Specification applicable to this specification only, are listed in Para.4.2.

Deviations from the applicable Generic Specification and this Detail Specification do not affect the components' reliability, are listed in the appendices attached to this specification.

4.2 DEVIATIONS FROM GENERIC SPECIFICATION

4.2.1 Deviations from Special In-Process Controls

None.

4.2.2 Deviations from Final production Tests (Chart II)

The tests "Change of temperature", "Insulation Resistance", "Voltage proof" are not applicable for variants delivered with unmounted contact and insulator.

4.2.3 Deviations from Qualification Tests (Chart IV)

None.

4.2.4 Deviations from Lot Acceptance Tests (Chart V)

None.

4.3 MECHANICAL REQUIREMENTS

4.3.1 Dimension Check

The dimensions of the connectors specified herein shall be verified in accordance with the requirements set out in Para.9.25 of RADIALL Generic Specification RAD-GEN-CONN-001 and shall conform to those shown in Figures 2(a) and in technical data sheet.

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 12/ 19

4.3.2 Weight

The maximum weight of the connectors specified herein shall be as specified in technical data sheet.

4.3.3 Coupling Proof Torque

The requirements for testing of the coupling proof torque are specified in Section 9 of RADIALL Generic Specification RAD-GEN-CONN-001. The applied torque shall be 170N.cm.

4.3.4 Cable Retention Force

The requirements for testing of the cable retention force are specified in Section 9 of RADIALL Generic Specification RAD-GEN-CONN-001. The technical data sheet specifies the values for axial loads. Torque shall be applied as follows :

4.3.4.1 Flexible Cables

Flexible cables shall be rotated 180° in both directions.

Rotational movement shall be applied at 15 cm from the connector.

4.3.4.2 Semi-rigid Cables

The torque value shall be as follows:

RG 405/U: 11.28N.cm.

RG 402/U: 38.85N.cm.

RG 401/U: 38.85N.cm.

4.3.5 Mating and Unmating Forces

The applicable measurement requirements are specified in Section 9 of RADIALL Generic Specification RAD-GEN-CONN-001. The maximum torque during mating and unmating shall not exceed 24 N.cm.

Whenever a test is performed on mated pairs of connectors, the pairs shall be torqued at 80-120 N.cm.

4.3.6 Endurance

The applicable test requirements are specified in Section 9 of RADIALL Generic Specification RAD-GEN-CONN-001. The test conditions shall be as follows :

(a) Number of cycles : 500 for qualification ; 100 for lot acceptance

(b) Rate : 12 cycles maximum/minute.

4.3.7 Residual Magnetism

Not applicable.

Residual magnetism is not applicable to stainless steel versions, and Beryllium copper Nickel underplate version.

4.3.8 Contact Engagement and Separation Forces

The requirements for these measurements are specified in Section 9 of RADIALL Generic Specification RAD-GEN-CONN-001 and apply to female contacts only.

(a) Oversize Pin

Steel test pin diameter : 0.9525/0.955 mm.

Insertion depth : 0.76/1.14 mm.

Number of insertions : 3.

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 13/ 19


(b) Engagement Force Test (Maximum diameter Test Pin)

Steel test pin diameter : 0.940/0.942 mm.
Engagement depth : 1.27/1.91 mm.
Engagement force : 1360g max.

(c) Separation Force Test (Minimum Diameter Test Pin)

Steel test pin diameter : 0.902/0.904 mm.
Separation depth : 1.27/1.91 mm.
Separation force : 28.4g min.

FIGURE 4 – TEST PIN CONFIGURATION

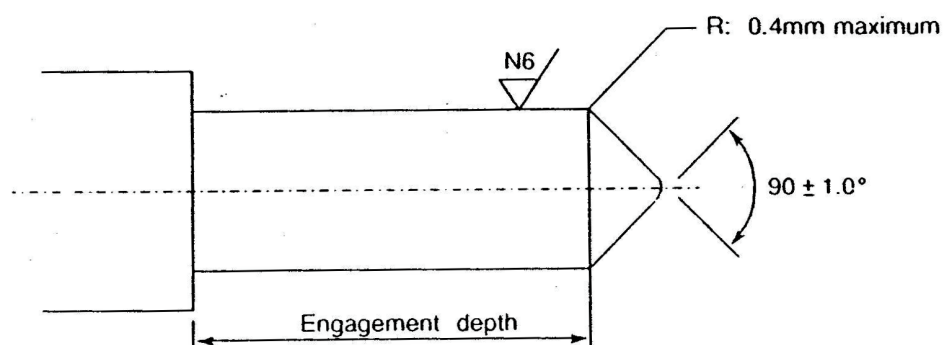

4.3.9 Contact Retention

The requirements for this test are specified in Section 9 of RADIAL Generic Specification RAD-GEN-CONN-001. The test conditions are given in technical data sheet. After testing, the connector interface dimensions shall be within the limits of Figure 2(a).

4.4 MATERIALS AND FINISHES

The material and finishes shall be as specified herein. Where a definite material is not specified, a material which will enable the connectors specified herein to meet the performance requirements of this specification shall be used. Acceptance or approval of any constituent material does not guarantee acceptance of the finished product.

4.4.1 Gold-plated Versions

4.4.4.1 Standard types

(a) Shell, Coupling Nut

Material : Stainless steel
Underplate : Nickel, 2.0 µm minimum
Plating : Gold, 0.5 µm minimum, Type II of MIL-G-45204.

(b) Inserts

Material : PTFE

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 14/ 19

(c) Center contact

Material : Beryllium copper or brass
Underplate : Nickel, 2 µm min.
Plating : Gold 1.27 mini Type II of MIL-G-45204

(d) Gaskets

Material : Silicone rubber

(e) Accessories (ferrule, crimping sleeve and nut) etc...

Material : Brass or copper or stainless steel
Underplate : Nickel, 2.0 µm minimum
Plating : Gold, 0.2 µm minimum Type II of MIL-G-45204

4.4.4.2 Hermetic Types – added permitted material

(a) Shell

Material : Iron
Underplate : Nickel, 2.0 µm minimum
Plating : Gold, 0.5 µm minimum, Type II of MIL-G-45204

(b) Insert

Material : Glass

(c) Centre Contact

Material : Iron
Underplate : Nickel, 2.0 µm minimum
Plating : Gold, 1.27 µm minimum, Type II of MIL-G-45204

4.4.2 Passivated Stainless Steel Versions (Not applicable for solder version)

(a) Shell, Coupling Nut

Material : Amagnetic stainless steel, electro-passivated

(b) Centre Contact

Material : Beryllium copper or brass
Underplate : Nickel, 2.0 µm minimum
Plating : Gold, 1.27 µm minimum, Type II of MIL-G-45204

(c) Inserts

Material : PTFE

(d) Gaskets

Material : Silicone rubber

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 15/ 19

(e) Accessories

- Crimping or soldering elements
 - Material : Brass or copper or stainless steel
 - Underplate : Nickel, 2.0 µm minimum
 - Adequate coating for good solderability
- Nut
 - Material : Amagnetic stainless steel, electro-passivated
- Washers
 - Material : Beryllium copper
 - Plating : Nickel, 2.0 µm minimum

4.5 MARKING

4.5.1 General

The marking of all delivered to this specification shall be in accordance with the following paragraphs. Each component shall be marked in respect of:

- (a) The RADIAL Component Number
- (b) Traceability Information

4.5.2 The RADIAL Component Number

The RADIAL Component Number shall be constituted and marked as follows :

R 125.065.101 X (Example of RADIAL Reference Number)

4.5.3 Traceability Information

Each component shall be marked in respect of traceability information in accordance with the requirements of ESA/SCC Basic Specification N° 21700.

4.5.4 Marking of Small Components

When it is considered that the component is too small to accomodate the marking as specified above, as much as space permits shall be marked. The order of precedence shall be as follows :

- Traceability information
- RADIAL component number

The marking information in full shall accompany each component in its primary package.

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 16/ 19

4.6 ELECTRICAL MEASUREMENTS

4.6.1 Electrical Measurements at Room Temperature

The parameters to be measured in respect of electrical characteristics are scheduled in Table 2. Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}\text{C}$.

4.6.2 Electrical Measurements at High and Low Temperatures (Table 3)

Not applicable.

4.6.3 Circuits for Electrical Measurements

Not applicable.

4.7 BURN-IN TEST (TABLES 4 AND 5)

Not applicable.

Table 2 – ELECTRICAL MEASUREMENTS AT ROOM TEMPERATURE

N°	CHARACTERISTICS	SYMBOL	SPEC.AND/OR TEST METHOD	TEST CONDITIONS	LIMITS		UNIT
					MIN	MAX	
1	Insulation Resistance	Ri	RADIAL RAD-GEN-CONN-001 Para. 9.1	500 Vdc	5000	-	MΩ
2	Dielectric Withstanding Voltage Leakage Current	I _i	RADIAL RAD-GEN-CONN-001 Para. 9.2	Per Dielectric Withstanding Voltage in Technical Data Sheet	-	2.0	mA

Table 3 - ELECTRICAL MEASUREMENTS AT HIGH AND LOW TEMPERATURES (Not applicable)

Not applicable.

Tables 4 and 5 – BURN-IN TEST (Not applicable)

Not applicable.

4.8 ENVIRONMENTAL AND ENDURANCE TESTS

4.8.1 Measurements and Inspections on Completion of Environmental Tests

The parameters to be measured on completion of environmental tests are scheduled in Table 6 of this specification. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}\text{C}$.

4.8.2 Measurements and Inspections at Intermediate Points during Endurance Tests

Not applicable.

4.8.3 Measurements and Inspections on Completion of Endurance Tests

The parameters to be measured on completion of endurance tests are scheduled in Table 6 of this specification. Unless otherwise stated, the measurements shall be performed at $T_{amb} = +22 \pm 3^{\circ}\text{C}$.

4.8.4 Conditions for Operating Life Tests (Part of Endurance Testing)

Not applicable.

4.8.5 Electrical Circuits for Operating Life Tests

Not applicable.

4.8.6 Conditions for High Temperature Storage Test (Part of Endurance Testing)

The requirements for the high temperature storage test are specified in Section 9 of RADIAL Generic Specification RAD-GEN-CONN-001. The conditions for high temperature storage shall be maximum operating temperature as specified in technical data sheet.

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 17/ 19

Table 6 – MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL AND ENDURANCE TESTS

No	RADIAL GENERIC SPÉCIFICATION RAD -GEN-CONN- 001		MEASUREMENTS AND INSPECTION		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL & ENDURANCE TEST (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.	
01	Contact resistance	Para. 9.9	Contact resistance	Centre Contact Shell Hermetic Centre Contact		- - -	3.0 2.0 10	mΩ mΩ mΩ
02	Vibration	Para 9.10	Full Engagement Contact Resistance Visual Examination	Centre Contact .		-	3.0	mΩ
03	Shock or Bump	Para 9.11	Full Engagement Contact Resistance Visual Examination	Centre Contact		-	3.0	mΩ
04	Rapid Change of Temperature	Para 9.12	Contact Resistance Dielect. Withstanding Volt. Leakage Current Visual Examination	Centre Contact Technical Data Sheet	 I ₁	- -	3.0 2.0	mΩ mA
05	Climatic sequence	Para 9.13	Dielect. Withstanding Volt. At Low Pressure (44 mb) Insulation Resistance Dielect. Withstanding Volt. Leakage Current External Visual Inspection	Table 1 (b) After Damp Heat (Within 1 to 24 Hrs recovery) : Table 2 Item 1 Technical Data Sheet RAD-GEN-CONN-001 para. 9.8	No breakdown or flashover R _i I ₁	 5000 2.0	 - 2.0	MΩ mA
06	Cable Retention Force	Para's 9.14 and 4.3.4 of this spec.	Continuity					
07	Coupling Proof Torque	Para 9.4	Interface Dimensions Visual Examination			Figure 2(a)		
08	Marking / Unmating Forces	Para 9.5	Torque	Para. 4.3.5		-	24	N.cm
09	Seal Test	Para 9.7	Hermeticity Leakage External Visual Inspection	If applicable As Applicable RAD-GEN-CONN-001 para. 9.8		- No Bubble	1*10 ⁻⁸	Cm ³ /s
10	Cabling and Crimping Capability	Para 9.15	Visual Examination Dimension Insulation Resistance Dielect. Withstanding Volt. Leakage Current	RAD-GEN-CONN-001 para. 9.15 RAD-GEN-CONN-001 para. 9.15 Table 2 Item 1 Technical Data sheet	 R _i I ₁	 5000 2.0	 - 2.0	MΩ mA
11	VSWR or Reflection Coefficient	Para 9.16	VSWR	RAD-GEN-CONN-001 Para. 9.16		Technical Data Sheet		
12	Corona Level	Para 9.17	Corona	RAD-GEN-CONN-001 Para. 9.17		Table 1 (b)		

Notes:

- The tests in this table refer to either Chart IV or V and shall be used as applicable.

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 18/ 19

**TABLE 6 – MEASUREMENTS AND INSPECTIONS ON COMPLETION OF ENVIRONMENTAL
AND ENDURANCE TESTS**

No	RADIAL GENERIC SPÉCIFICATION RAD -GEN-CONN- 001		MEASUREMENTS AND INSPECTION		SYMBOL	LIMITS		UNIT
	ENVIRONMENTAL & ENDURANCE TEST (1)	TEST METHOD AND CONDITIONS	IDENTIFICATION	CONDITIONS		MIN.	MAX.	
13	Endurance	Para's 9.18 and 4.3.6 of this spec	Mating /Unmating forces Contact resistance Visual examination	Para. 4.3.5 Centre contact Shell Hermetic centre Contact		- - - -	24 4.0 3.0 12	N.cm mΩ mΩ mΩ
14	RF Insertion-Loss	Para.9.19	Insertion Loss	RAD-GEN-CONN-001 Para.9.19		Technical Data Sheet		
15	Corrosion	Para.9.20	Visual examination		No Exposure of Base Metal			
16	Residual Magnetism	Para.9.21	Magnetism					
17	Soldering Proof	Para.9.22	Interface Dimensions Mating / Unmating Forces Insulation resistance Dielect. Withstanding Volt. Leakage Current Contact Resistance External Visual Inspection	Para.4.3.5 Table 2 Item 1 Technical Data sheet Centre contact Shell Hermetic centre Contact	Ri I ₁	Technical Data Sheet - 5000 2.0 - - -		N.cm MΩ mA mΩ mΩ mΩ
18	RF Leakage	Para.9.23	Leakage			Figure 2(b)		
19	High Temperature Storage	Para.9.23 and 4.8.6 of this spec.	Mating / Unmating Forces Insulation resistance Dielect. Withstanding Volt. Leakage Current Contact retention Visual Examination Contact Resistance External Visual Inspection	Para.4.3.5 Table 2 Item 1 Technical Data sheet Para 4.3.9 - Centre contact Shell Hermetic centre Contact RAD-GEN-CONN-001 Para.9.8	Ri I ₁	- 5000 2.0 Para. 4.3.9 - - - - -		N.cm MΩ mA mΩ mΩ mΩ
20	External Visual Inspection	Para.9.8				-	-	
21	Permanence of Marking	Para.9.27				-	-	

Notes:

- The tests in this table refer to either Chart IV or V and shall be used as applicable.

	DETAIL SPECIFICATION		
	REF. : RAD-DET-CONN-002		
	Date: April 27 th , 07	ED/REV: 2 / -	PAGE : 19/ 19

Table 7 - LIST OF PART NUMBERS WITH APPLICABLE POWER HANDLING CATEGORY

See the detail specification RAD-LIS-CONN-001 paragraph 1