



	DETAIL SPECIFICATION		
	REF.: RAD-DET-ATCH-011		
	Date: April 1 st , 19	ED/REV: 2 / D	PAGE: 1 / 11

Titre / Title
RF LOADS FIXED COAXIAL DC – 22 GHz SMP series DETAIL SPECIFICATION

Rédigé par / Written by	Responsabilité / Responsibility	Date	Signature
S. POIZAT	Space Project Manager	01/04/2019	
Vérifié par / Verified by			
V. EUDELIN	Space B. U. Manager	01/04/2019	
Approuvée par / Approved by			
C. DUMORTIER	Space Quality Manager	01/04/2019	

	DETAIL SPECIFICATION		
	REF.: RAD-DET-ATCH-011		
	Date: April 1 st , 19	ED/REV: 2 / D	PAGE: 2/ 11

DOCUMENTATION CHANGE NOTICE

REVISION OR ISSUE	DATE	CHANGE
1/-	30/09/2011	Initial edition
1/A	02/02/2012	Added Anti Rock ring on variant 501 to improve RF leakage performance
2/-	19/09/2012	Added new variant of load: 503: SMP Lock Female Load DC-2GHz
2/A	05/12/2012	Updated the VSWR limit for variant 503
2/B	10/07/2013	Updated the VSWR limit for variants 502-503 (according to RFW 13044 accepted by TAS in July 9 th , 2013)
2/C	01/08/2016	Updated to correct the Table 6: Drift value for VSWR at 5% instead of 2% (to be in accordance with Table 3).
2/D	01/04/2019	Updated with new generic specification (RAD-GEN-ATCH-002), two variants only SMP Load up to 22GHz & SMP-Lock Load up to 22GHz



	DETAIL SPECIFICATION		
	REF.: RAD-DET-ATCH-011		
	Date: April 1 st , 19	ED/REV: 2 / D	PAGE: 3/ 11

TABLE OF CONTENTS

1.	Scope _____	4
2.	Applicable document _____	4
3.	Type variant _____	4
4.	Maximum ratings _____	5
5.	Electrical measurements _____	6
5.1.	High and Low temperature electrical measurements _____	6
6.	Connectors repeatability: _____	6
7.	Operating life _____	6
7.1.	Parameter drift values _____	6
7.2.	Conditions for operating life _____	6
8.	Deviation from the generic specification _____	7
8.1.	Deviation from Shock (Shocks level) _____	7
9.	Mechanical dimension _____	8
9.1.	Dimension for variant 502: _____	8
9.2.	Dimension for variant 503: _____	8
9.3.	Interchangeability for SMP _____	9
9.3.1.	SMP Female: MIL-STD 348a, NOTICE 6, FIGURE 326-1 _____	9

LIST OF TABLES AND FIGURES

Table 1:	Type variants _____	4
Table 2:	Maximum ratings _____	5
Table 3:	Parameter drifts values for Operating Life _____	6
Table 4:	Conditions for Operating Life testing _____	6
Table 5:	Shock level (Variant 502 only) _____	7
Table 6:	Radiall Part Number _____	10
Table 7:	Measurements and inspections on completion of environment and endurance tests _____	10
FIGURE 1 –	Parameter Derating Information _____	5
FIGURE 2 –	Circuit for electrical measurement _____	7

	DETAIL SPECIFICATION		
	REF.: RAD-DET-ATCH-011		
	Date: April 1 st , 19	ED/REV: 2 / D	PAGE: 4/ 11

1. SCOPE

This Detail Technical Sheet details the ratings and electrical characteristics for RF Load Fixed SMP series, 0 -22 GHz

2. APPLICABLE DOCUMENT

The following documents shall be read in conjunction with this specification:

RAD-GEN-ATCH-002: General Specification: Attenuators and Loads RF Fixed Coaxial


3. TYPE VARIANT

Variant of the basic type covered by the relevant Generic Specification are given Table 1.

Table 1: Type variants

VARIANT	VSWR	
	$0 \leq F \leq 12 \text{ GHz}$	$12 \leq F \leq 22 \text{ GHz}$
502	$\leq 1.04 + 0.0135 \times F$	≤ 1.25

VARIANT	VSWR	
	$0 \leq F \leq 12 \text{ GHz}$	$12 \leq F \leq 22 \text{ GHz}$
503	≤ 1.15	≤ 1.25

	DETAIL SPECIFICATION		
	REF.: RAD-DET-ATCH-011		
	Date: April 1 st , 19	ED/REV: 2 / D	PAGE: 5 / 11

4. MAXIMUM RATINGS


Maximum Ratings of the basic type covered by the relevant Generic Specification are given Table 2.


Table 2: Maximum ratings

N°	Characteristics	Symbol	Maximum Rating		Unit
			Min	Max	
1	RF Power	P	-	1	W (1)
2	Peak Power (at 25°) (2)	P _p	-	100	W
3	Operating Temperature Range	T _{op}	-55	+125	°C
4	Storage Temperature Range	T _{stg}	-55	+125	°C
5	Frequency Range	F	0	22	GHz
6	Impedance	Z	47.5	52.5	Ohms
7	RF Leakage	E	See note (3)	-	dBi

- NOTES:**
- (1) See Figure 1.
 - (2) Duration 1µs, cyclic rate 1ms
 - (3) For variant 502: ≥ -60dBi from DC to 12GHz, ≥ -50dBi 12 to 16GHz, ≥ -45dBi 16 to 22GHz
For variant 503: ≥ -90dBi (requirement to use a SMP-L Male receptacle)

FIGURE 1 – Parameter Derating Information

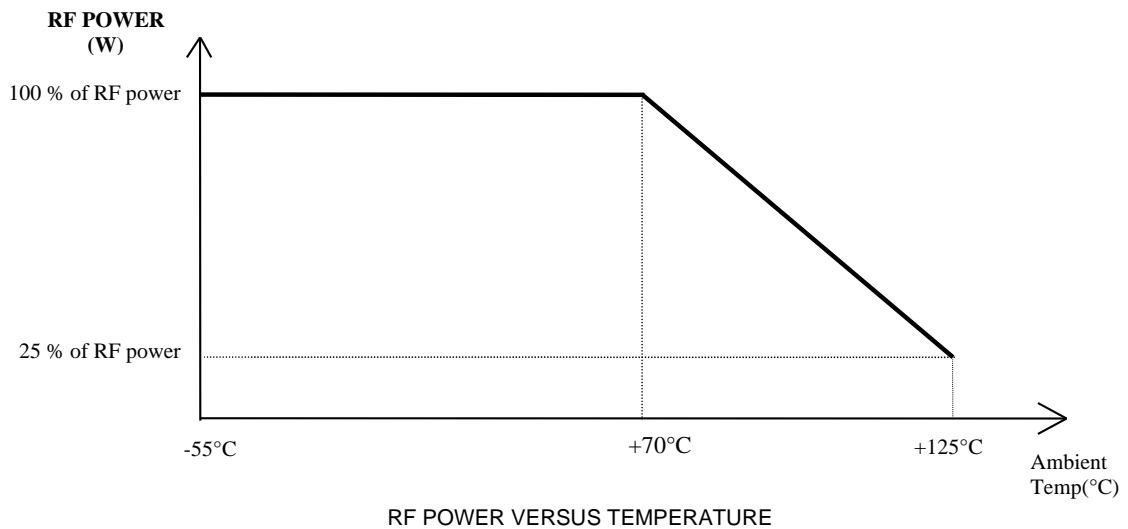

	DETAIL SPECIFICATION		
	REF.: RAD-DET-ATCH-011		
	Date: April 1 st , 19	ED/REV: 2 / D	PAGE: 6/ 11

5. ELECTRICAL MEASUREMENTS

The parameters to be measured at room temperature are scheduled in Table 1. Unless otherwise specified, the measurements shall be performed at $T_{amb} = +22 \pm 3$ °C.

The measurement shall be performed with five points of frequency:

Variants 502 & 503: 2GHz – 8GHz – 12.4GHz and 22GHz

5.1. HIGH AND LOW TEMPERATURE ELECTRICAL MEASUREMENTS

Characteristics	Symbol	Test Method and Conditions (Note 1)	Maximum Rating		Unit
			Min	Max	
Temperature coefficient of Resistance	TC_R	DC test reference temperature	-	3×10^{-4}	$\Omega/\Omega/^\circ\text{C}$

Note 1: Measurements shall be performed during LAT or Qualification test

6. CONNECTORS REPEATABILITY:

Not applicable for loads.

7. OPERATING LIFE

7.1. PARAMETER DRIFT VALUES

The parameter drift values applicable to burn-in are specified in Table 3 of this specification. Unless otherwise stated, measurements shall be performed at $T_{amb} = +22 \pm 3$ °C. The parameter drift value (Δ) applicable to the parameters scheduled, shall not be exceeded. In addition to these drift value requirements for a given parameter, the appropriate limit value specified in Table 1 shall not be exceeded.

7.2. CONDITIONS FOR OPERATING LIFE

The condition for operating life is given in Table 4. After test, a visual inspection shall be performed and no damage shall be appeared.

Table 3: Parameter drifts values for Operating Life

N°	Characteristics	Symbol	Test condition	Limits	Unit
1	Resistance change	ΔR	As per Table 1	250	m Ω
2	VSWR change	$\frac{\Delta VSWR}{VSWR}$	As per Table 1	± 5	%

Table 4: Conditions for Operating Life testing

N°	Characteristics	Symbol	Limits	Unit	Note
1	RF Power	P_{in}	1	W	-
2	Frequency	F	DC ⁽¹⁾ or 10	GHz	-
3	Ambient Temperature	T_{amb}	+25	°C	-

NOTES: (1) The dissipated power at DC or in frequency is the same.
For variant 502 & 503, uses only DC


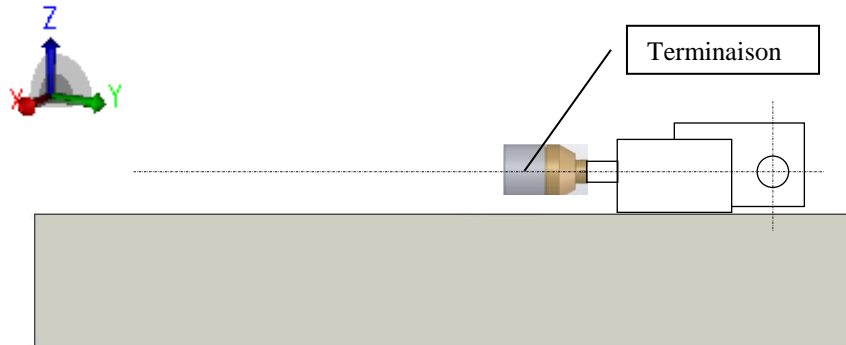
	DETAIL SPECIFICATION	
	REF.: RAD-DET-ATCH-011	
	Date: April 1 st , 19	ED/REV: 2 / D

FIGURE 2 – Circuit for electrical measurement



Schematic for Vibration and Shock test


8. DEVIATION FROM THE GENERIC SPECIFICATION

8.1. DEVIATION FROM SHOCK (SHOCKS LEVEL)

The Shock level for Variant 502 is given by Table 5



Table 5: *Shock level (Variant 502 only)*

All axis	
Frequency	Shock Response spectrum (g) / Q=10
100 Hz	70 g
3 000 Hz	1 200 g
10 000 Hz	1 200 g
Number of events: 3 shocks per axis	
Min tolerances: 0dB within (100Hz – 10000Hz)	

	DETAIL SPECIFICATION		
	REF.: RAD-DET-ATCH-011		
	Date: April 1 st , 19	ED/REV: 2 / D	PAGE: 8 / 11

9. MECHANICAL DIMENSION



9.1. DIMENSION FOR VARIANT 502:

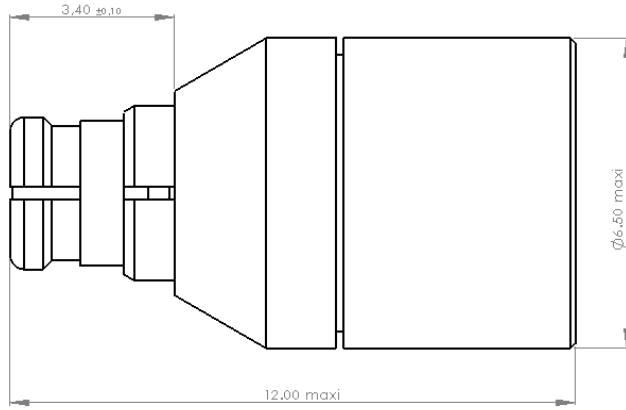

All dimensions are in millimeters (mm)


Connector: SMP Female per MIL-STD 348a, notice 6, figure 326-1
 Weight: ≤ 2.5 grams

9.2. DIMENSION FOR VARIANT 503:

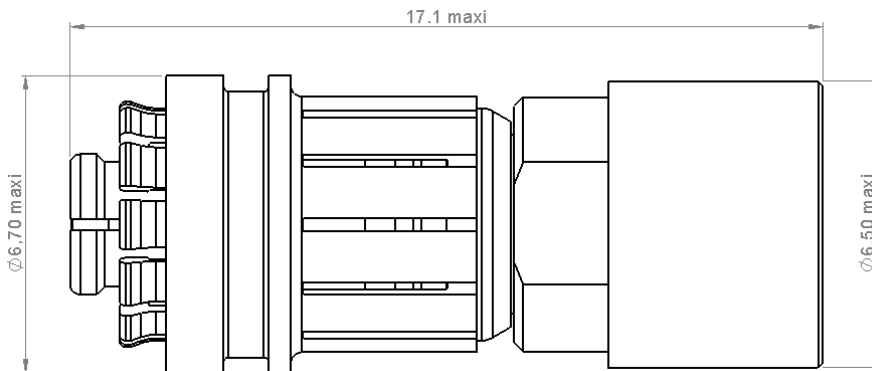


All dimensions are in millimeters (mm)

Connector: SMP Lock Female interface per MIL-STD 348a, notice 6, figure 326-1
 Weight: ≤ 3.20 grams

	DETAIL SPECIFICATION		
	REF.: RAD-DET-ATCH-011		
	Date: April 1 st , 19	ED/REV: 2 / D	PAGE: 9 / 11

9.3. INTERCHANGEABILITY FOR SMP

9.3.1. SMP Female: MIL-STD 348a, NOTICE 6, FIGURE 326-1

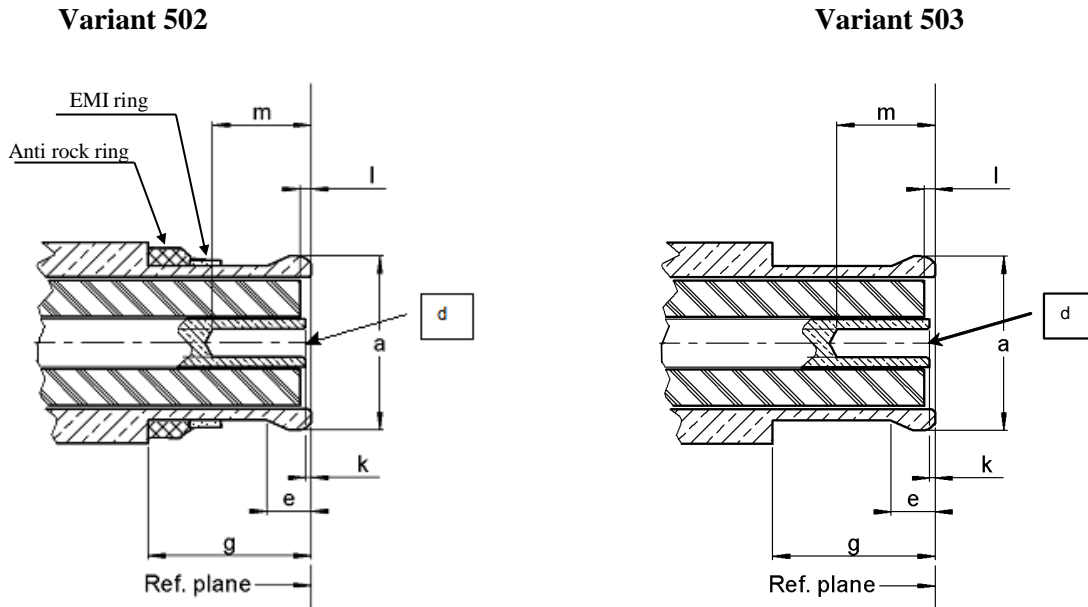

	MIL-STD-348A				Comments
	Inch (original)		mm		
	mini.	maxi.	mini.	maxi.	
a	-	0.135	-	3.43	Dia, opened slots
d	-	-	-	-	Dia, Accept 0,015 +/-0,001 (inch) dia pin
e	0.018	0.025	0.46	0.64	Uncabled connector
g	0.112	-	2.84	-	
k	0.000	0.008	0.00	0.20	Contact recession
l	0.000	-	0.00	-	Dielectric recession
m	0.070	-	1.78	-	


	DETAIL SPECIFICATION		
	REF.: RAD-DET-ATCH-011		
	Date: April 1 st , 19	ED/REV: 2 / D	PAGE: 10/ 11

Table 6: Radiall Part Number

Variant	Radiall Reference	Designation
502	R404262660	RF fixed load SMP DC - 22GHz
503	R4042L9660	RF fixed load SMP Lock DC - 22GHz


	DETAIL SPECIFICATION		
	REF.: RAD-DET-ATCH-011		
	Date: April 1 st , 19	ED/REV: 2 / D	PAGE: 11 / 11

Table 7: Measurements and inspections on completion of environment and endurance tests

N°	Radiall Generic Spec. RAD-GEN-ATCH-002		Measurements and Inspections		Symbol	Limits		Unit
	Environmental and Endurance Test (1)	Test Method and Conditions	Identification	Conditions		Min	Max	
01	Vibration	Para. 13.2.6 of Generic specification and figure 2 of this specification	Initial measurements Impedance VSWR During Last Cycle Intermittent contact Final measurement Visual Examination Resistance change VSWR change	Table 2 Table 1 >0.5ms No open or short circuits No damage Table 3 Table 3	Z VSWR - - ΔR ΔVSWR	Record values Record values - - -2 250 +2	Ω - - mΩ %	
02	Shock	Para 13.2.7 of Generic specification, figure 2 & Para 8.1 of this specification	Initial measurements Impedance VSWR Final measurement Visual Examination Resistance change VSWR change	Table 2 Table 1 No damage Table 3 Table 3	Z VSWR - ΔR ΔVSWR	Record values Record values - - -2 250 +2	Ω - mΩ %	
03	Rapid Change of Temperature	Para 13.2.8 of Generic specification	Initial measurements Impedance VSWR Final measurement Visual Examination Resistance change VSWR change	Table 2 Table 1 After recovery time of 24±2hrs No damage Table 3 Table 3	Z VSWR - ΔR ΔVSWR	Record values Record values - - -2 250 +2	Ω - mΩ %	
04	Climatic sequence	Para 13.2.9 of Generic specification Dry heat: para 13.2.9.1 of Generic specification Cold heat: para 13.2.9.3 of Generic specification	Resistance drift (2) Resistance drift (2) Final measurement Visual Examination Resistance change VSWR change	At +125°C, At -55°C, After recovery time between 1 hr and 24 hrs No damage Table 3 Table 3	TC _R TC _R - ΔR ΔVSWR	3.10 ⁻⁴ 3.10 ⁻⁴ - -2 250 +2	Ω/Ω/°C Ω/Ω/°C - mΩ %	
05	Coupling proof torque	Para 13.2.10 of Generic specification	Interface dimensions	Para 13.2.11	-	Figure of para 13.2.11		-
06	Mating and unmating forces	Para 13.2.11 of Generic specification	Torque	Para 13.2.11	-	-	24	N.cm
07	Operating Life	Para 13.2.12 of Generic specification and table 3 and 4 of this specification	Initial measurements Impedance VSWR Final measurement Visual Examination Resistance change VSWR change	Table 2 Table 1 No damage Table 3 Table 3	Z VSWR - ΔR ΔVSWR	Record values Record values - - -2 250 +2	Ω - mΩ %	
08	RF leakage	Para 13.2.13 of Generic specification	RF leakage	Table 2	E	-	-90	dBi
09	Peak power	Para 13.2.14 of Generic specification and table 2 of this specification	Final measurement Impedance	Table 2	Z	Table 1		
10	Permanence of marking	Para 13.2.16 of Generic specification	Final measurement Visual Examination	No corrosion or obliteration of marking	-	-		-

Notes:

- (1) The tests in this table refer to either paragraph 11 and 12 of Generic specification and shall be used as applicable
- (2) Measurement to be made on 2 samples only.