




ISOMETRIC VIEW

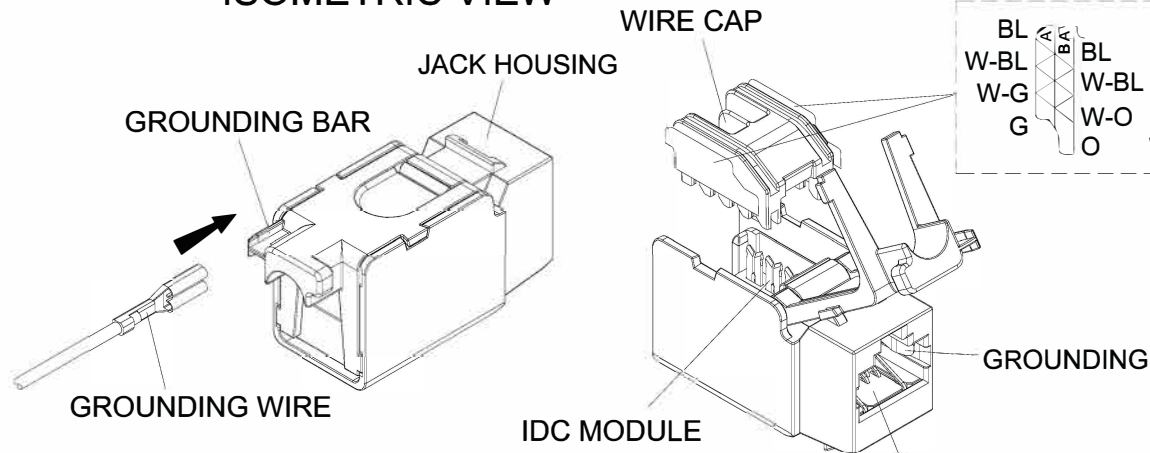

ASSEMBLY DIMENSION

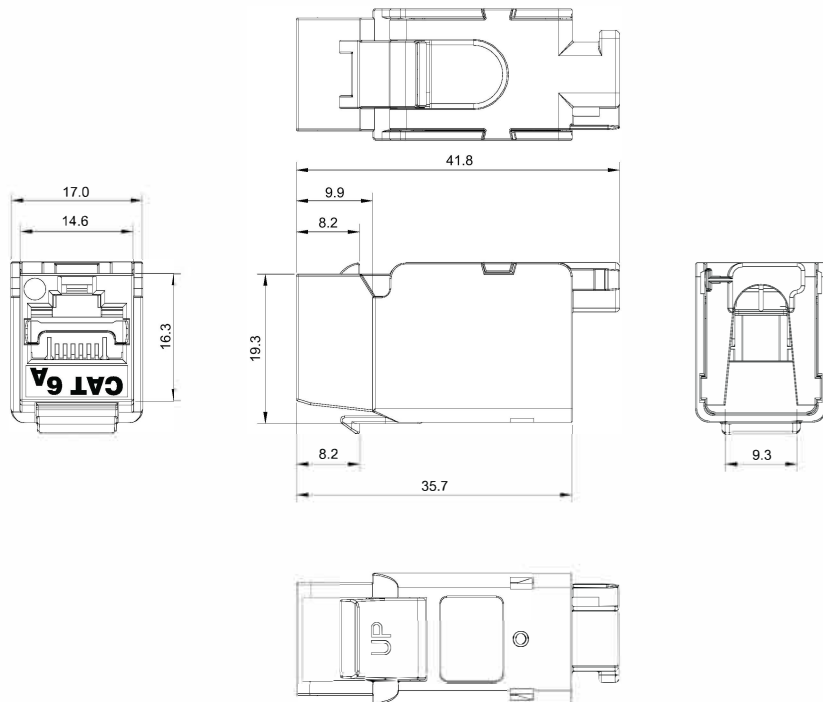

D WIRING LABEL

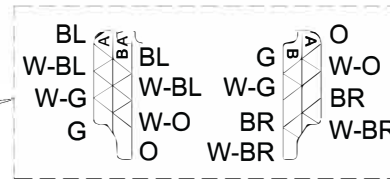

R280HOME01

TRANSMISSION PERFORMANCE

MEET ALL REQUIREMENTS SPECIFIED IN CONNECTING

HARDWARE REQUIREMENT OF:

ISO/IEC 11801-1, CATEGORY 6A

IEC 60603-7-51

ANSI/TIA-568-2.D, CATEGORY 6A

ELECTRICAL

ELECTRICAL INSULATION RESISTANCE : 500 MΩ

MIN. @ 100V D.C

DIELECTRIC WITHSTANDING VOLTAGE : 1000V D.C. OR

A.C. PEAK CONTACT TO CONTACT @ 60HZ FOR 1

MINUTE, 1500V D.C. OR A.C. PEAK CONTACT TO PANEL

@ 60HZ FOR 1 MINUTE

MECHANICAL

INSERTION / EXTRACTION LIFE : 750 CYCLES MINIMUM

IDC WIRE GAUGE : 22 ~ 24 AWG

PHYSICAL

HOUSING : ZINC-ALLOY FULLY SHIELDED

SPRING WIRE : PHOSPHOR BRONZE ALLOY PLATED WITH

50 MICRO-INCH OF GOLD

IDC : PHOSPHOR BRONZE ALLOY WITH 100

MICRO-INCH 100% SN ALLOY

COMPONENTS

6	WIRING LABEL	2
5	GROUNDING	1
4	IDC MODULE	1
3	WIRE CAP	1
2	INSERT MODULE	1
1	JACK HOUSING	1
ITEM	PART NAME	Q'TY

UNLESS OTHERWISE SPECIFIED: TOLERANCES			PROJECT ID		TITLE STP Toolless Jack metal home					
INCH	MM	ANGULAR	FILE	DATE						
.X ± .016	.X ± 0.2	X ± 1°	Z3013.dwg	12/18/09						
.XX ± .008	.XX ± 0.1	.X ± .5°	DRAWN	Sam						
.XXX ± .004			CHECK							
MATERIAL			DRAWN							
SURFACE			CHECK							
FINISH			APPROVED							
					SIZE	DRAWING NUMBER		PART NUMBER		REV
					A4	Z3013				D
					SCALE		UNIT	mm	SHEET	1 of 1