



ISOMETRIC VIEW

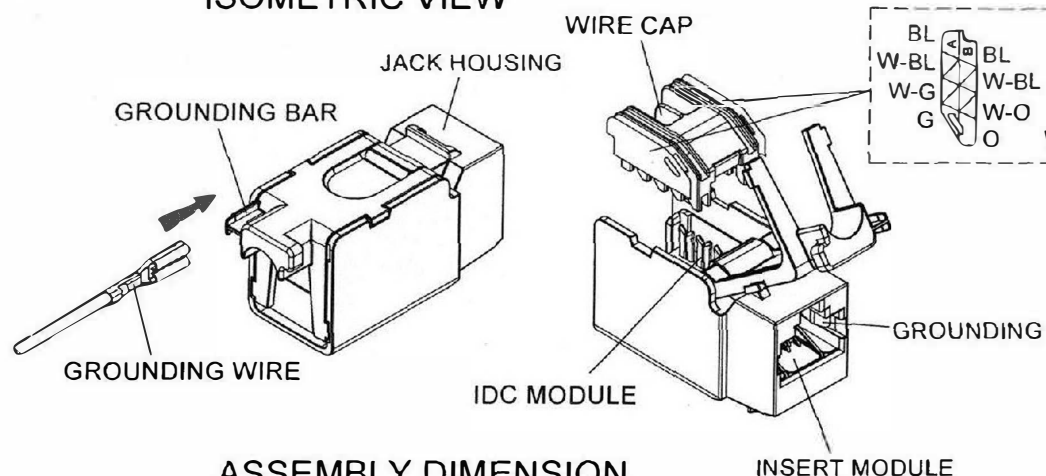

WIRING LABEL

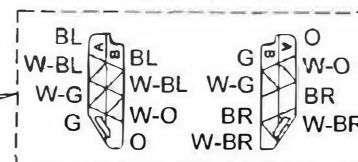


TRANSMISSION PERFORMANCE
Meet all requirements specified in connecting hardware requirement of:
Draft ISO/IEC 11801 amendment 2, Category 6A
Draft ISO/IEC 60603-7-51
ANSI/TIA-568-C.2, Category 6A

ELECTRICAL
Electrical Insulation Resistance: 500 MΩ
min. @ 100V d.c.
Dielectric Withstanding Voltage: 1000V d.c. or
a.c. Peak Contact to Contact @ 60Hz for 1
minute, 1500V d.c. or a.c. Peak Contact to Panel
@ 60Hz for 1 minute

MECHANICAL
Insertion / Extraction Life: 750 Cycles Minimum
IDC Wire Gauge: 22 ~ 26 AWG

PHYSICAL
Housing: Zinc-Alloy Fully Shielded
Spring Wire: Phosphor Bronze Alloy Plated with
50 micro-inch of Gold
IDC: Phosphore Bronze Alloy with 100
micro-inch 100% Sn Alloy

ASSEMBLY DIMENSION

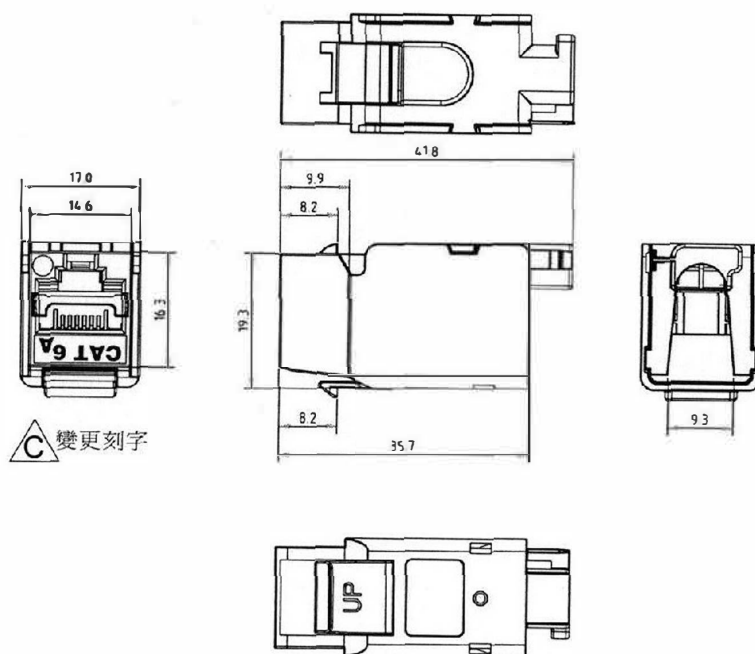

COMPONENTS		
6	WIRING LABEL	2
5	GROUNDING	1
4	IDC MODULE	1
3	WIRE CAP	1
2	INSERT MODULE	1
1	JACK HOUSING	1
ITEM	PART NAME	Q'TY

 變更刻字

UNLESS OTHERWISE SPECIFIED: TOLERANCES			PROJECT ID		TITLE R280MOD810A STP Cat. 6A Tool less Keystone Jack		
INCH	MM	ANGULAR	FIG	DATE			
X ± .016 XXX ± .004	X ± 0.2 XXX ± 0.1	X ± 1° X ± .5°	DRAWN Al Chu	2/9/17	SIZE A4	DRAWING NUMBER	PART NUMBER
SURFACE	CHECK		APPROVED		SCALE 1:1	UNIT mm	SHEET 1 OF 1
FINISH							