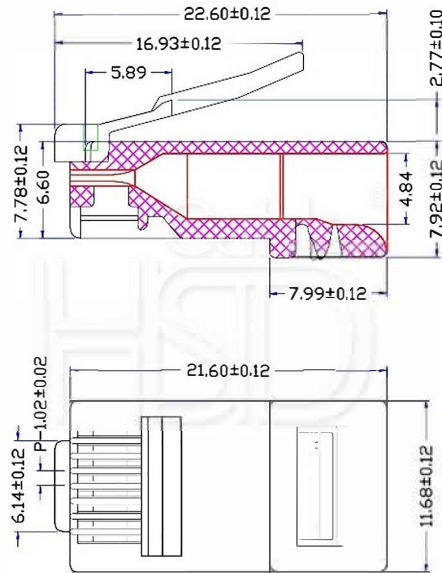



FEATURES:

1 Electrical Test:

- A. 250V AC max at 2 amps.
- B. Dielectric with standing 500volts AC.
- C. Insulation Resistance: 500 megaohms.
- D. Termination Resistance: 35megaohms.

2 Mechanical:

- A. Cable-to-Plug tensile strength-20LBs (89N) min.
- B. Durability: 500 mating cycles.
- C. gold plating(□50)

3 Packing:

Packed 24pcs inside a Clear Plastic
Case 100x75x21mm with black bottom.

* Compatible for wires with maximum conductor size
(including Jacket) of 1.1mm in diameter.



UNLESS OTHERWISE SPECIFIED: TOLERANCES			PROJECT ID		R280MOD836A		
INCH	MM	ANGULAR	FILE	DATE	TITLE		
X ± .016	X ± 0.2	X ± 1°			CAT. 6 UTP Easy-In		
XX ± .008	XX ± 0.1	XX ± .5°			8P8C PLUGS		
XXX ± .004							
MATERIAL			DRAWN		SIZE		
			AI Chu		PART NUMBER		REV
SURFACE			CHECK		A4		A
FINISH			APPROVED		SCALE		
					1:1	UNIT: mm	SHEET 1 OF 1