
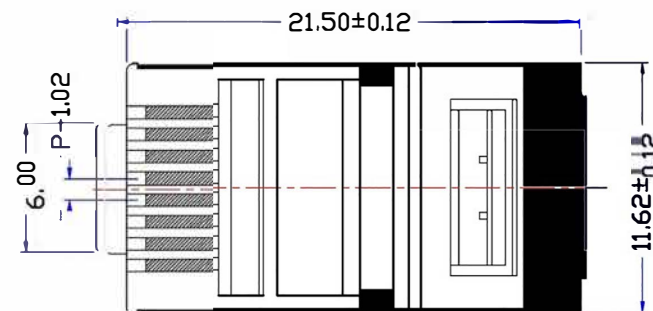
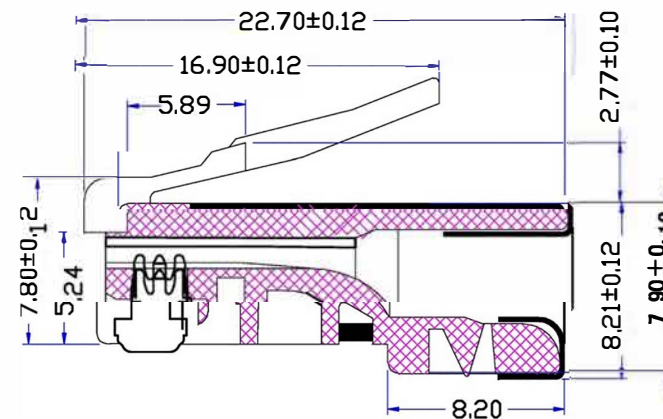
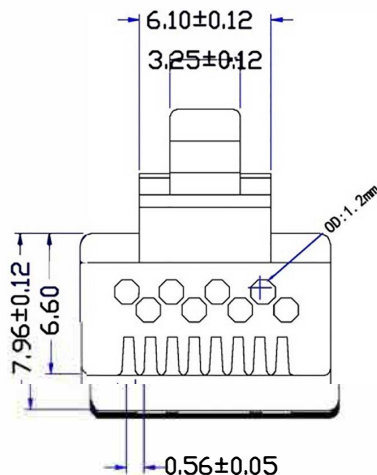


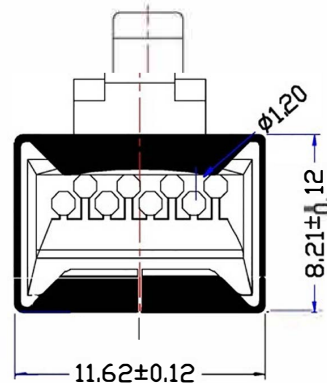

FEATURES:

1 Electrical Test:

- A. 250V ac max, at 2A.
- B. Dielectric with standing 1000V/DC/min, <0.5
- C. Insulation Resistance: >500M Ω , 1000V./min
- D. Contact Resistance: <20M Ω

2 Mechanical:

- A. Cable-to-Plug tensile strength-20LBs (89N) min.
- B. Durability: 750 mating cycles.
- C. Gold plating 50u"

3. Packing:

Packed 24 pcs. in a Clear plastic box with Black bottom

* 23-26 AWG

RADIAL P/N: R280MOD840
Easy install plug Cat.6A FTP(AWG23-26)

RoHS

UNLESS OTHERWISE SPECIFIED:			PROJECT ID	
TOLERANCES				
INCH	MM	ANGULAR	FILE	DATE
.XX ± .015	.XX ± 0.2	X ± 1°		
.XXX ± .008	.XX ± 0.1	.X ± .5°		
.XXX ± .004				
MATERIAL	DRAWN		AI Chu	
SURFACE	CHECK			
FINISH	APPROVED			
SIZE	PART NUMBER	REV		
A4		A		
SCALE	1:1	UNIT	mm	SHEET 1 OF 1