


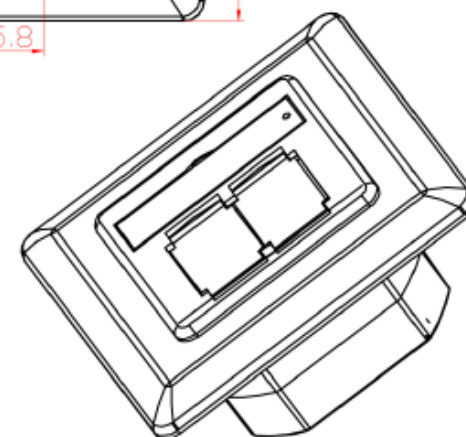
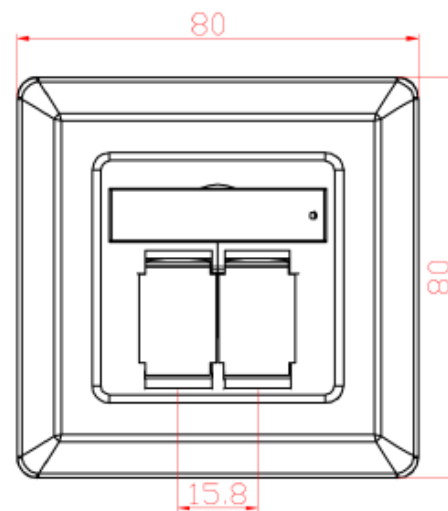


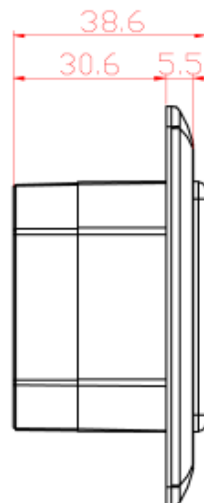

Radiall™

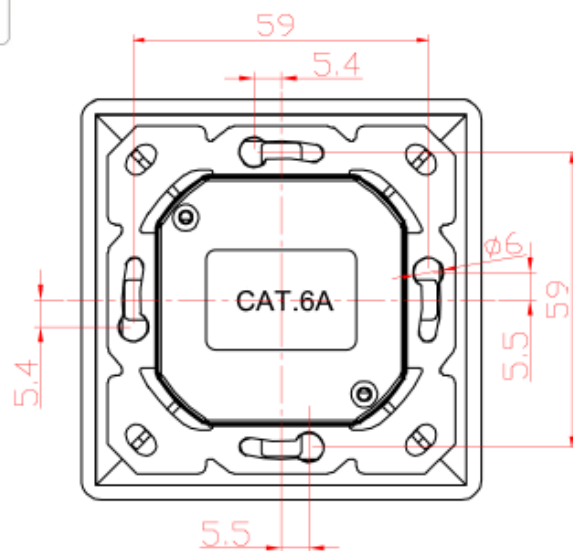

NOTES:

ELECTRICAL:

1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° ~ +85°
2. OPERATION:0° ~ 70°

MECHANICAL:

1. PANEL FRAME:ZINC ALLOY
2. MOLDED CASE:ABS
3. IDC MATERIAL:PC , CONTACT:PHOSPHOR BRONZE WITH NICKEL PATING
4. RJ45 JACK:CONTACT GOLD PLATED,LIFE 750 TIMES MIN
5. IDC LIFE:200 TIMES MIN
6. WIRE:AWG 23-26

REV.	DESCRIPTION	APPVL. BY	DATE	ECN NO.
A	RELEASE	KUNG	2017/11/17	
B				
C				

DRAW	KU	APPVL	KUNG	UNIT	mm	TOLERANCE .x ±0.10 .xx ±0.05 .xxx ±0.03 .xxxx ±0.01 ANGULA ±1°		R280MODUAE	TITLE	CAT6A FULL SHIELDED GERMAN FACE PLATE,WHITE.	SHEET A
CHECK				SCALE	1:1					DWG NO.	VERSION