


Series  
MPX

ENVIRONMENTAL SIZE 8 CRIMP SOCKET COAX CONTACT 50Ω  
FOR ASNE0690 WL CABLE (75Ω)

Issue:  
Sept. 17, 2024

Page  
1/1

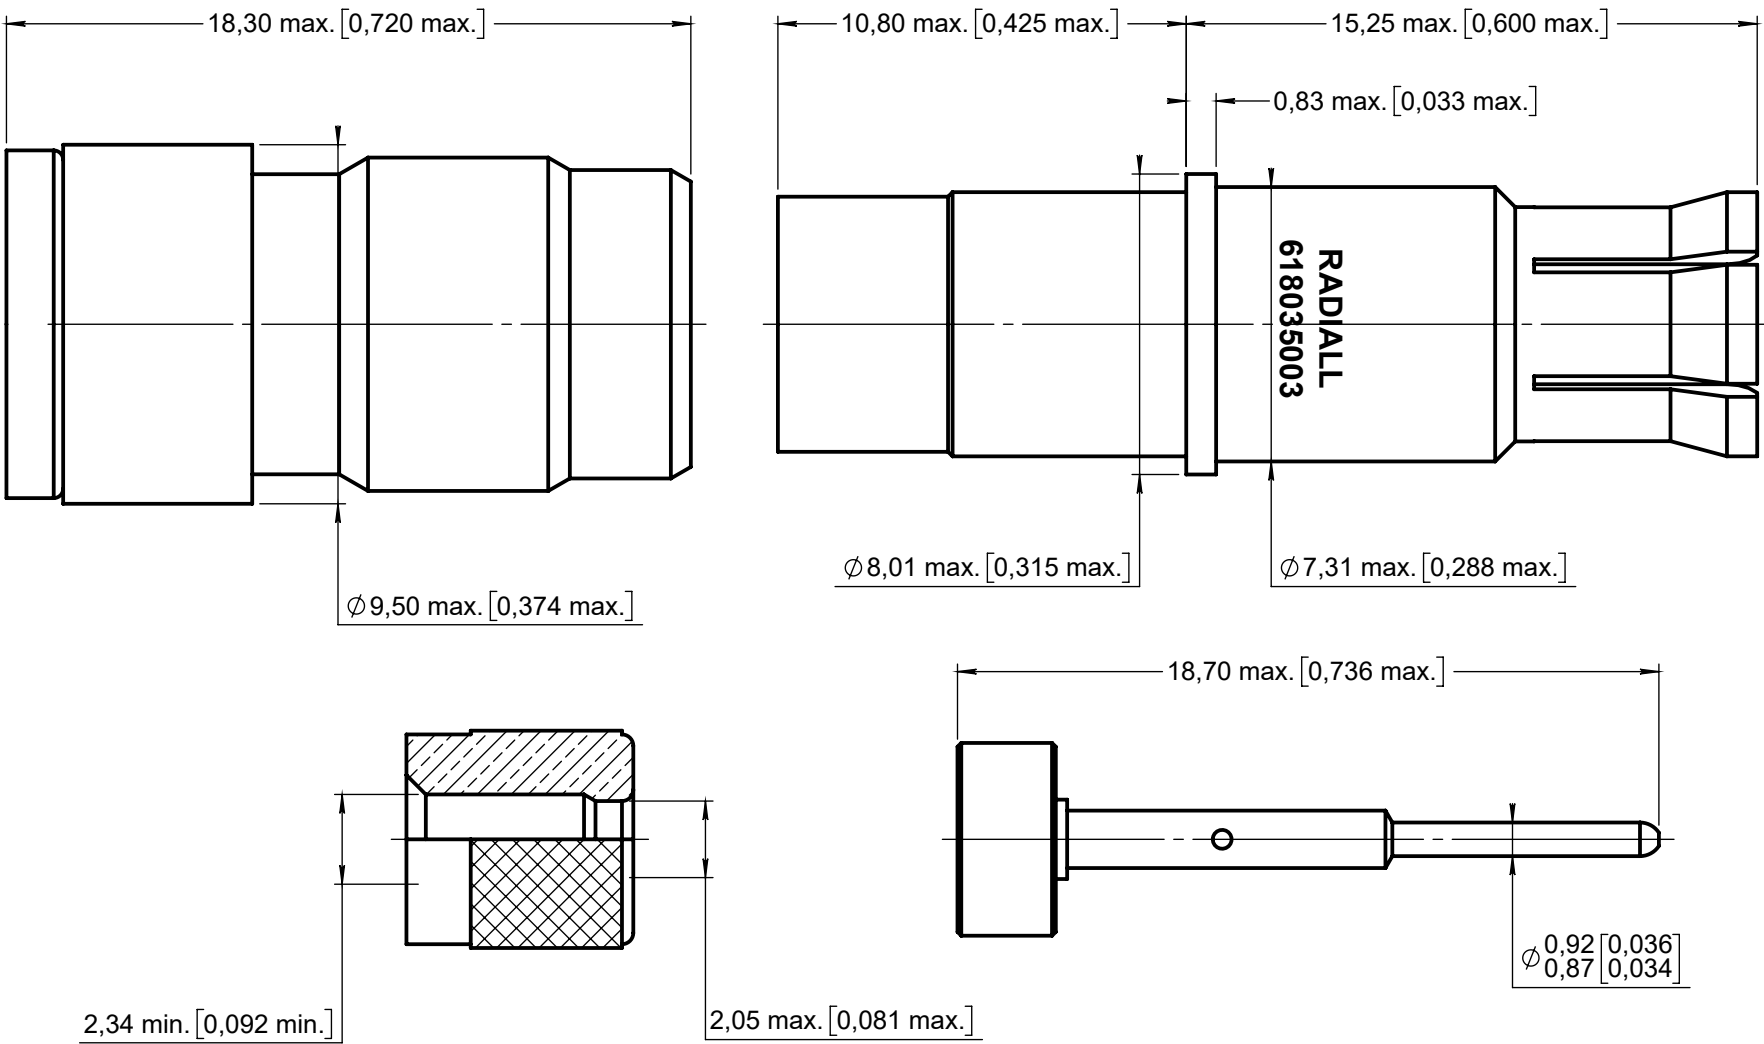

**MATERIALS:**

- FERRULE, OUTER AND CENTER CONTACTS : COPPER ALLOY
- DIELECTRIC : THERMOPLASTIC
- SEALING BOOT : THERMOPLASTIC AND SILICONE ELASTOMER

**FINISHES:**

- FERRULE, OUTER AND CENTER CONTACTS : GOLD OVER NICKEL PLATED

**TOOLING: TO BE CONFIRMED**


- CENTER CONTACT : CRIMPING TOOL M22520/2-01 (RADIAL 282281)  
SELECTOR ON 5  
POSITIONNER : RADIAL 282572
- FERRULE : CRIMPING TOOL M22520/5-01 (RADIAL 282293)  
DIE M22520/5-45 (RADIAL 282236)  
HEX A 5,90 (.232) ON FLATS

**EXTRACTION TOOL:**

- M81969/28-03 RADIAL 282549001

**WIRING INSTRUCTIONS:** SEE MICT0100053

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 5,50 g

**CREATION**

PEN: 23007241-10E

NOM: BRANJONNEAU V.

DATE: Aug. 29, 2023

APPR.: LEGENDRE T.

Sept. 17, 24	"Product not qualified" deleted	LEGEAY H.	BRANJONNEAU V.
Apr. 05, 24	Wiring instructions updated	BRANJONNEAU V.	LEGENDRE T.
Issue	Revisions	Name	Approved

618035003EN

RADIAL PROPRIETARY INFORMATION

This document contains proprietary information and such information shall not be disclosed to any third party for any purpose whatsoever or used for manufacturing purposes without prior written agreement from RADIAL.  
This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112\_9311