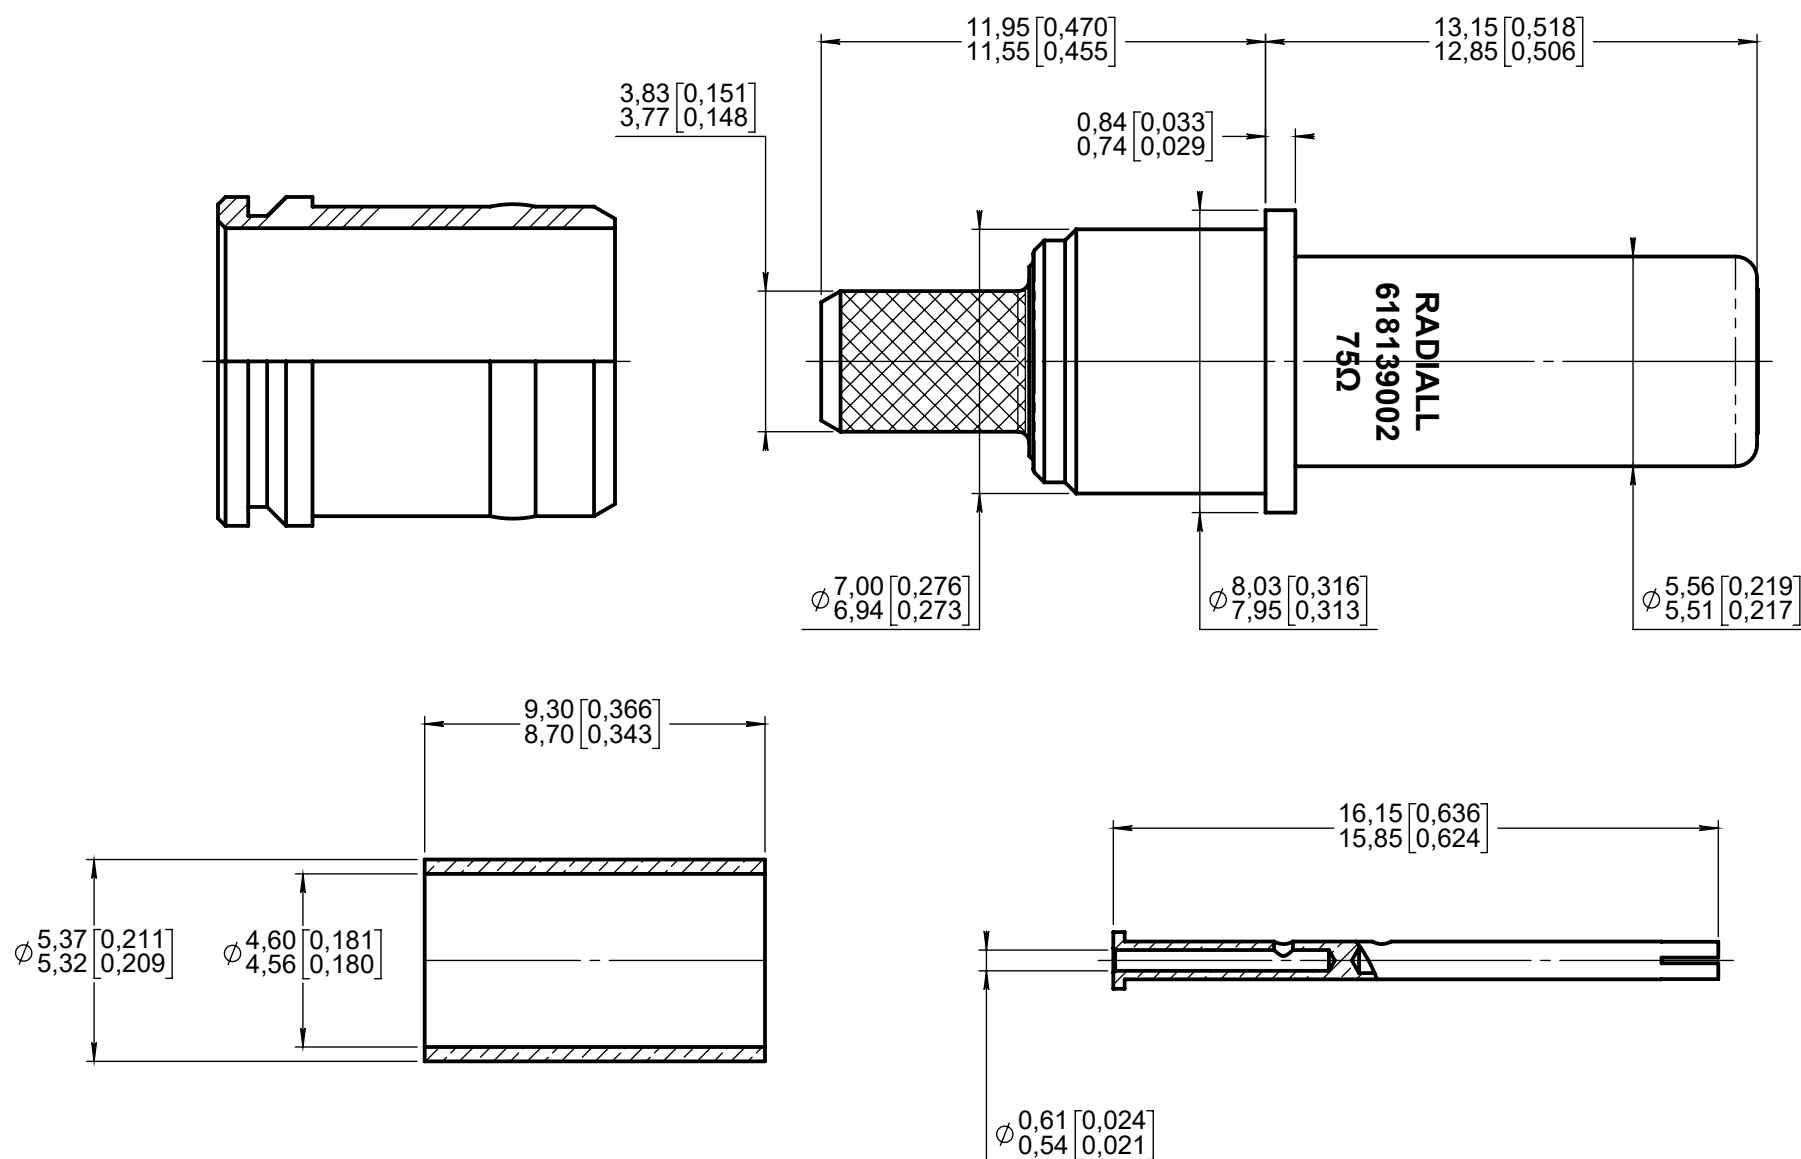


Series
MPXNON-ENVIRONMENTAL SIZE 8 CRIMP PIN COAX CONTACT 75Ω
FOR PIC V73263 CABLEIssue:
Jan. 24, 2022Page
1/1**MATERIAL:**

- OUTER CONTACT : BRASS PER ASTM B 16 OR ASTM B 453 OR EN 12164
- CENTER CONTACT : BERYLLIUM COPPER PER ASTM B 196
- FERRULE : BRASS PER ASTM B 16 OR ASTM B 453 OR EN 12164
- DIELECTRIC : PTFE PER ASTM-D-1710 OR EQUIVALENT
- ALIGNMENT BOOT : THERMOPLASTIC PER MIL 46174

FINISHES:

- FERRULE, OUTER AND CENTER CONTACTS : PLATING .00005 INCH OF GOLD PER SAE AMS-2422 OVER NICKEL PER AMS 2403

TOOLING:


- CENTER CONTACT : CRIMPING TOOL M22520/2-01 (RADIAL 282281)
SELECTOR ON 5
POSITIONNER 282587 (DANIELS K1025-S)
- FERRULE : CRIMPING TOOL M22520/5-01 (RADIAL 282293)
DIE M22520/5-05 (RADIAL 282246)
HEX B 4,50 (.177) ON FLATS

EXTRACTION TOOL:

- M81969/28-03 RADIAL 282549001

WIRING INSTRUCTIONS: SEE MICT0100052

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 3,60 g

CREATION

PEN: 21002882

NOM: BRANJONNEAU V.

DATE: Jan. 24, 2022

APPR.: LEGENDRE T.

Issue

Revisions

Name

Approved

618139002EN

RADIAL PROPRIETARY INFORMATION