


PAGE 1/2

ISSUE
25-04-24B

SERIES
COUPLER


PART NUMBER **R433823000**

Scale 2 : 1

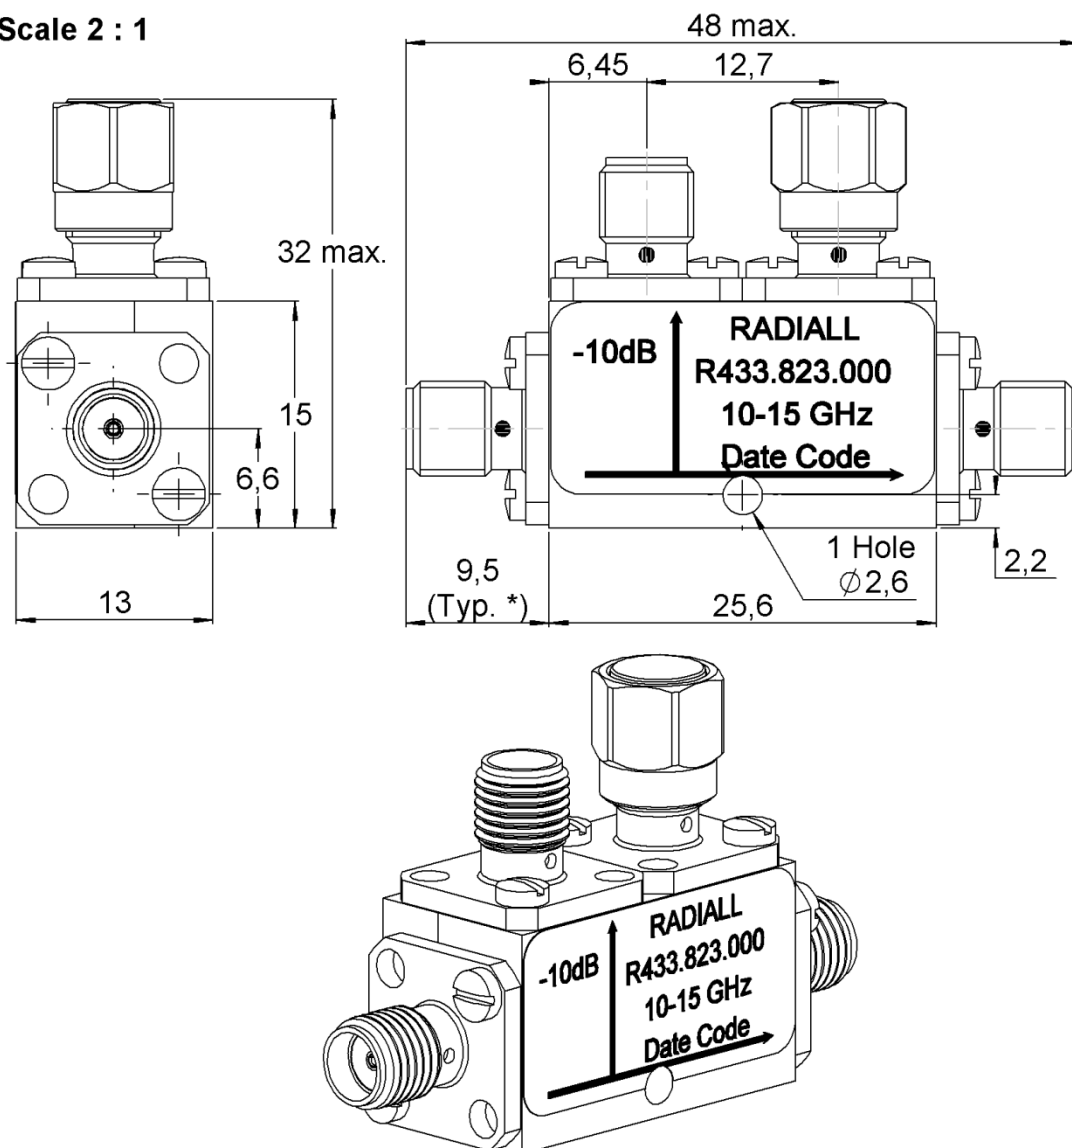

All dimensions are in mm. Tolerances according ISO 2768 c-K

Weight ($\pm 15\%$) **27,0400 g**
Specification



PAGE 2/2

ISSUE
25-04-24B

SERIES
COUPLER

PART NUMBER **R433823000**

ELECTRICAL CHARACTERISTICS

Frequency operating range :	10 – 15 GHz
Impedance :	50 Ω
VSWR : - Main Line	1.35 max.
- Coupled Line	1.35 max.
Nominal Coupling :	10 dB
Coupling Precision :	± 1 dB
Directivity :	15 dB mini
Insertion loss :	1 dB max.
Frequency Sensitivity :	± 0.5 dB
Average Power at 25°C	50W
Peak Power at 25°C	3000W

MECHANICAL CHARACTERISTICS

Connector type :	SMA female per MIL-C 39012
Coaxial Termination :	SMA, 50 Ω , 1W

ENVIRONMENTAL CHARACTERISTICS

Operating temperature :	-25°C / +85°C
Storage temperature :	-25°C / +85°C