


Series  
MULTI

NON ENVIRONMENTAL SIZE 8 QUADRAX SOCKET CONTACT FOR NF24Q100 AND NF26Q100 CABLES


Issue:  
Feb. 06, 2024Page  
1/1

## DESIGNED PER ARINC 600


## OUTER CONTACT

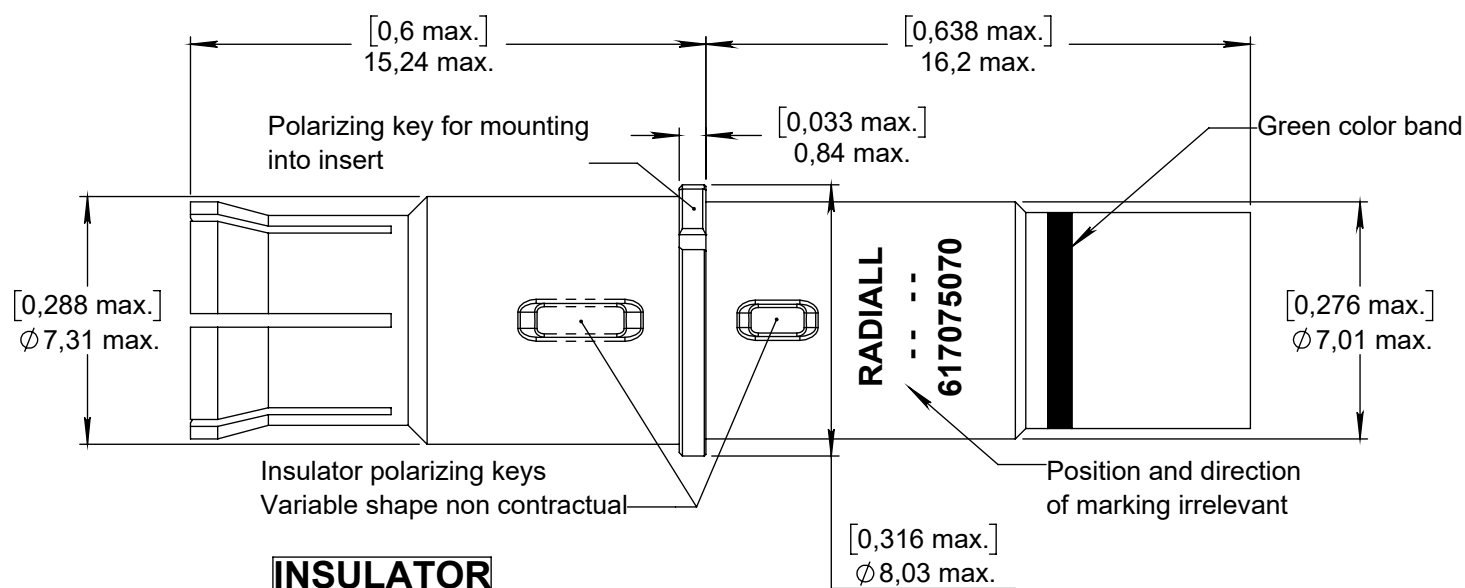


## INSULATOR

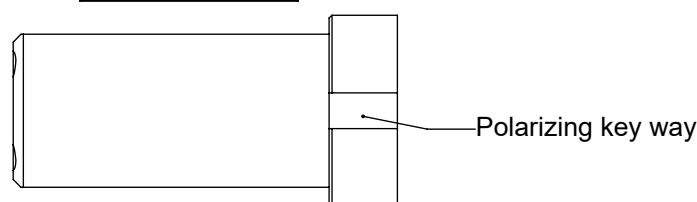



## CENTER CONTACTS

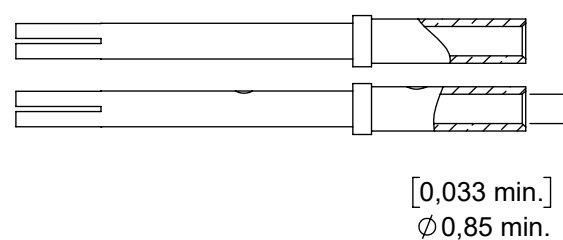

## SPACER

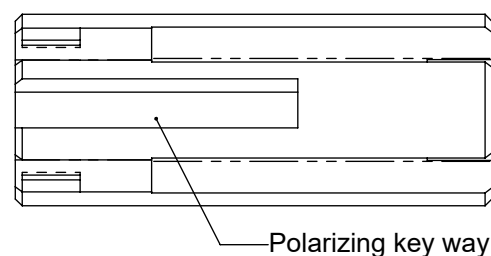

## FERRULE

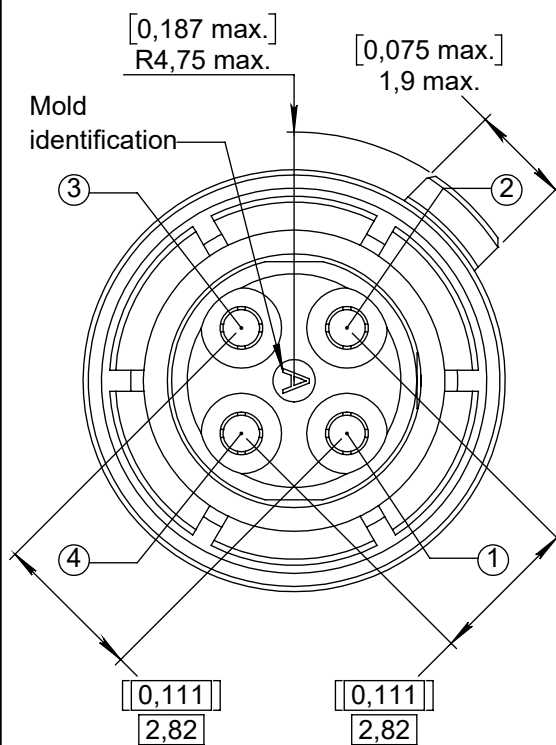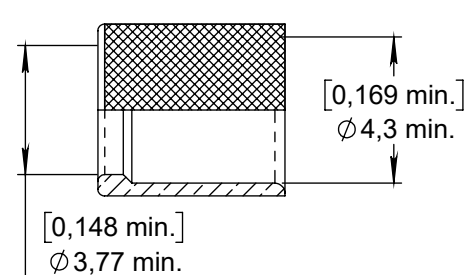

## ENGAGING FACE

## MATERIAL &amp; FINISH:


- OUTER CONTACT: COPPER ALLOY; 0,8 $\mu$ m [0,000031 inch] MIN. OF GOLD OVER NICKEL
- CENTER CONTACTS: COPPER ALLOY; 1,27 $\mu$ m [0,00005 inch] MIN. OF GOLD OVER NICKEL
- FERRULE: COPPER ALLOY; 0,5 $\mu$ m [0,000019 inch] MIN. OF GOLD OVER NICKEL
- INSULATOR: THERMOPLASTIC
- SPACER: THERMOPLASTIC

**EXTRACTION TOOL :** RADIAL 282549001 OR RADIAL 282549051 (M81969/14-12)  
(Refer to the connector series instructions)

## WIRING INSTRUCTION:

CABLE	WIRING INSTRUCTION
NF26Q100	MICT0400011
NF24Q100	RP57339

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 5 g

## CREATION

PEN: 21002601

NOM: PECAULT B.

DATE: Mar. 09, 2023

CHEC.: LEGENDRE T.

Feb. 06, 24

Extraction tool part numbers corrected.

LOPEZ C.

WEIHS H.

Issue

Revisions

Name

Checked

617075070EN

RADIAL PROPRIETARY INFORMATION