
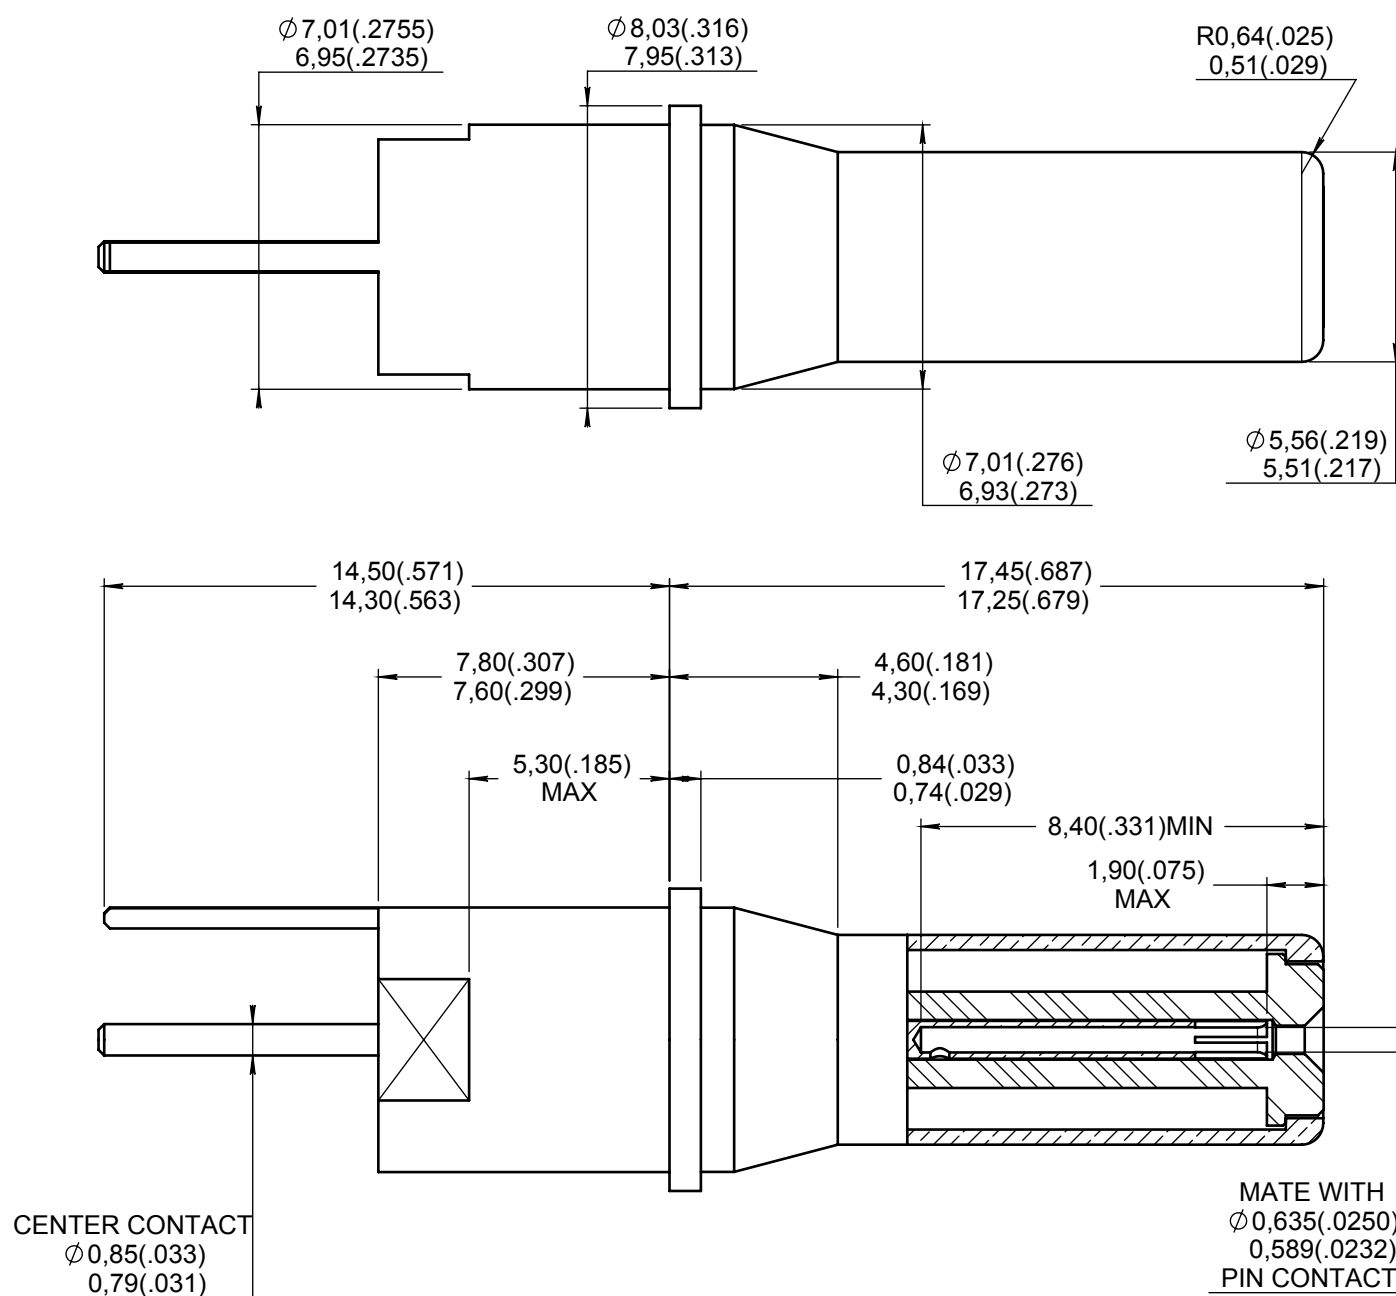
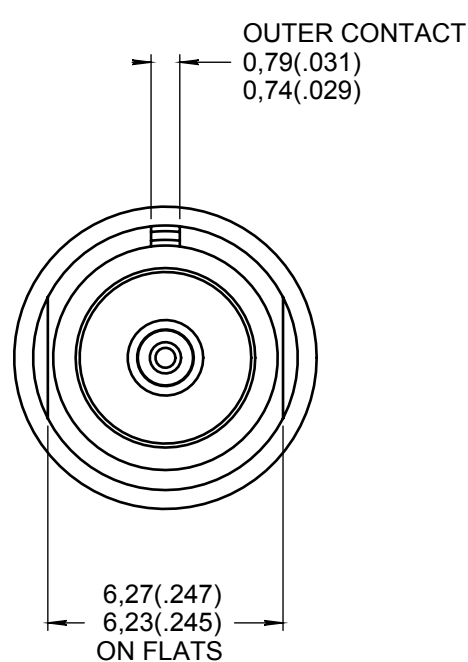
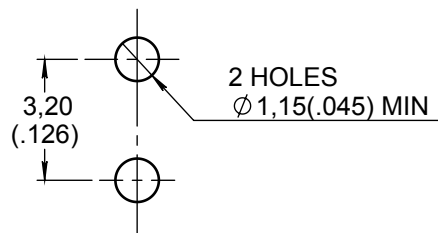


Series  
MPXSIZE 8 FRONT RELEASE, FRONT REMOVABLE  
PC POST PIN COAX CONTACT  
TYPICAL IMPEDANCE: 75 OHMSIssue:  
April 04, 2013Page  
1/1RECOMMENDED  
PC DRILL PATTERN


MATERIAL:  
-OUTER CONTACT: BRASS PER ASTM B 16 OR ASTM B 453 OR EN 12164  
-CENTER CONTACT: BERYLLIUM COPPER PEZR ASTM B 196  
-DIELECTRIC: PTFE PER ASTM D 1710 OR EQUIVALENT

FINISH:  
-ALL METAL PARTS: PLATING .00005 INCH OF GOLD PER SAE 2422 OVER NICKEL PER SAE AMS QQ N 290

EXTRACTION TOOL: RADIAL P/N 282 549 009

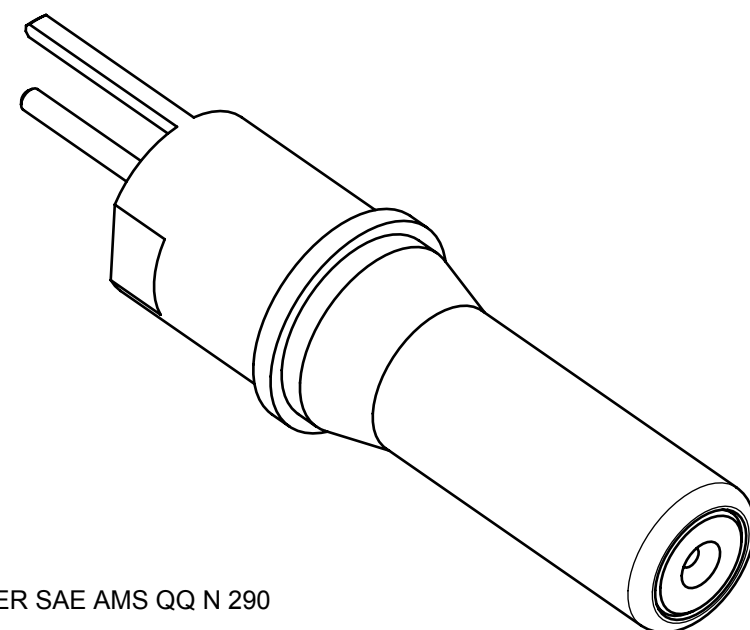

DIMENSIONS : mm (inch are given for information only)



CREATION				
PEN: M070009126A				
NOM: MACARI	Apr. 04, 13	Mistake dimensions : 14,90/15,25 -> 17,25/17,45 4,70 max -> 5,30 max	Branjonneau	Dupuis
DATE: 15 MARCH 07	July 06, 07	619 141 001 WAS RP60901	MACARI	/
APPR.: LEGENDRE	Issue	Revisions	Name	Approved

619141001EN

RADIAL PROPRIETARY INFORMATION

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112\_9311