


Series  
NSX


NON ENVIRONMENTAL SIZE 8 QUADRAX PIN CONTACT  
FOR NF22Q100 CABLE

Issue:  
June 17, 2015

Page  
1/1

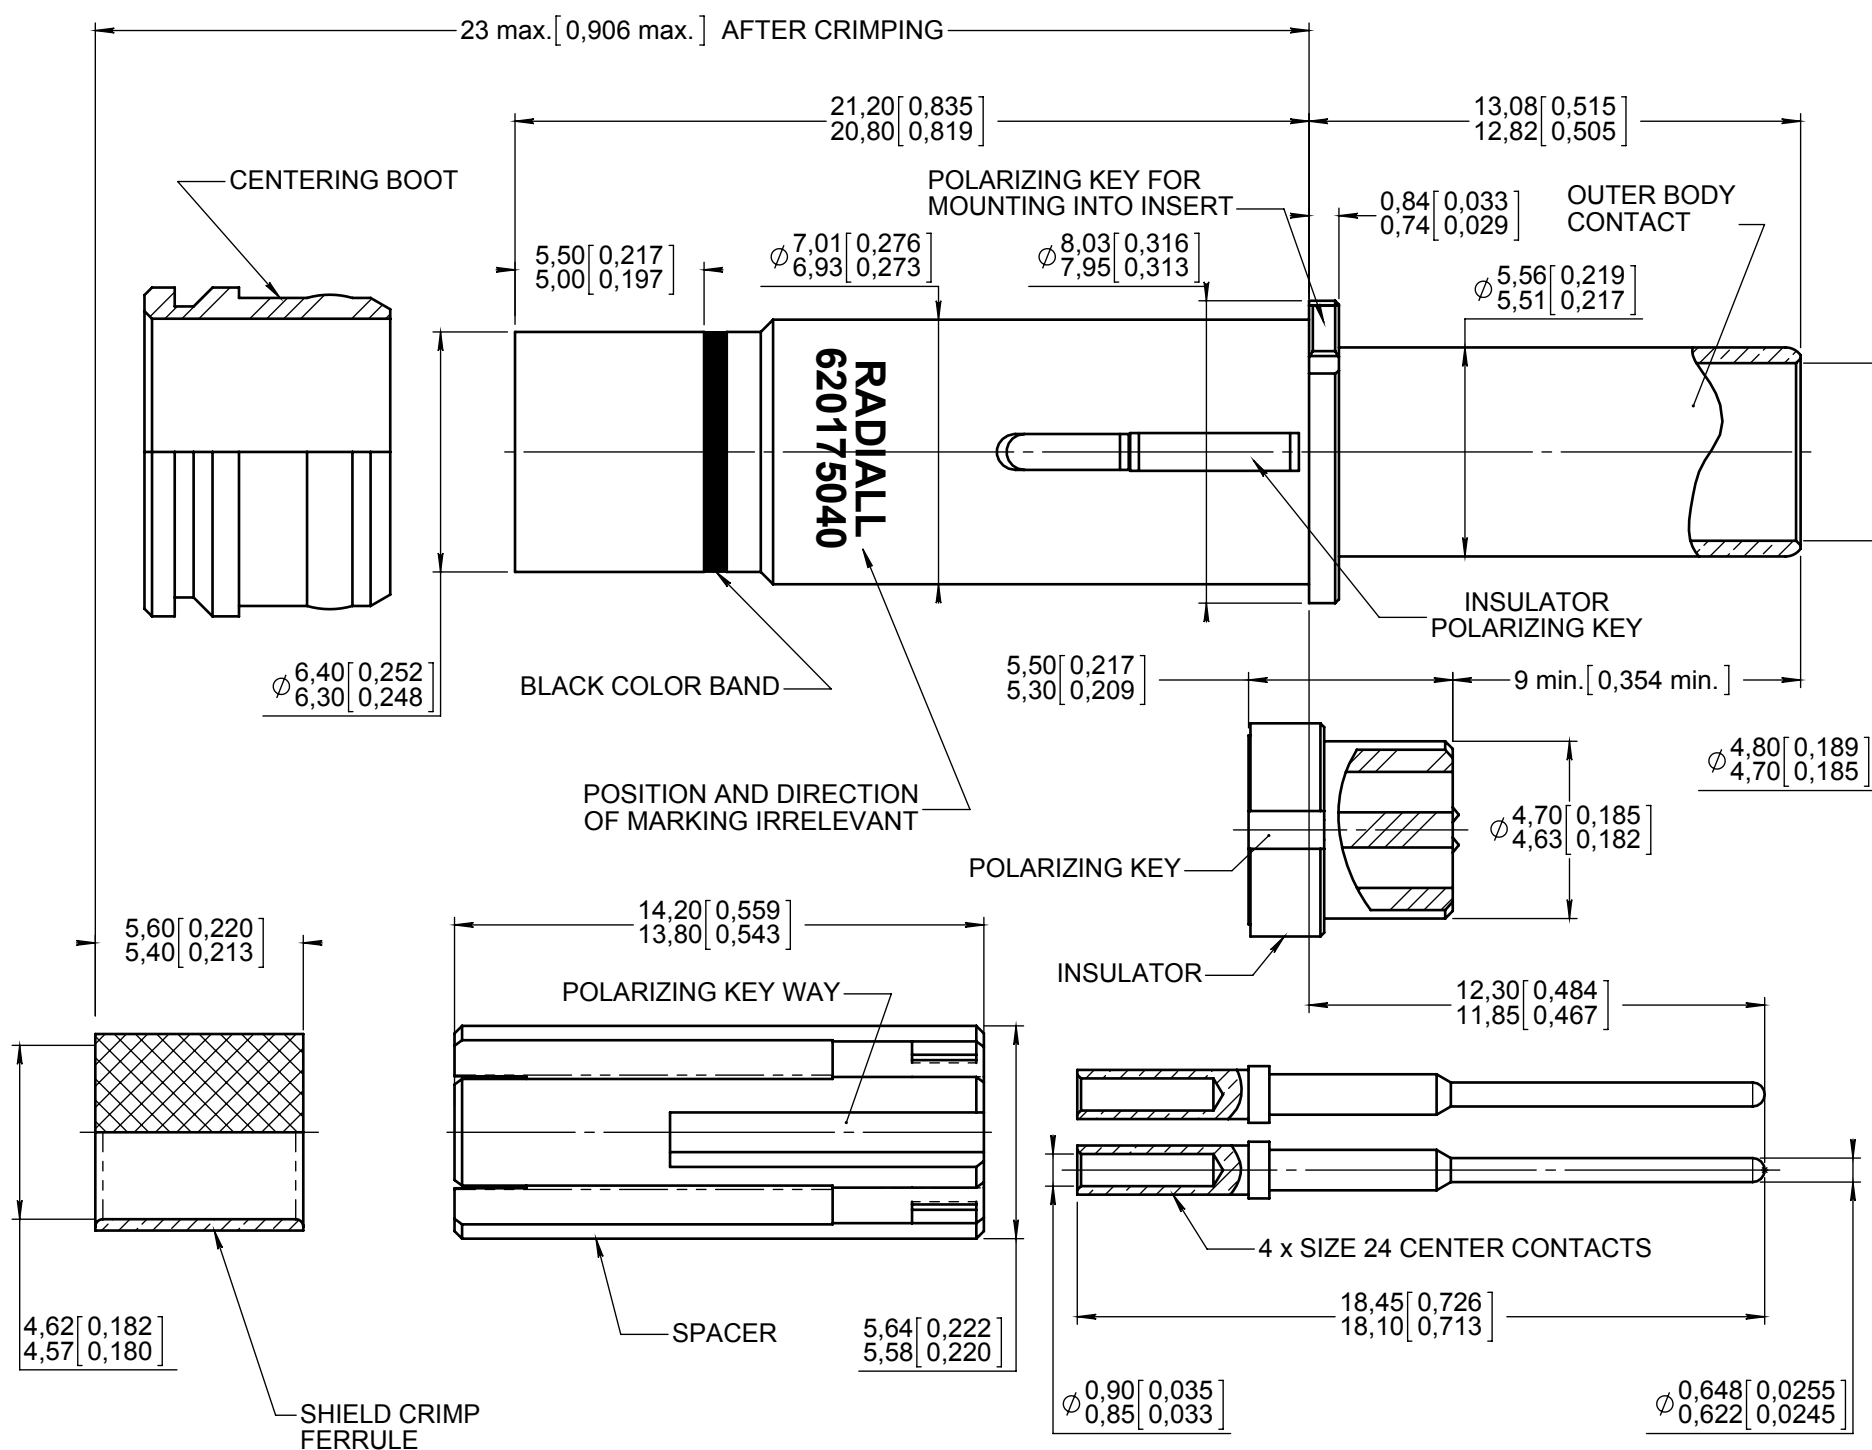

## ENGAGING FACE

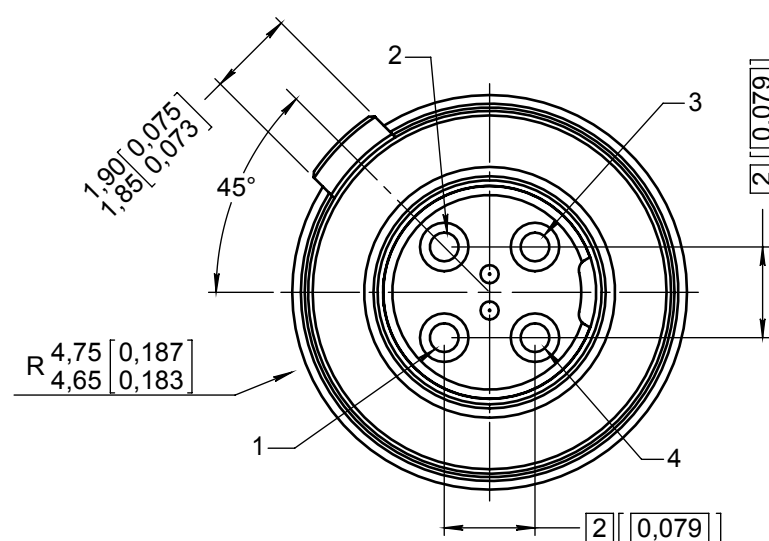

### MATERIAL:

- OUTER, CENTER CONTACTS AND FERRULE : COPPER ALLOY
- INSULATOR : PTFE PER ASTM-D-1710 OR EQUIVALENT
- SPACER : THERMOPLASTIC PER ASTM D 5205

### FINISH:

- ALL METAL PARTS:  
PLATING .00005 INCH OF GOLD PER MIL-G-45204 TYPE I OR II  
GRADE C OR D CLASS 1 OVER NICKEL PER QQ-N-290


### EXTRACTION TOOL:

- M81969/28.03 (RADIAL: 282 549 001) OR M81969/14-06

### WIRING INSTRUCTIONS: MICT0400006

**NOTE:** HEAT SHRINKABLE SLEEVE INCLUDED

DIMENSIONS : mm (inch are given for information only)



Estimated weight : 4,20 g

CREATION				
PEN: 20152863	June 17, 15	"NOT YET VALIDATED" removed Mistake on ferule inner diameter	Branjonneau V.	Legendre T.
NOM: BRANJONNEAU V.	May 05, 15	Ferule and outer body design updated Added heat shrinkable sleeve	Branjonneau V.	Legendre T.
DATE: Mar. 17, 2015	Apr. 03, 15	Added note "NOT YET VALIDATED"	Branjonneau V.	Legendre T.
APPR.: LEGENDRE T.	Issue	Revisions	Name	Approved

620175040EN

RADIAL PROPRIETARY INFORMATION