


PAGE 1/2


ISSUE 26-05-23A

SERIES SPPC

PART NUMBER SPPC-PWL-2.0-PS-E-GN-TH5

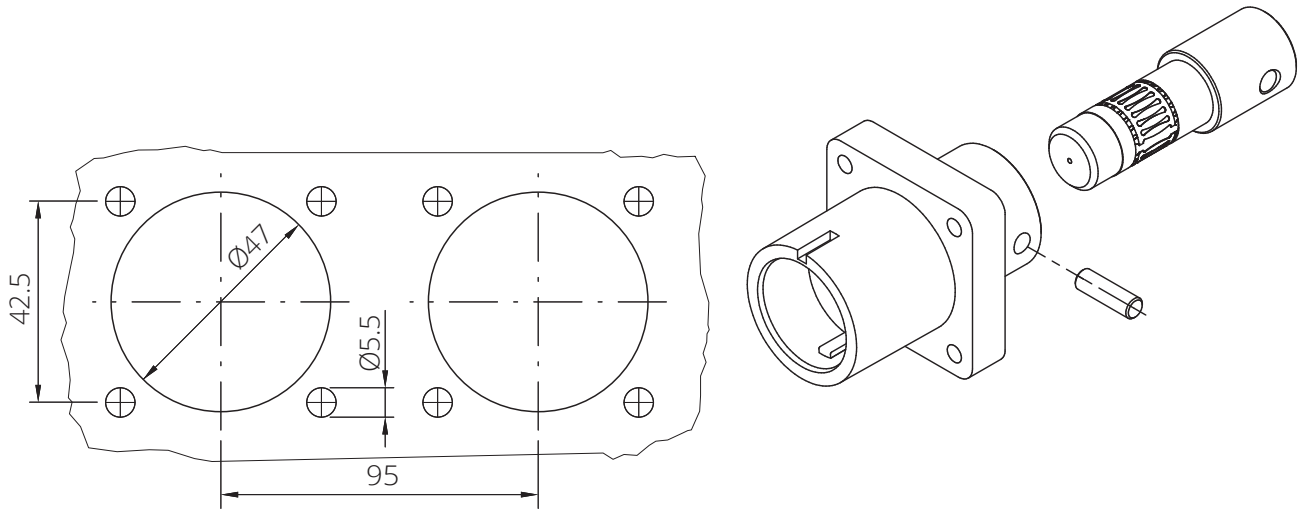


panel cut out

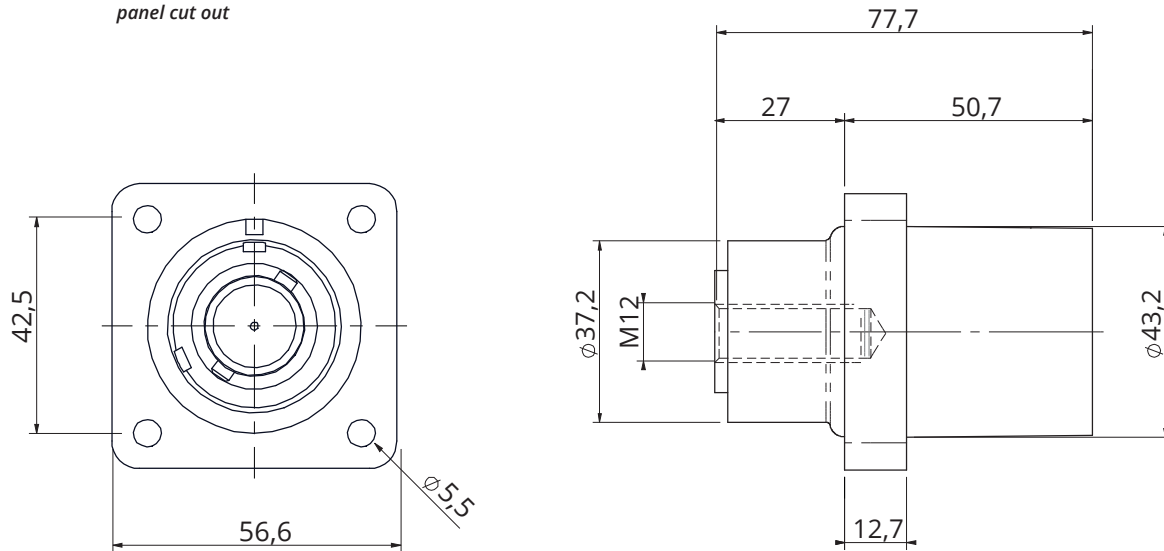

## Code details

Dimensions in mm

Series Code	SPPC-PWL-2.0	Single Pole Power connectors
Connector Type	PS	Panel Source
Key Position	E	Earth
Insulator Color	GN 	Green
Contact Termination	TH5	Threaded hole – 500A
Cable External diameter	-	-
Contacts Type	-	Standard contacts
Customization	-	-

PAGE 2/2

ISSUE 26-05-23A

SERIES SPPC

PART NUMBER SPPC-PWL-2.0-PS-E-GN-TH5

## Connector Type:

Number of contacts: Single Pole  
Panel Source connectors  
Green Color  
Locking: Bayonet  
Threaded hole  
Finger Touch protected contacts IP2X

## Reference Documents:

- EN 61984
- EN 60529
- European Directive 2011/65/UE (RoHS)
- UL94

## General features:

Operating temperatures: -30°C ÷ +125°C  
Protection degree (mated connectors; according to EN 60529): IP66/67  
Flammability: UL94-V0  
Minimum Mating Cycles: 500

## Electrical specifications:

Nominal Voltage: 1000 Vac / 1500 Vdc  
Current Rating: 500A  
Minimum Insulation Resistance: 5GΩ @ 500V  
Contact Resistance: <0.1 mΩ  
Rated Voltage to Earth: 2000Vac  
Minimum Flashover (EN60309-1): 6.8kV AC – 1 minute  
Test Voltage (Mated Condition): 5 kV– 1 minute @ 50Hz  
Short Circuit Current – 1 second: 16kA  
Short Circuit Current – 3 seconds: 12kA  
Surge Current (DIN VDE 0102/1.90): 62kA – 10mseconds  
Creepage Distance: >25mm  
Clearance Distance: >25mm

## Others characteristics:

Panel Contact Tightening Torque: 30Nm max  
Contact Retention in Insulator: 2.5kN Axial Load

UL certified (File n° E483437)



COMPONENTS	MATERIALS	PLATING / FINISHES	ACCESSORIES (included)		
Shells	Thermoplastic	-	P/N	Description	Quantity
Contacts	Copper Alloy	Silver Plated	-	-	-
Panel Gasket	-	-	-	-	-
Others part	-	-	-	-	-

## PACKAGING

Quantity	Type	Weight
1	Plastic Bags	-
-	Carton Box	-