

PAGE 1/2

ISSUE 22-03-22

SERIE : DPDT

PART NUMBER : R577062017

RF CHARACTERISTICS

Frequency range : 0 - 3 GHz
Impedance : 50 Ohms

| Frequency (GHz) | DC - 1 | 1 - 2 | 2 - 3 |
|--------------------|---------|---------|---------|
| VSWR max | 1.15 | 1.20 | 1.25 |
| Insertion loss max | 0.15 dB | 0.20 dB | 0.25 dB |
| Isolation min | 85 dB | 80 dB | 75 dB |
| Average power (*) | 700 W | 500 W | 400 W |

ELECTRICAL CHARACTERISTICS

Actuator : LATCHING
Nominal current ** : 320 mA
Actuator voltage (Vcc) : 12V (10.2 to 13V) / POSITIVE COMMON
Terminals : 9 pins D-SUB male connector
Indicator rating : 1 W / 30 V / 100 mA
Self cut-off time : 40 ms < CT < 120 ms

MECHANICAL CHARACTERISTICS

Connectors : N female per MIL-C 39012
Life : 2.5 million cycles
Switching Time*** : < 15 ms
Construction : Splashproof
Weight : < 215 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C
Storage temperature range : -55°C to +85°C

(* Average power at 25°C per RF Path)

(** At 25° C ±10%)

(*** Nominal voltage ; 25° C)




PAGE 2/2

ISSUE 22-03-22

SERIE : DPDT

PART NUMBER : R577062017


DRAWING

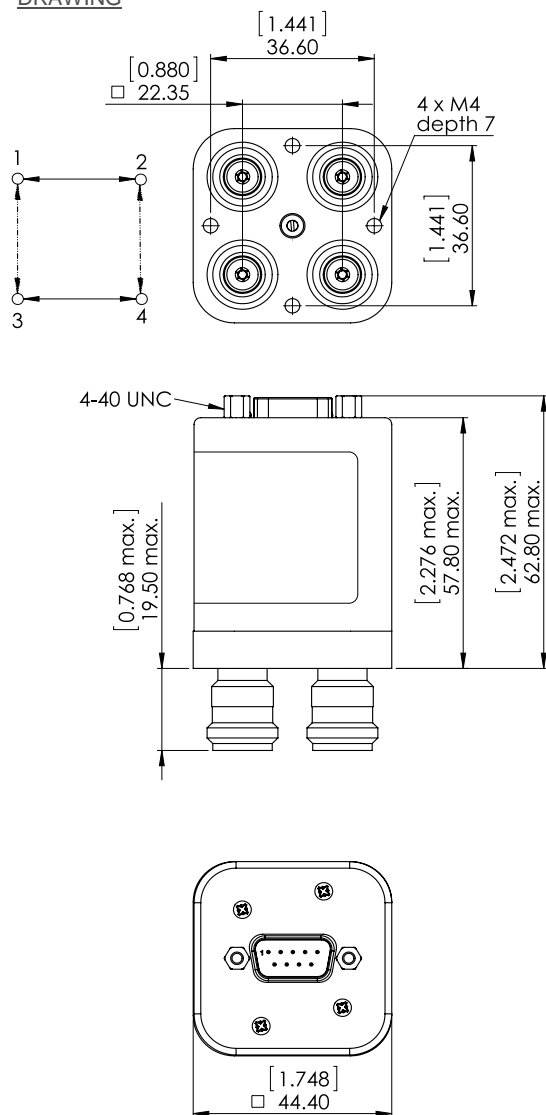


General tolerances : $\pm 0,5$ mm [0,02 in]



LABEL

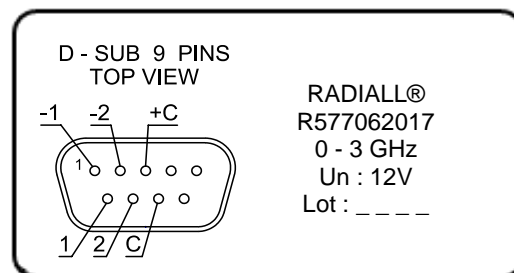

SCHEMATIC DIAGRAM

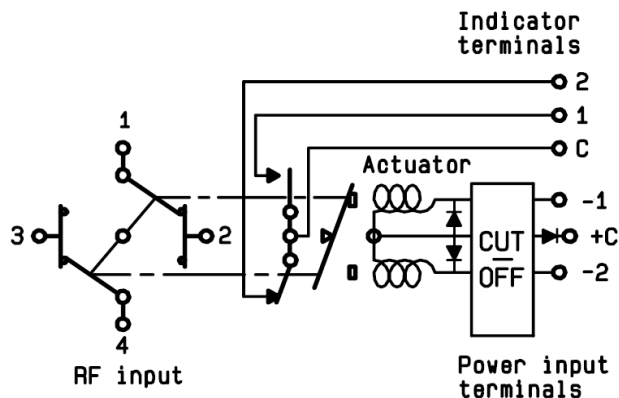

| Voltage | RF Continuity | Ind. |
|---------|---------------|------|
| +C -1 | 1 ↔ 3 / 2 ↔ 4 | C.1 |
| +C -2 | 1 ↔ 2 / 3 ↔ 4 | C.2 |