

PAGE 1/2

ISSUE 22-03-22

SERIE : SPnT

PART NUMBER : R573212425

## RF CHARACTERISTICS

Number of ways : 4  
Frequency range : 0 - 3 GHz  
Impedance : 50 Ohms

Frequency (GHz)	DC - 3
VSWR max	1.20
Insertion loss max	0.20 dB
Isolation min	80 dB
Average power (*)	400 W

## ELECTRICAL CHARACTERISTICS

Actuator : NORMALLY OPEN  
Nominal current \*\* : 250 mA  
Actuator voltage (Vcc) : 12V (10.2 to 13V)  
Terminals : 25 pins D-SUB male connector  
Indicator rating : 1 W / 30 V / 100 mA  
TTL inputs (E) - High level : 2.2 to 5.5 V / 800µA at 5.5 V  
- Low level : 0 to 0.8 V / 20µA at 0.8 V

## MECHANICAL CHARACTERISTICS

Connectors : BNC female per MIL-C 39012  
Life : 2 million cycles per position  
Switching Time\*\*\* : < 15 ms  
Construction : Splashproof  
Weight : < 460 g

## ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C  
Storage temperature range : -55°C to +85°C

(\* Average power at 25°C per RF Path)

(\*\* At 25° C ±10%)

(\*\*\* Nominal voltage ; 25° C)




PAGE 2/2

ISSUE 22-03-22


SERIE : SPnT

PART NUMBER : R573212425

DRAWING

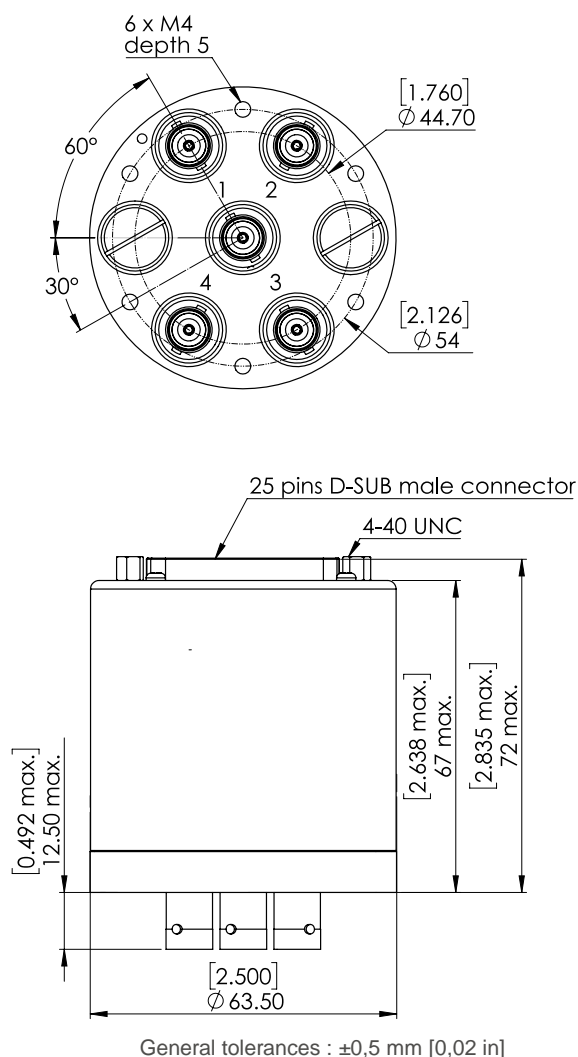

TTL input	RF Continuity	Ind.
E1 = 1	IN $\leftrightarrow$ 1	D.E
E2 = 1	IN $\leftrightarrow$ 2	D.F
E3 = 1	IN $\leftrightarrow$ 3	D.G
E4 = 1	IN $\leftrightarrow$ 4	D.H

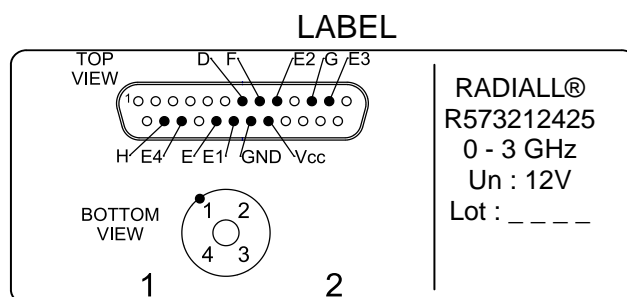

SCHEMATIC DIAGRAM

