

PAGE 1/2

ISSUE 22-03-22

SERIE : SPnT

PART NUMBER : R573493025

RF CHARACTERISTICS

Number of ways : 10
Frequency range : 0 - 18 GHz
Impedance : 50 Ohms

Frequency (GHz)	DC - 3	3 - 8	8 - 12.4	12.4 - 15.5	15.5 - 18
VSWR max	1.20	1.30	1.40	1.50	1.70
Insertion loss max	0.20 dB	0.30 dB	0.40 dB	0.50 dB	0.70 dB
Isolation min	80 dB	70 dB	60 dB	60 dB	55 dB
Average power (*)	240 W	150 W	120 W	110 W	100 W

ELECTRICAL CHARACTERISTICS

Actuator : LATCHING
Nominal current ** : 500 mA
Actuator voltage (Vcc) : 28V (24 to 30V)
Terminals : 25 pins D-SUB male connector
Indicator rating : 1 W / 30 V / 100 mA
Self cut-off time : 40 ms < CT < 120 ms
TTL inputs (E) - High level : 2.2 to 5.5 V / 800µA at 5.5 V
- Low level : 0 to 0.8 V / 20µA at 0.8 V

MECHANICAL CHARACTERISTICS

Connectors : SMA female per MIL-C 39012
Life : 2 million cycles per position
Switching Time*** : < 50 ms
Construction : Splashproof
Weight : < 360 g

ENVIRONMENTAL CHARACTERISTICS

Operating temperature range : -40°C to +85°C
Storage temperature range : -55°C to +85°C

(* Average power at 25°C per RF Path)

(** At 25° C ±10%)

(*** Nominal voltage ; 25° C)




PAGE 2/2

ISSUE 22-03-22

SERIE : SPnT


PART NUMBER : R573493025

DRAWING

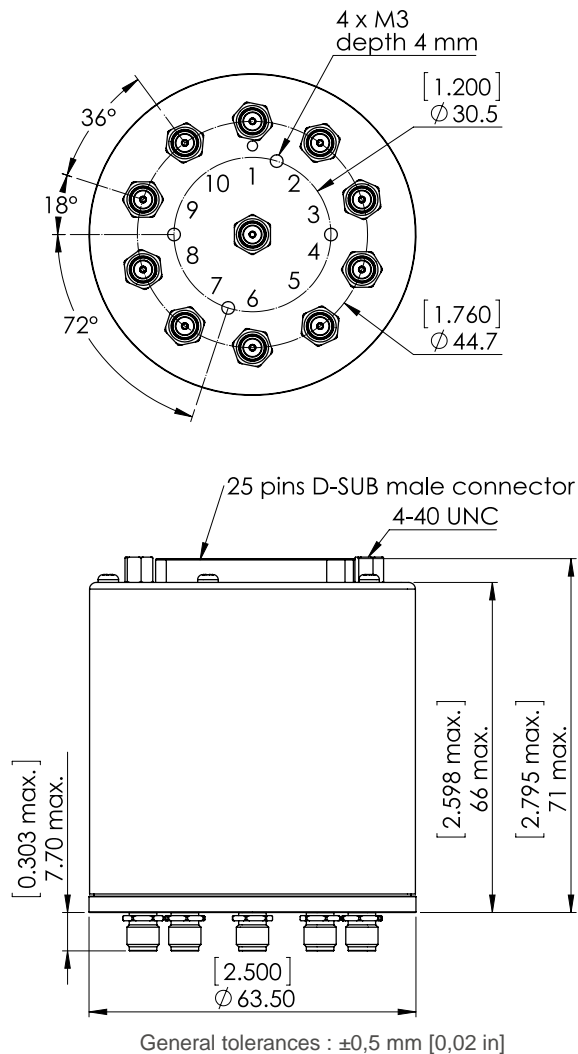

TTL input	RF Continuity	Ind.
E1 = 1	IN \leftrightarrow 1	D.E
E2 = 1	IN \leftrightarrow 2	D.F
E3 = 1	IN \leftrightarrow 3	D.G
E4 = 1	IN \leftrightarrow 4	D.H
E5 = 1	IN \leftrightarrow 5	D.I
E6 = 1	IN \leftrightarrow 6	D.J
E7 = 1	IN \leftrightarrow 7	D.K
E8 = 1	IN \leftrightarrow 8	D.L
E9 = 1	IN \leftrightarrow 9	D.M
E10 = 1	IN \leftrightarrow 10	D.N

LABEL

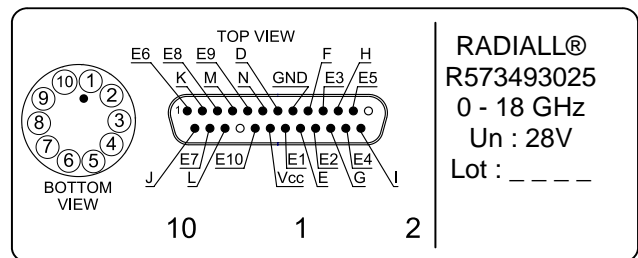

SCHEMATIC DIAGRAM

